

**Circuit breaker Btdin 60 up to 63A
(1 module per pole)****Cat. N° (s)**

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63, FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6 / C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63



Contents	Page
1. Description - Use.....	2
2. Range.....	2
3. Overall dimensions.....	2
4. Preparation – Connection.....	2
5. General characteristics.....	3
6. Compliance and approvals.....	6
7. Curves.....	7
8. Auxiliaries and accessories.....	20
9. Use in direct current.....	20

Circuit breaker Btdin 60 up to 63A (1 module per pole)


Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6 /
C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

1. DESCRIPTION - USE:

. Thermal-magnetic circuit breaker (MCB) with positive contact indication for control, protection against short-circuits and overloads, and isolation of electrical circuits.

Symbol:



Technology:

. Limiting device

2. RANGE

Polarity:

. 1P / 2P / 3P / 4P

Width:

. 1 module per pole. Each pole is 17,8 mm

Rated currents, In:

. 6 / 10 / 16 / 20 / 25 / 32 / 40 / 50 / 63A B and D curves

. 0,5 / 1 / 2 / 3 / 4 / 6 / 10 / 13 / 16 / 20 / 25 / 32 / 40 / 50 / 63A
C curve

Magnetic tripping curves:

. Curve B (between 3 and 5 In)

. Curve C (between 5 and 10 In)

. Curve D (between 10 and 20 In)

Thermal threshold according to IEC/EN 60898-1:

. Reference Temperature: 30° C

. Non operating current (I_{nf}): 1,13 In.

. Operating current (I_f): 1,45 In.

Maximum operating voltage:

. 440 V ~ with possible derating of the breaking capacity

Breaking capacity and Rated voltage (50/60 Hz):


. 6000 A in accordance with standard EN/IEC 60898-1

230 V ~ / 400 V~

. 6 kA in accordance with standard EN/IEC 60947-2

230 V ~ / 400 V~

3. OVERALL DIMENSIONS:

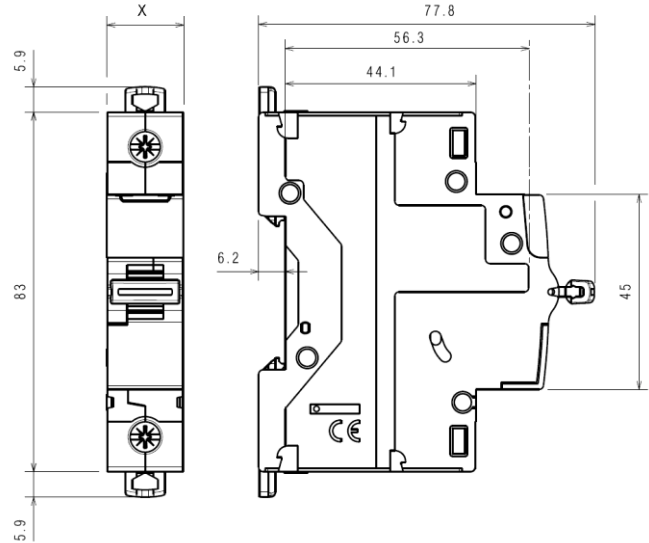

	X
1P	17.8 mm
2P / 1P+N	35.6 mm
3P	53.4 mm
4P	71.2 mm


4. PREPARATION - CONNECTION

Fixing:

. On symmetrical EN/IEC 60715 or DIN 35 rail.

Operating positions:

. Vertical Horizontal Upside Down On the side

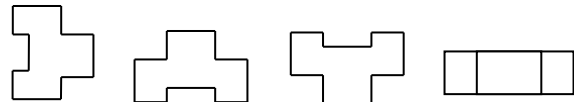

Power supply:

. From the top or the bottom.

Connection:

. Inputs and outputs via screw terminals

The location of the terminals allows supplying by traditional HX³ pin busbar and fork busbar.

Terminal depth:

. 14 mm

Stripping length recommended:

. 11 mm

Screw head:

. Mixed, slotted and Pozidriv 2.

Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6
/ C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

4. PREPARATION - CONNECTION *(continued)*

Tightening torque:

- . Recommended: 2.5 Nm.
- . Mini: 2 Nm. Maxi: 3 Nm.

Tools required:

- . For the terminals: Pozidriv n° 2 or flat screwdriver 5,5 mm (6 mm maximum).
- . For fixing: flat screwdriver 5,5 mm (6 mm maximum).

Conductor type:

	Copper cables	
	Without ferrule	With ferrule
Rigid cable	1 x 1,5 mm ² a 35 mm ² 2 x 1,5 mm ² a 16 mm ²	-
Flexible cable	1 x 1,5 mm ² a 25 mm ² 2 x 1,5 mm ² a 10 mm ²	1 x 1,5 mm ² a 25 mm ²

Aluminium cable with cross-section > 10 mm²: it is necessary to use the accessory with cat. F80ALU63

Manual actuation of the MCB:

- . By the 2-position ergonomic handle:
 - "I – ON": Closed circuit.
 - "0 – OFF": Opened circuit.

Contact status display:

- . By marking of the handle
 - "O-OFF" in white on a green background = contacts open
 - "I-ON" in white on a red background = contacts closed

Sealing:


- . Possible in "Open" position (OFF) or "Close" position (ON).

Locking:

- . By 5 mm padlock or 6 mm padlock with padlock support (cat. N° F80BL).

Labelling:

- . Circuit identification by way of a label inserted in the label holder situated on the front of the product.

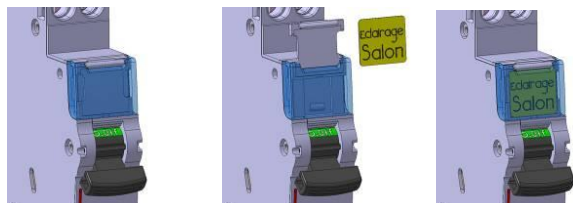

5. GENERAL CHARACTERISTICS:

Marking on the front side:

- . By permanent ink pad printing:
 - Catalogue number
 - Trade name: Btdin 60
 - Icn in kA rated breaking capacity in accordance with IEC/EN 60898-1 (in a box)
 - Limiting class "3" (in a square) for the MCB C curve with rated current ≤ 63 A.
 - Breaking curve
 - Rated current (in A)
 - Electrical scheme
 - Mark: Bticino



Marking on the lateral side:

- . Production information's and COPYTRACER:

The Copytracer number ensures that a product is traced and guarantees its production quality).

Info: <http://www.legrand-copytracer.com/>

Short-circuit breaking capacity:

- . Alternate current 50/60Hz, single-phase or three-phase network, in accordance with standard: EN/IEC 60898-1

Un		1P	2P	3P / 4P
110V~	Icn	10000 A	16000 A	-
230V~		6000 A	10000 A	10000 A
400V~		-	6000 A	6000 A

Un		1P	2P	3P / 4P
110V~	Ics	75% di Icn	75% di Icn	75% di Icn
230V~		75% di Icn	75% di Icn	75% di Icn
400V~		75% di Icn	75% di Icn	75% di Icn

- . Alternate current 50/60Hz, single-phase or three-phase network, in accordance with standard: EN/IEC 60947-2

Un		1P	2P	3P / 4P
110V~	Icu	10 kA	16 kA	-
230V~		10 kA	20 kA	20 kA
400V~		-	10 kA	10 kA

Un		1P	2P	3P / 4P
110V~	Ics	75% di Icn	75% di Icn	75% di Icn
230V~		75% di Icn	75% di Icn	75% di Icn
400V~		75% di Icn	75% di Icn	75% di Icn

Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6
/ C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

5. GENERAL CHARACTERISTICS (continued)

Short-circuit breaking capacity on one pole:

- . Three-phase network 400 V~
 - in TN neutral system, $I_{cn1} = 6 \text{ kA}$
 - in IT distribution system, $I_{it} = 1,5 \text{ kA}$
- . Three-phase network 230 V~
 - in TN neutral system, $I_{cn1} = 10 \text{ kA}$
 - in IT distribution system, $I_{it} = 3 \text{ kA}$

Minimum operating voltage:

. 12 V a.c.

Pulse rated voltage:

. $U_{imp} = 4 \text{ kV}$

Insulation rated voltage:

. $U_i = 500 \text{ V}$

Pollution degree:

. 2 in accordance with the standard EN/IEC 60898-1.

Electric strength:

. 2000 V a.c.

Operation at 400Hz:

. The magnetic thresholds increase by 45%.

Load to close and to open a pole trough the handle:

- . 0,1 Nm per pole to close.
- . 0,075 Nm per pole to open.

Mechanical endurance:

- . 20000 operation without load.
- . 10000 operation with load (under $I_n \cdot \cos \varphi = 0,9$).

Enclosure material:

- . Glow-wire test at 960° C according to IEC/EN 60898-1 and IEC 60695-2-12
- . Halogens-free

Average weight per pole:

. 0,150 kg.

Volume when packed:

	Volume (dm ³)
Single pole	0,163
Single pole + neutral Double pole	0,334
Triple pole / Four pole	0,680

Ambient temperatures:

- . Operation: from - 25°C to + 70°C
- . Storage: from - 40°C to + 70°C

5. GENERAL CHARACTERISTICS (continued)

Degree of protection:

- . Degree of protection in the terminals area:
IP 20, (in accordance with standards IEC/EN 60898-1 and IEC/EN 60529).
- . Degree of protection of the remaining parts:
IP 40 (in accordance with standards IEC/EN 60529).
- . Protection index against mechanical shocks:
IK 02 (in accordance with standards IEC/EN 62262).

Sinusoidal vibration resistance in accordance with IEC 60068.2.6:

- . Axis: x, y, z.
- . Frequency range: 5 ÷ 100 Hz; duration 90 minutes
- . Displacement (5 ÷ 13,2 Hz): 1mm
- . Acceleration (13,2 ÷ 100 Hz): 0,7g ($g=9,81 \text{ m/s}^2$)

Recognition:

- . Recognition of the circuits by label in the "label holder" on the front-side of the MCB

Power dissipated per pole (W):

- . Circuit breaker B and C curves

I_n	0,5 A	1 A	2 A	3 A	4 A	6 A	10 A
1P ÷ 4P	1.7	2	2	2	2	1,1	1.8

I_n	16 A	20 A	25 A	32 A	40 A	50A	63A
1P ÷ 4P	2	2.4	2.7	3.2	4	4.5	5,5

- . Impedance per pole (Ω) = $\frac{P \text{ dissipated}}{I_n^2}$

Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6 /
C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

5. GENERAL CHARACTERISTICS *(continued):*

Derating of circuit-breakers according to ambient temperature:

. The nominal characteristics of a circuit breaker are modified according to the ambient temperature inside the cabinet or the enclosure where the circuit breaker is located.

. Reference temperature: 30° C in accordance with EN/IEC 60898-1

In (A)	Ambient Temperature / In									
	- 25° C	- 10° C	0° C	10° C	20° C	30° C	40° C	50° C	60° C	70° C
1	1.5	1.4	1.3	1.2	1.1	1	0.9	0.8	0.7	0.6
1.5	1.9	1.8	1.7	1.7	1.6	1.5	1.5	1.4	1.4	1.3
2	2.8	2.6	2.5	2.3	2.2	2	2	1.9	1.8	1.7
3	3.8	3.6	3.5	3.3	3.2	3.0	2.9	2.8	2.7	2.6
3.5	4.5	4.2	4.0	3.9	3.7	3.5	3.4	3.3	3.2	3.1
5	6.4	6.0	5.8	5.5	5.3	5.0	4.8	4.7	4.5	4.6
6	7.5	7.0	6.6	6.4	6.2	6.0	5.8	5.6	5.4	5.3
10	12.5	11.5	11.1	10.7	10.3	10.0	9.7	9.3	9.0	8.7
13	16.3	15.0	14.3	13.9	13.4	13.0	12.6	12.1	11.7	11.3
16	20.0	18.7	18.0	17.3	16.6	16.0	15.4	14.7	14.1	13.5
20	25.0	23.2	22.4	21.6	20.8	20.0	19.2	18.4	17.6	16.8
25	31.5	29.5	28.3	27.2	26.0	25.0	24.0	22.7	21.7	20.7
30	38.3	36.0	34.5	33.0	31.5	30.0	28.8	27.3	26.1	24.9
32	41.0	37.8	36.5	34.9	33.3	32.0	30.7	29.1	27.8	26.5
40	51.0	48.0	46.0	44.0	42.0	40.0	38.0	36.0	34.0	32.0
50	64.0	60.0	57.5	55.0	52.5	50.0	47.5	45.0	42.5	40.0
63	80.6	75.6	72.5	69.9	66.1	63.0	59.8	56.1	52.9	49.7

Derating of MCB for use with fluorescent lights:

Ferromagnetic and electronic ballasts have a high inrush current for a short time. These currents can cause the tripping of circuit breakers. At the time of the installation, it should take into account the maximum number of ballasts per circuit breaker that the manufacturers of lamps and ballasts indicate in their catalogues.

Influence of the altitude:

	≤2000 m	3000 m	4000 m
Dielectric holding	3000 V	2500 V	2000 V
Max operational Voltage	400 V	400 V	400 V
Derating at 30° C	none	none	none

Derating of MCBs function of the number of devices side by side:

When several MCBs are juxtaposed and operate simultaneously, the thermal evacuation of the poles is limited. This results in an increase in operating temperature of the circuit breakers which can cause unwanted tripping. It is recommended to apply the following coefficients to the rated currents.

Number of circuit breakers side by side	Coefficient
2 - 3	0.9
4 - 5	0.8
6 - 9	0.7
≥ 10	0.6

These values are given by the recommendation of IEC 60439-1.

To avoid using these coefficients, it is necessary to allow a good ventilation and to separate the devices with 0.5 module spacing elements (cat. N° F80/05D).

Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6
/ C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

6. CONFORMITIES AND APPROVALS

In accordance with standards:

- . IEC/EN 60898-1 with 6000 A breaking capacity
- . EU guidelines: 2014/35/EU + 2014/30/EU
- . Bticino circuit-breakers can be used under the conditions of use as defined by IEC/EN 60947.
- . The performance of circuit-breakers can be influenced by particular climates: hot dry, cold dry, hot humid, salt fog atmosphere

Classification according to Annex Q (standard IEC/EN 60947-1):

- . Category C with a range test temperature -25°C / $+70^{\circ}\text{C}$
- . Salt fog atmosphere according IEC 60068-2-52

Environment respect – Compliance with EU directives:

- . Compliance with Directive 2011/65/EU of 08/06/11 (RoHS) and subsequent modifications and integrations.

Precious metal:

- . Silver: 0,04 g per pole $I_n \leq 16\text{ A}$; 0.08 g per pole $I_n \geq 20\text{ A}$
- . No gold

Packaging:

- . Design and manufacture of packaging in accordance with Directive 94/62/EC


Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6
/ C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

7. CHARACTERISTIC CURVES

Limiting current curve: circuit breakers B, C and D curves:

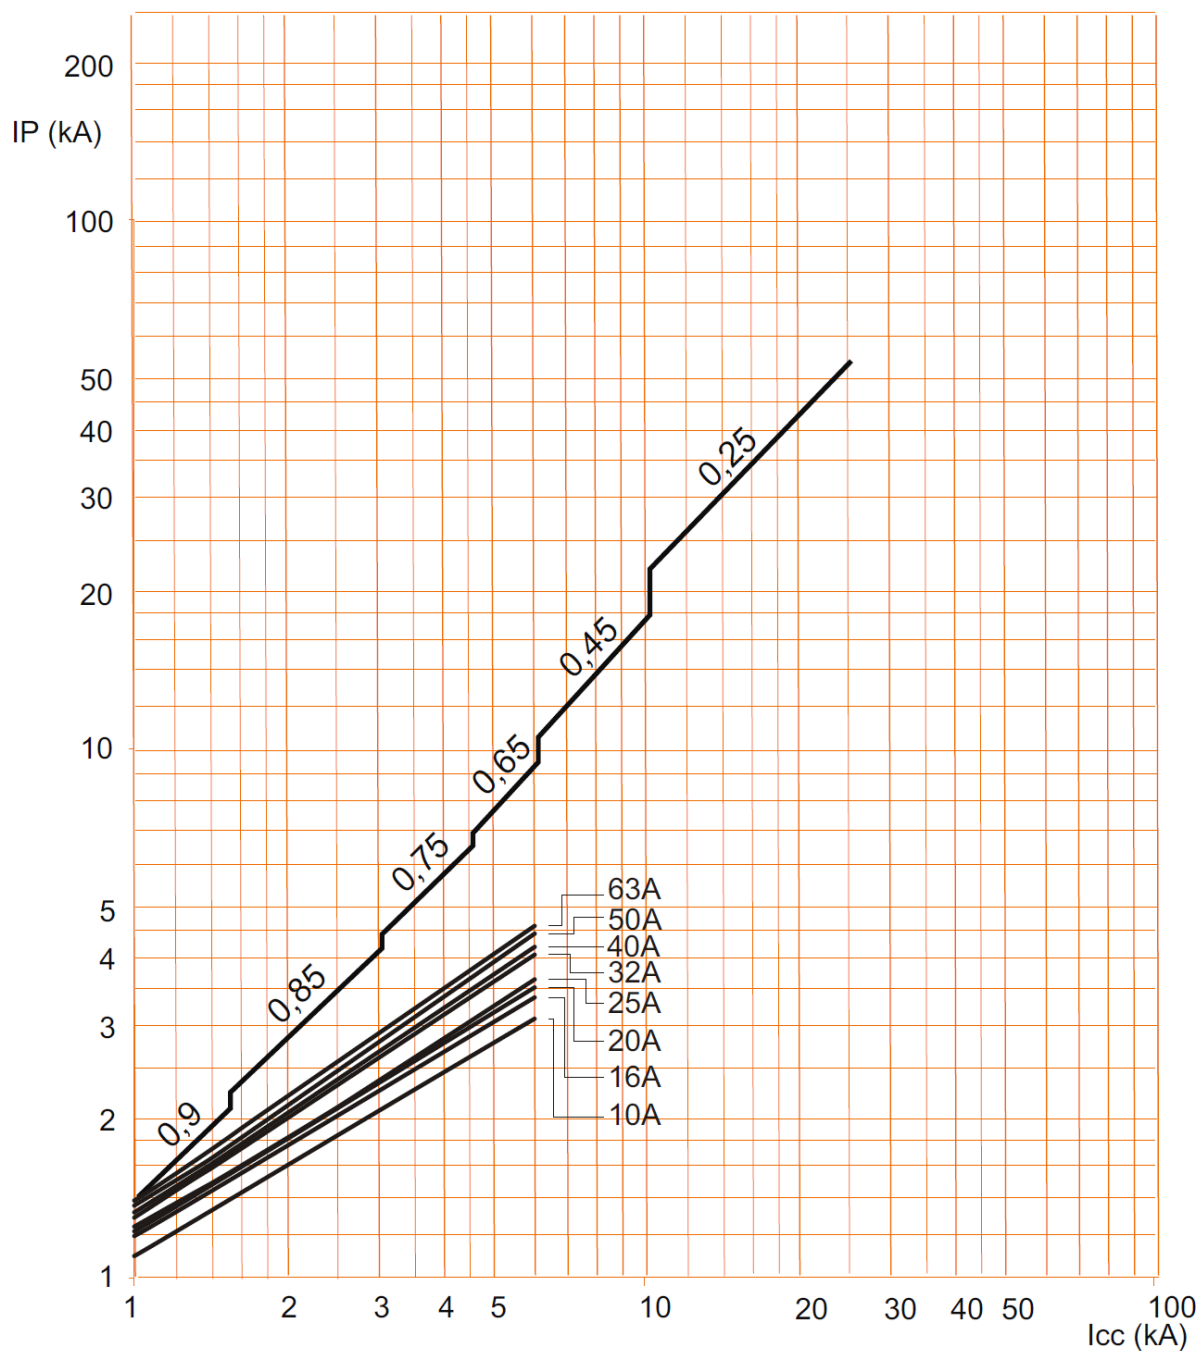

. I_{cc} = Square value of symmetric component of the short circuit current (kA).

. IP = Max peak value (kA)


Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6
/ C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

7. CHARACTERISTIC CURVES (continued)

Operating characteristic of circuit breakers B curve:

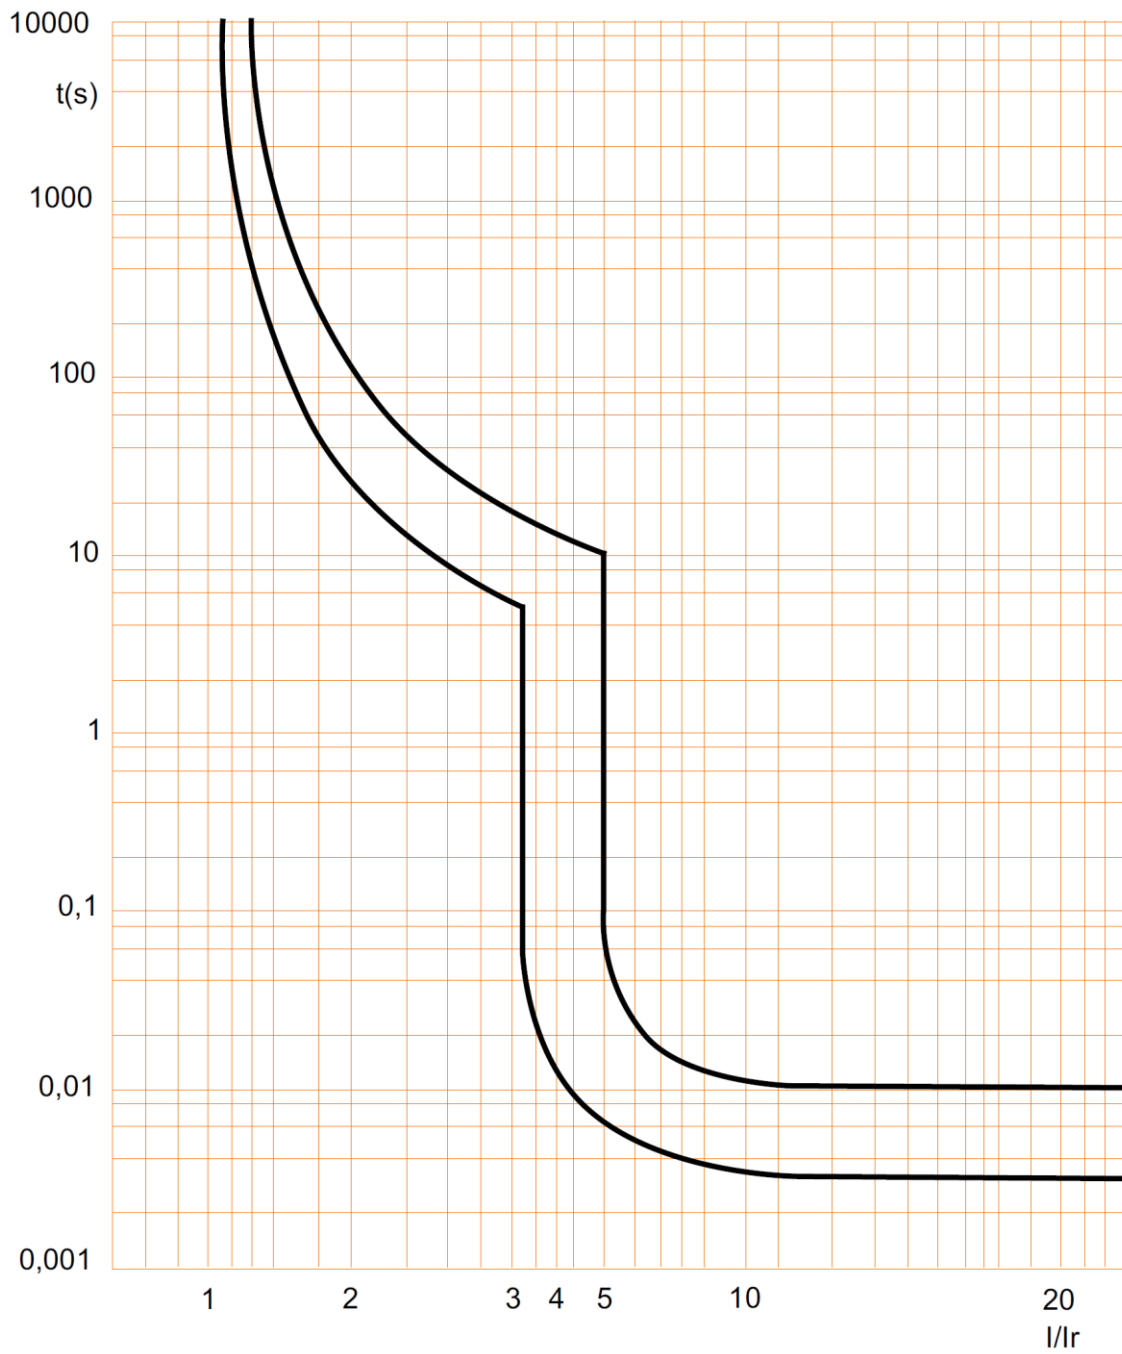


Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6
/ C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

7. CHARACTERISTIC CURVES (continued)

. Limiting thermal energy curve of circuit breakers B curve, 2P (230V~ / 50Hz):

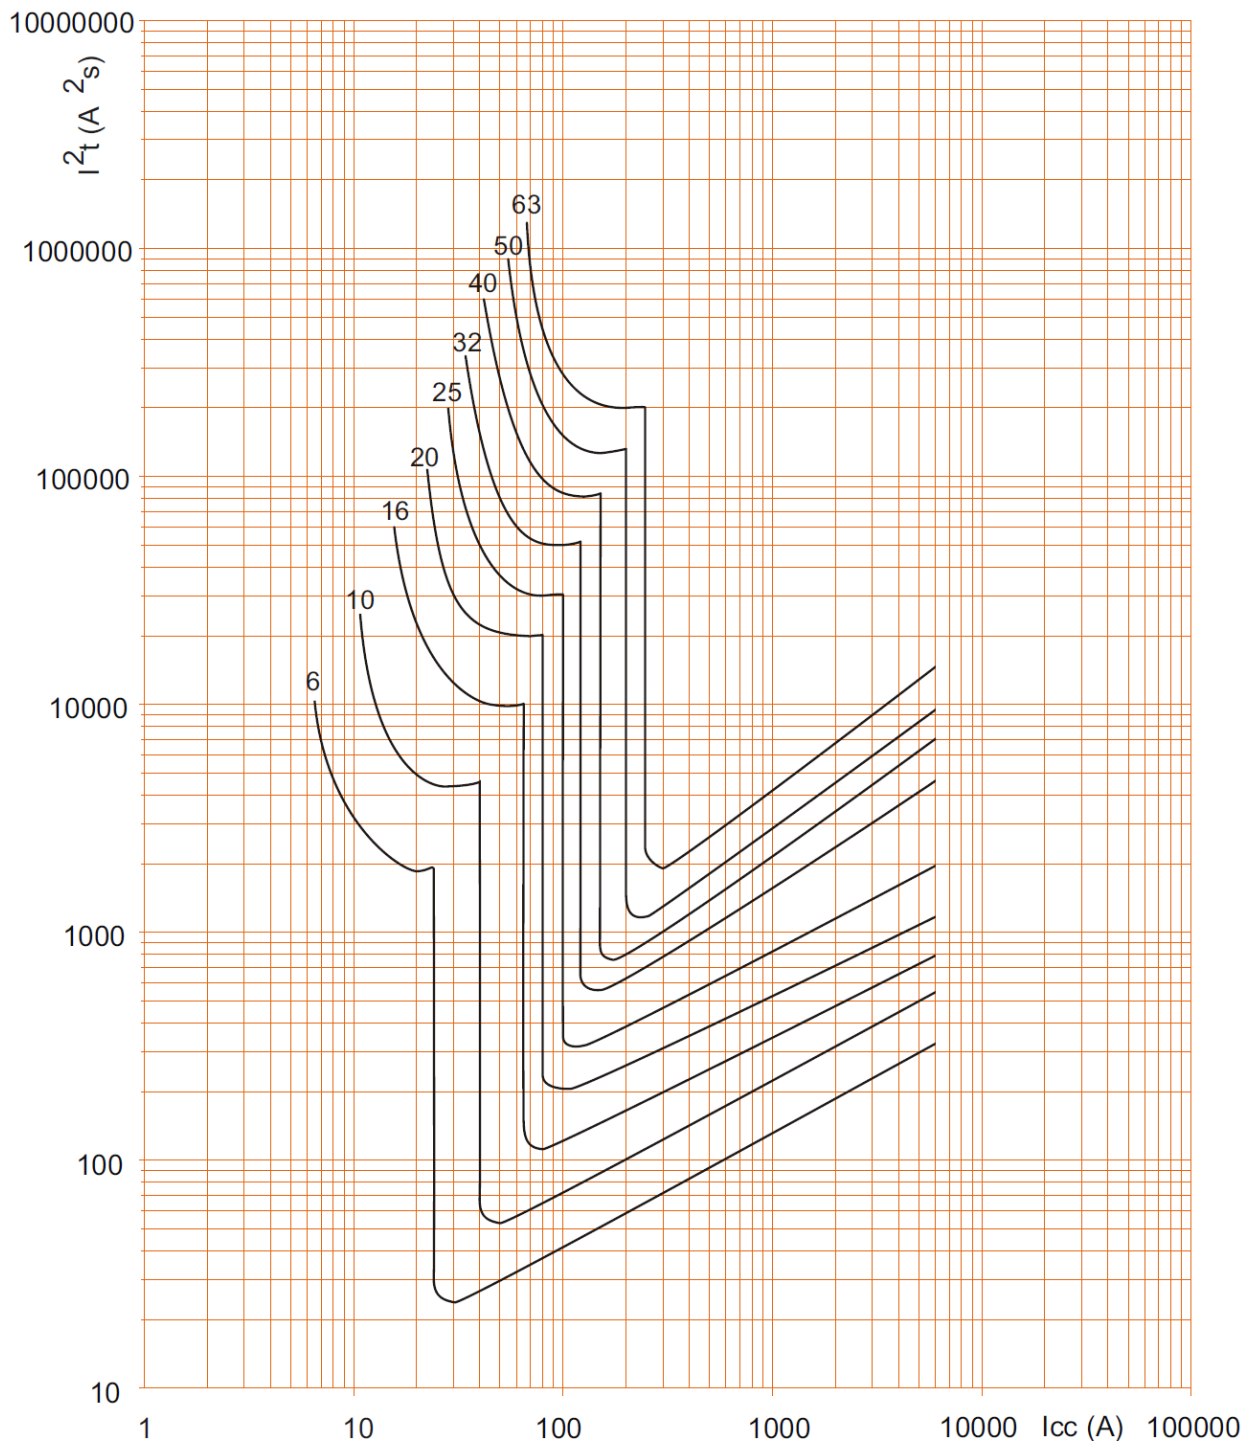

. I_{cc} = Square value of symmetric component of the short circuit current (kA).

. I^2t = Thermal energy limited (A^2s).


Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6
/ C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

7. CHARACTERISTIC CURVES (continued)

. Limiting thermal energy curve of circuit breakers B curve, 2P (400V~ / 50Hz):

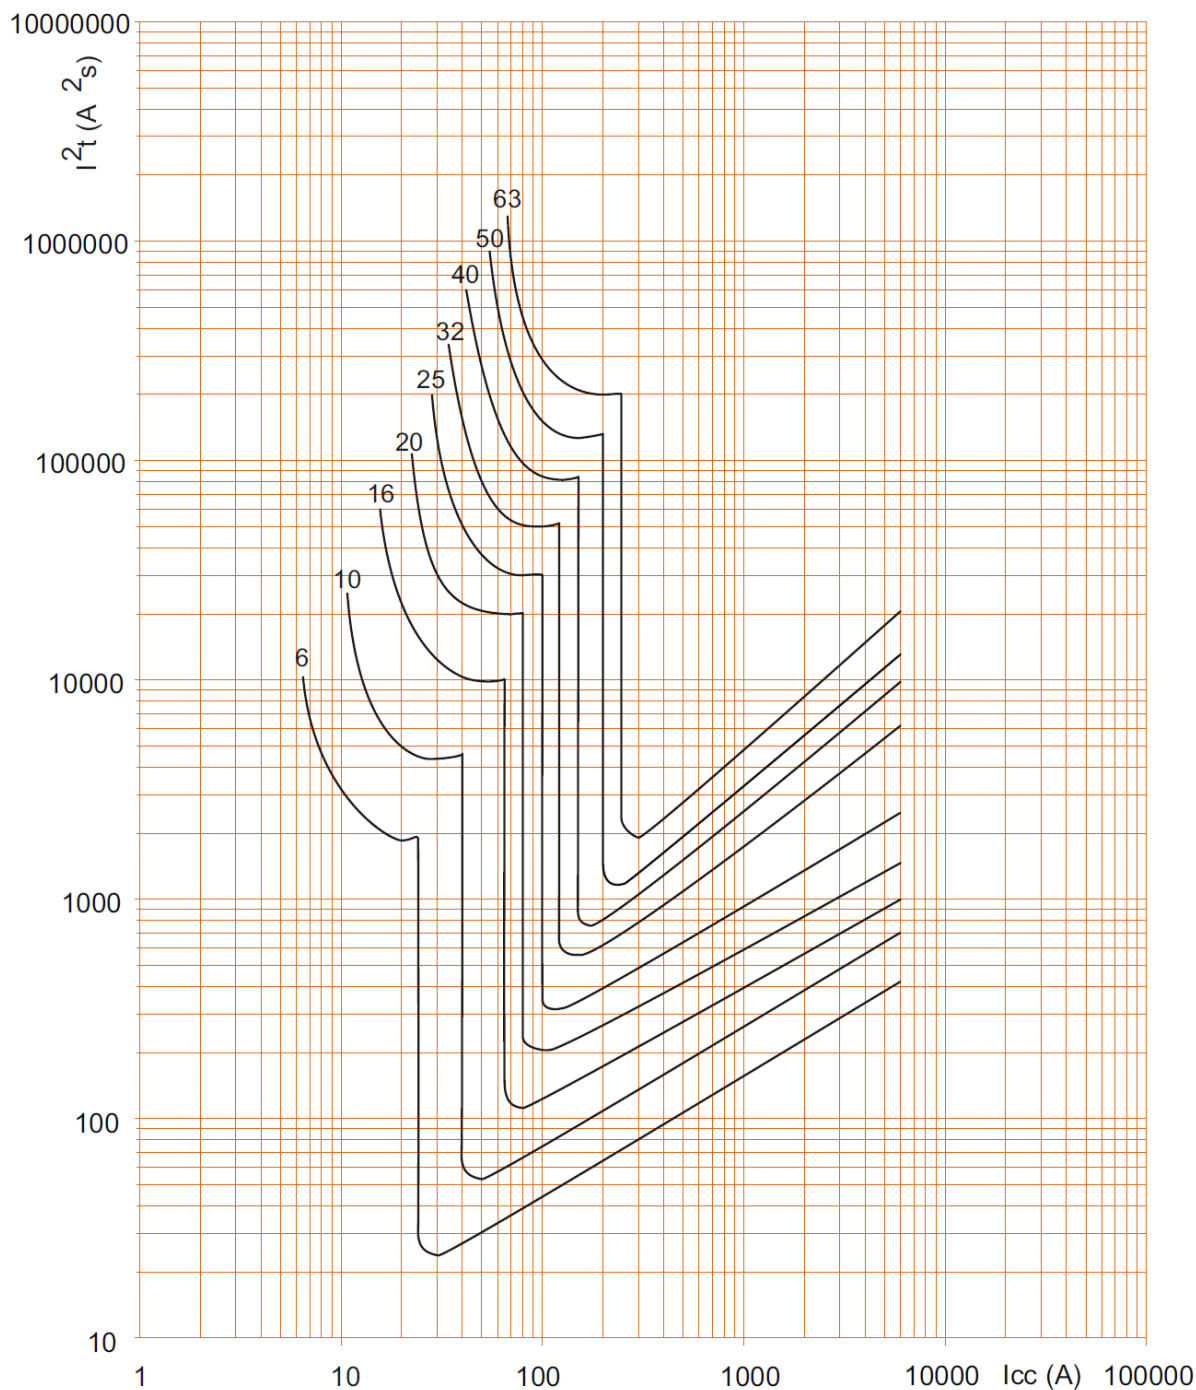

. I_{cc} = Square value of symmetric component of the short circuit current (kA).

. I^2t = Thermal energy limited (A²s).


Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6
/ C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

7. CHARACTERISTIC CURVES (continued)

. Limiting thermal energy curve of circuit breakers B curve, 3P / 4P (400V~ / 50Hz):

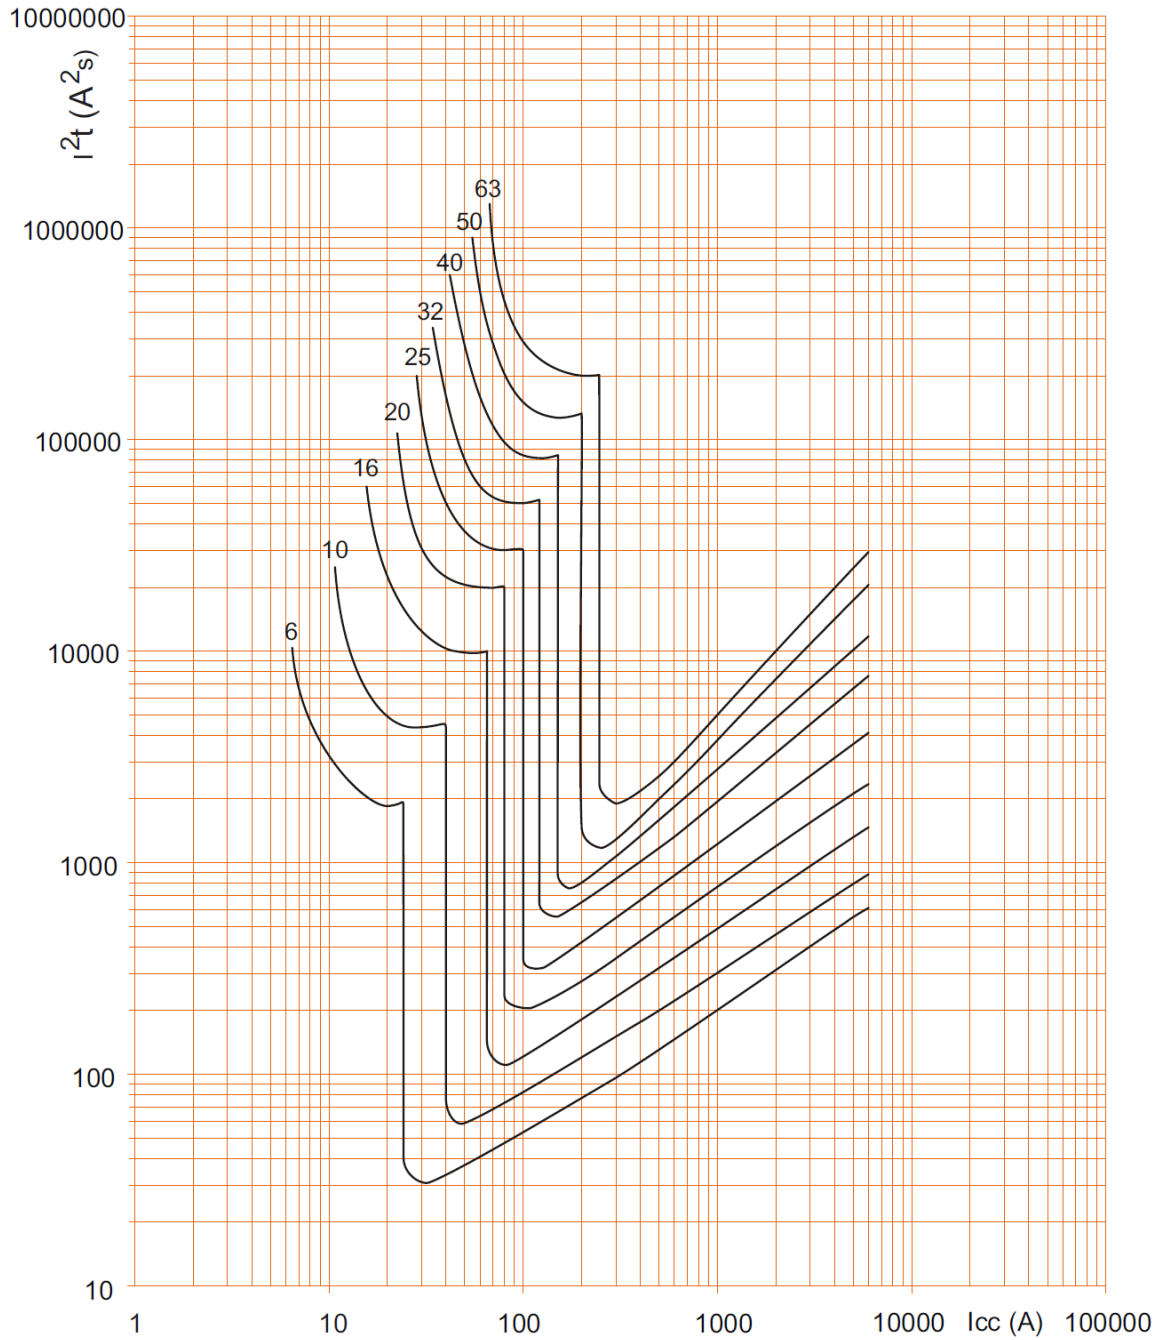

. Icc = Square value of symmetric component of the short circuit current (kA).

. I²t = Thermal energy limited (A²s).


Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6
/ C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

7. CHARACTERISTIC CURVES (continued)

Operating characteristic of circuit breakers C curve:

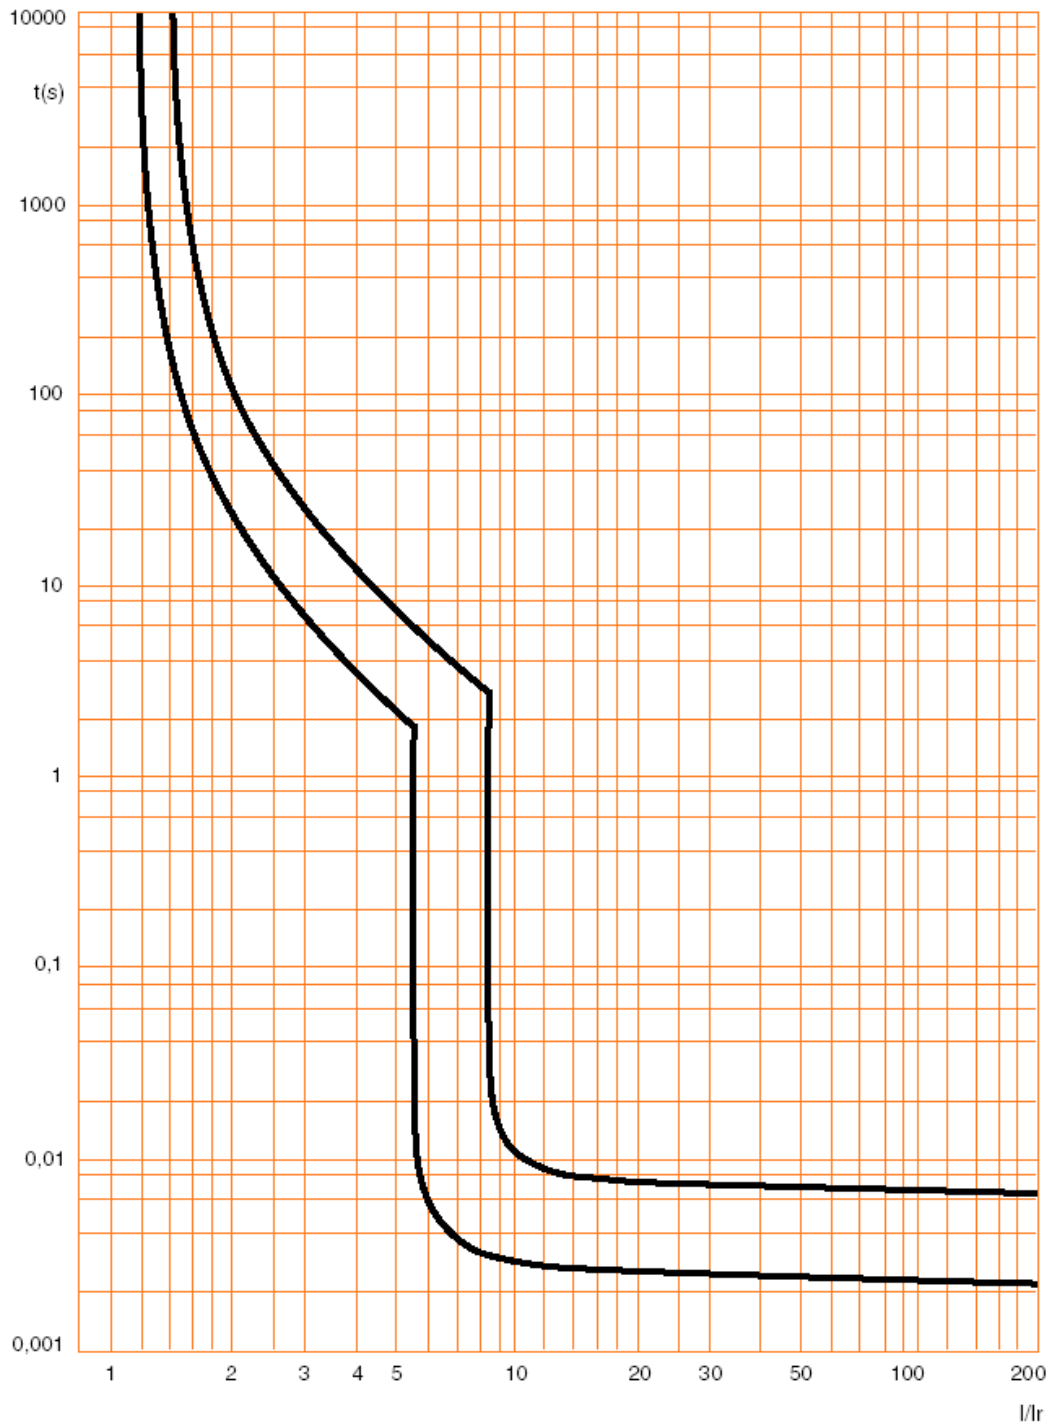


Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6
/ C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

7. CHARACTERISTIC CURVES (continued)

. Limiting thermal energy curve of circuit breakers C curve, 2P (230V~ / 50Hz):

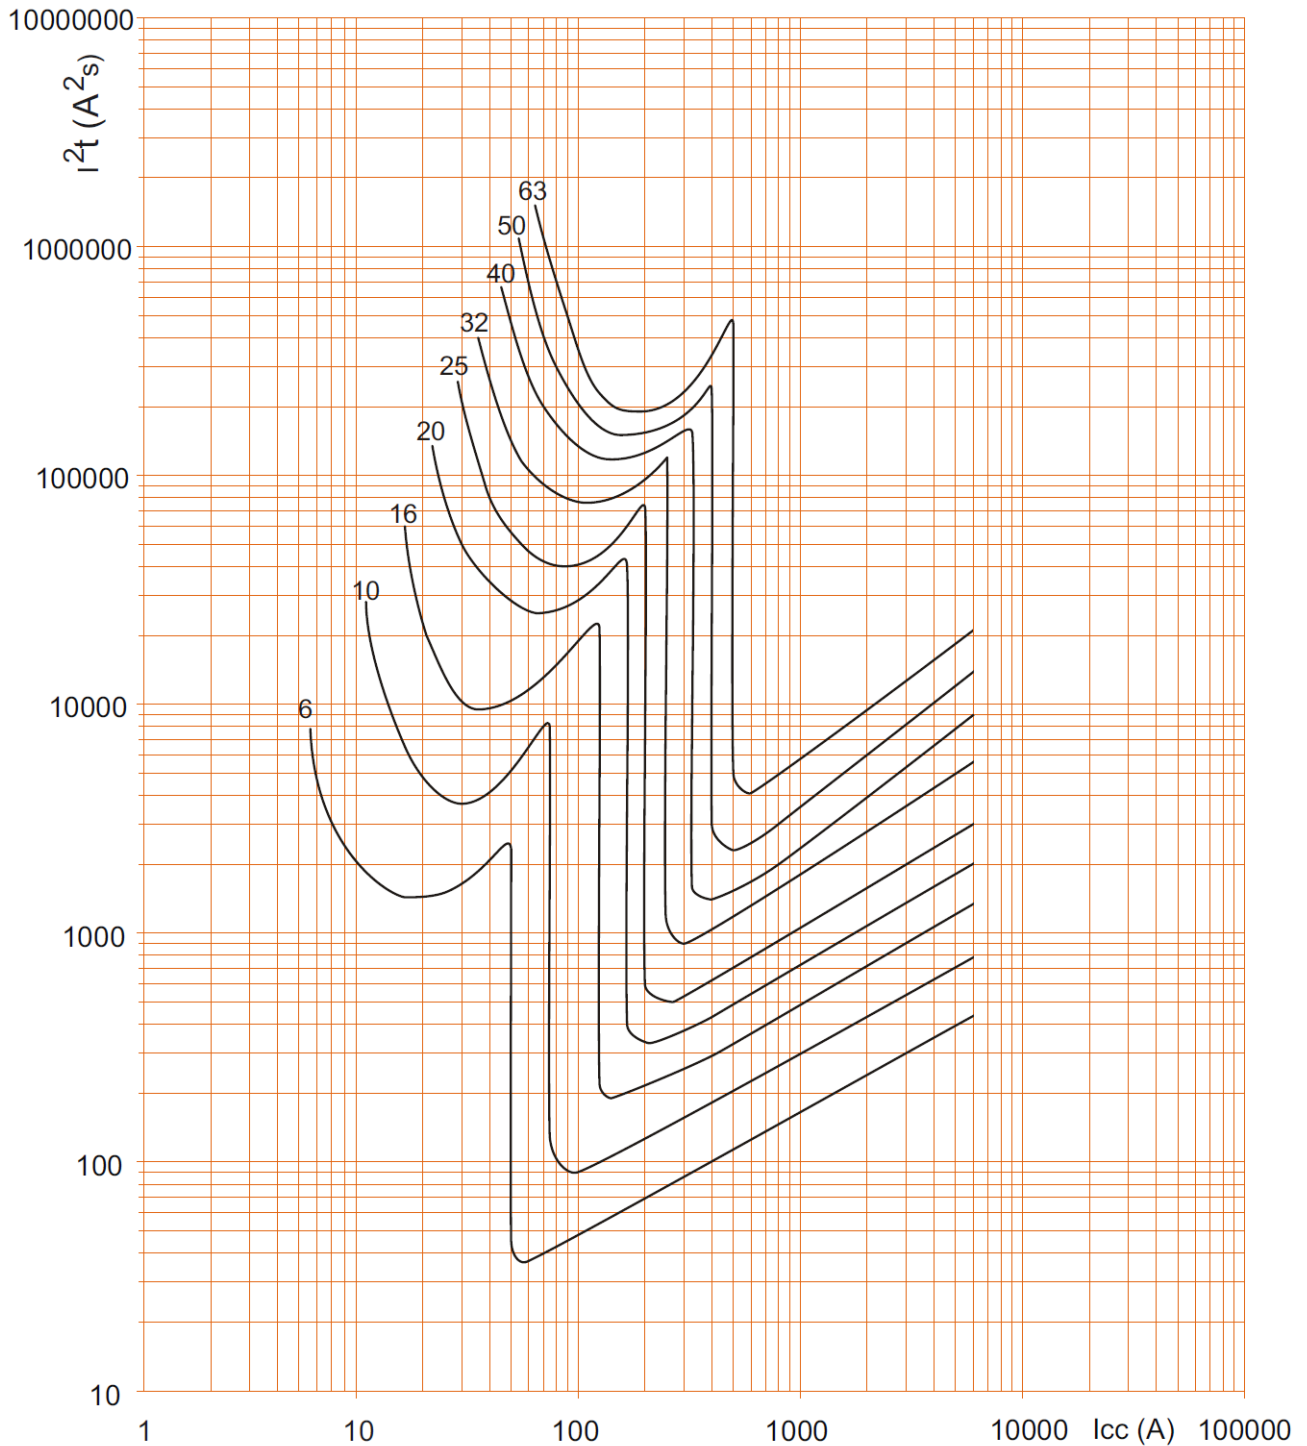

. Icc = Square value of symmetric component of the short circuit current (kA).

. I²t = Thermal energy limited (A²s)


Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6
/ C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

7. CHARACTERISTIC CURVES (continued)

. Limiting thermal energy curve of circuit breakers C curve, 2P (400V~ / 50Hz):

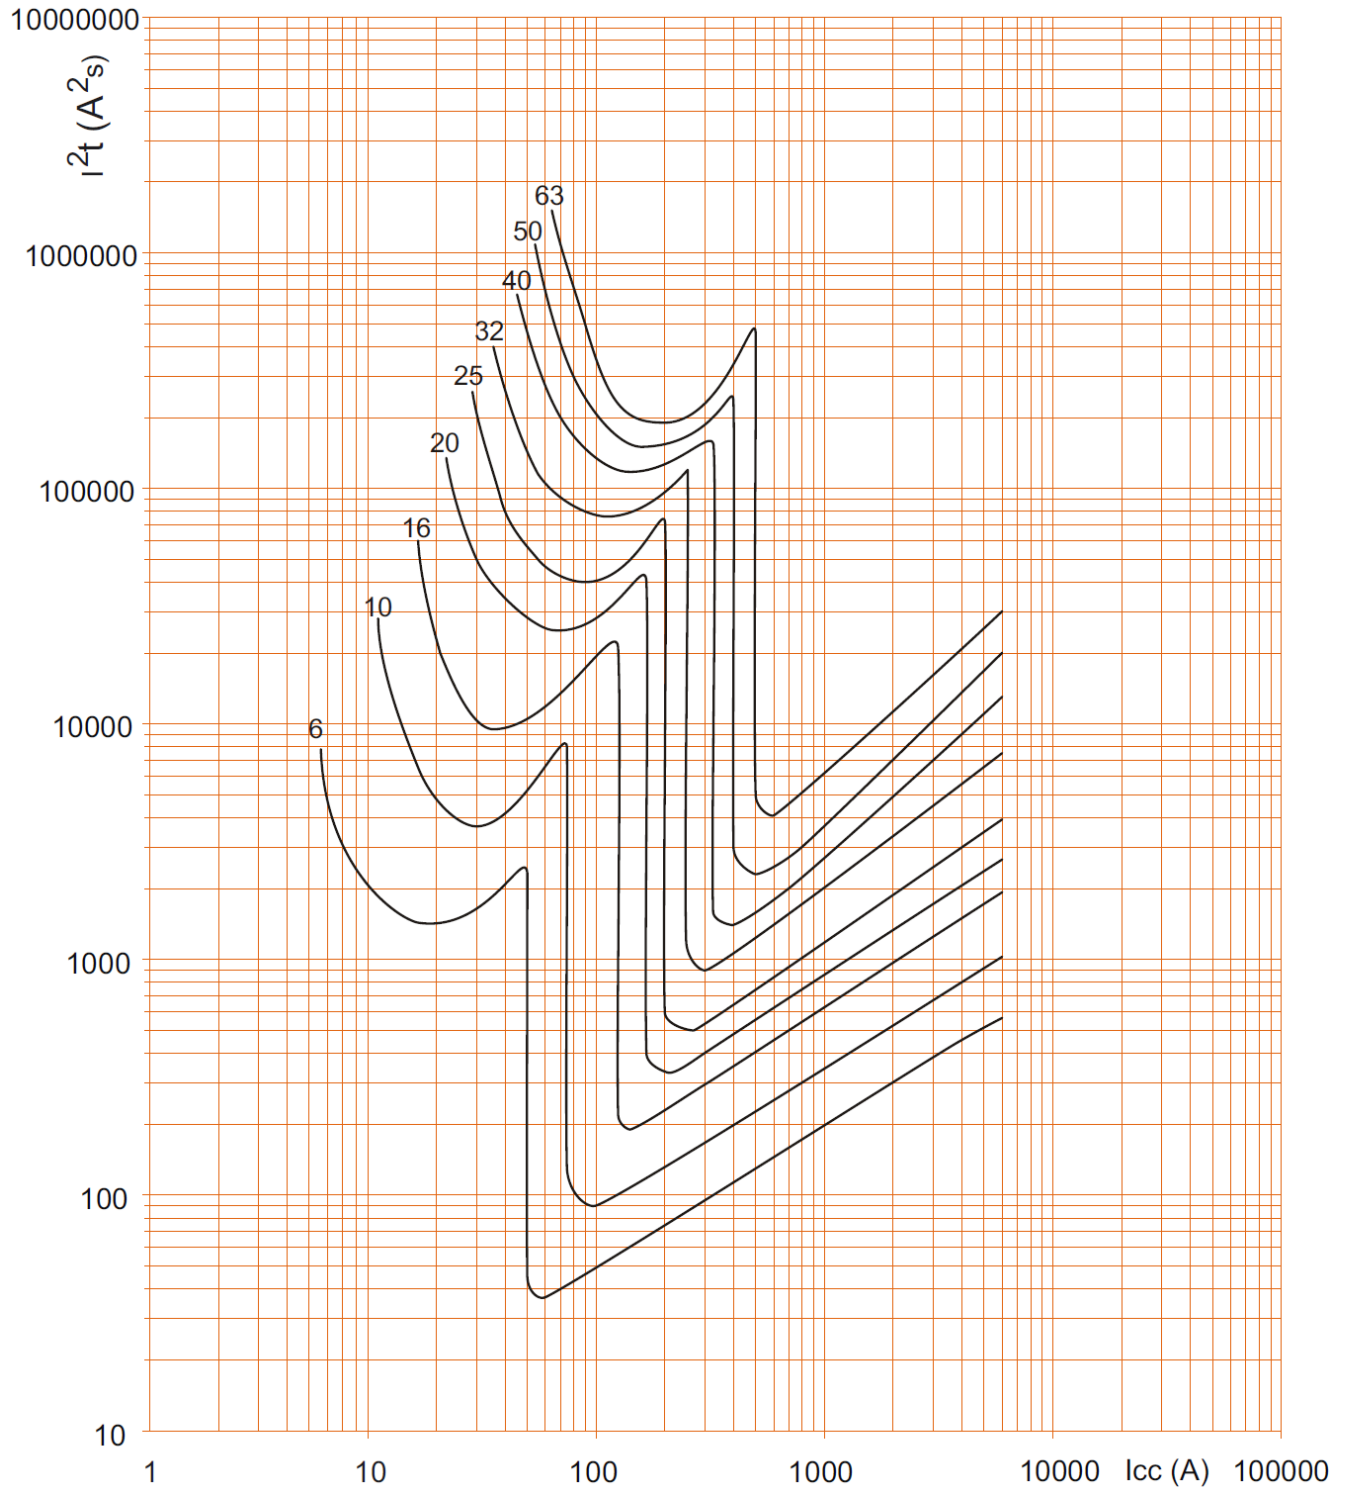

. Icc = Square value of symmetric component of the short circuit current (kA).

. I²t = Thermal energy limited (A²s).


Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6
/ C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

7. CHARACTERISTIC CURVES (continued)

. Limiting thermal energy curve of circuit breakers C curve, 1P / 3P / 4P (400V~ / 50Hz):

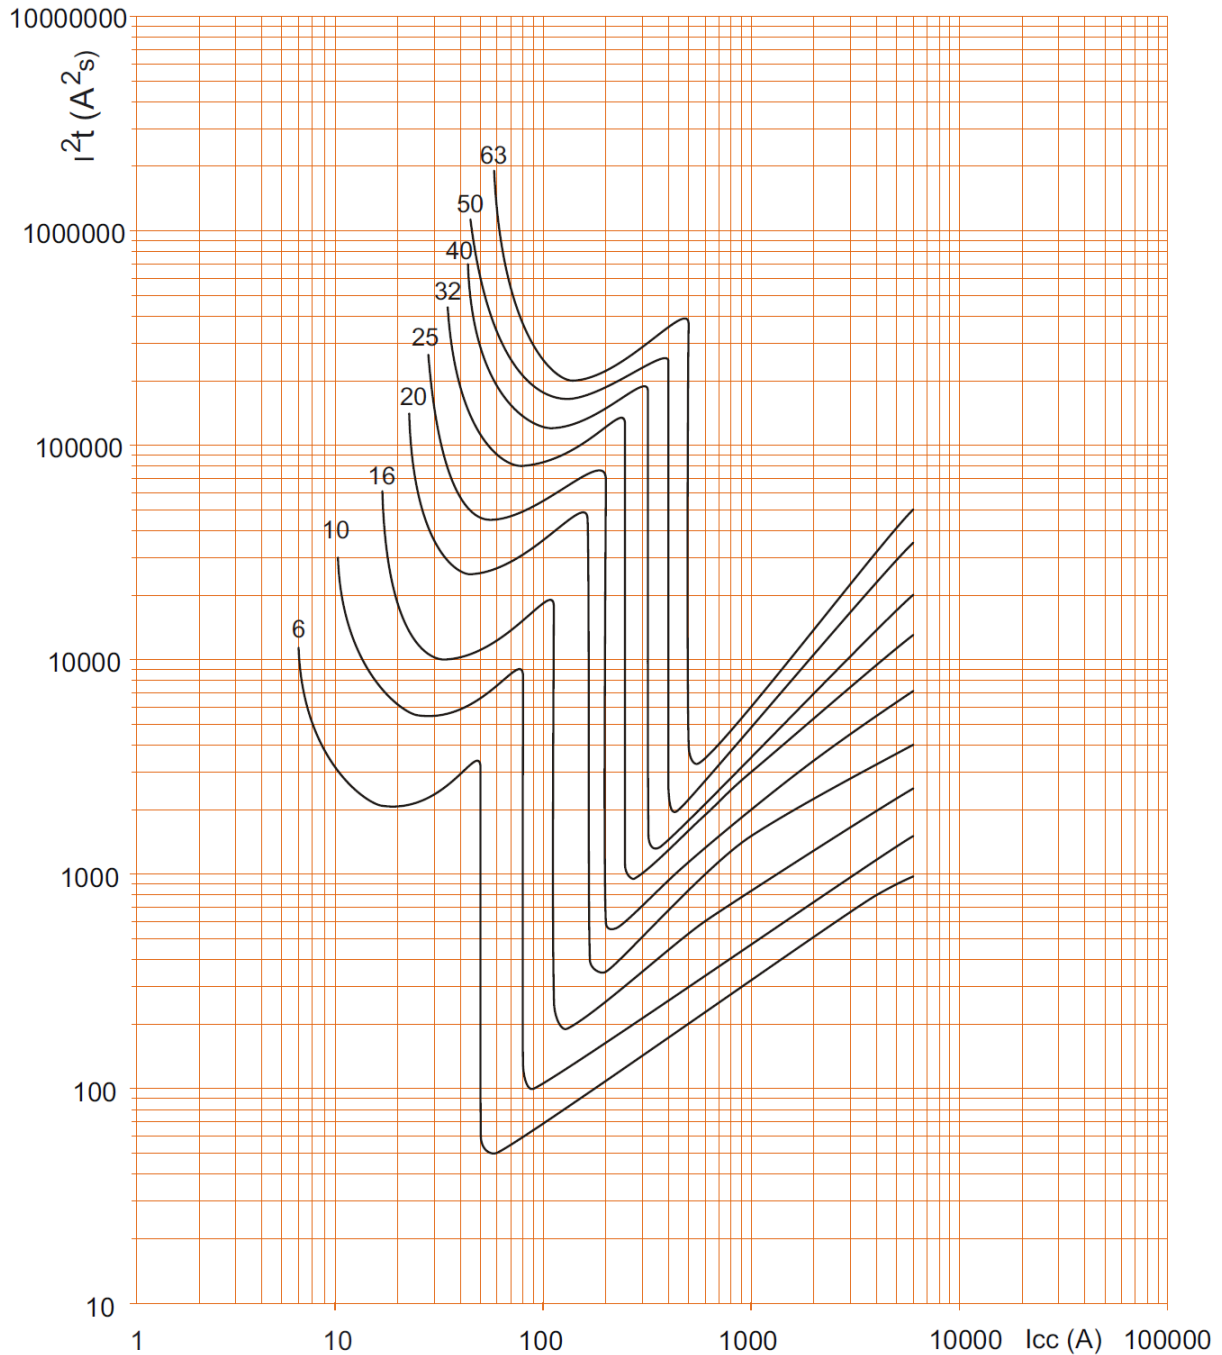

. Icc = Square value of symmetric component of the short circuit current (kA).

. I²t = Thermal energy limited (A²s).


Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63, FN83C6
/ C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63, FN84D6 / D63

7. CHARACTERISTIC CURVES (continued)

Operating characteristic of circuit breakers D curve:

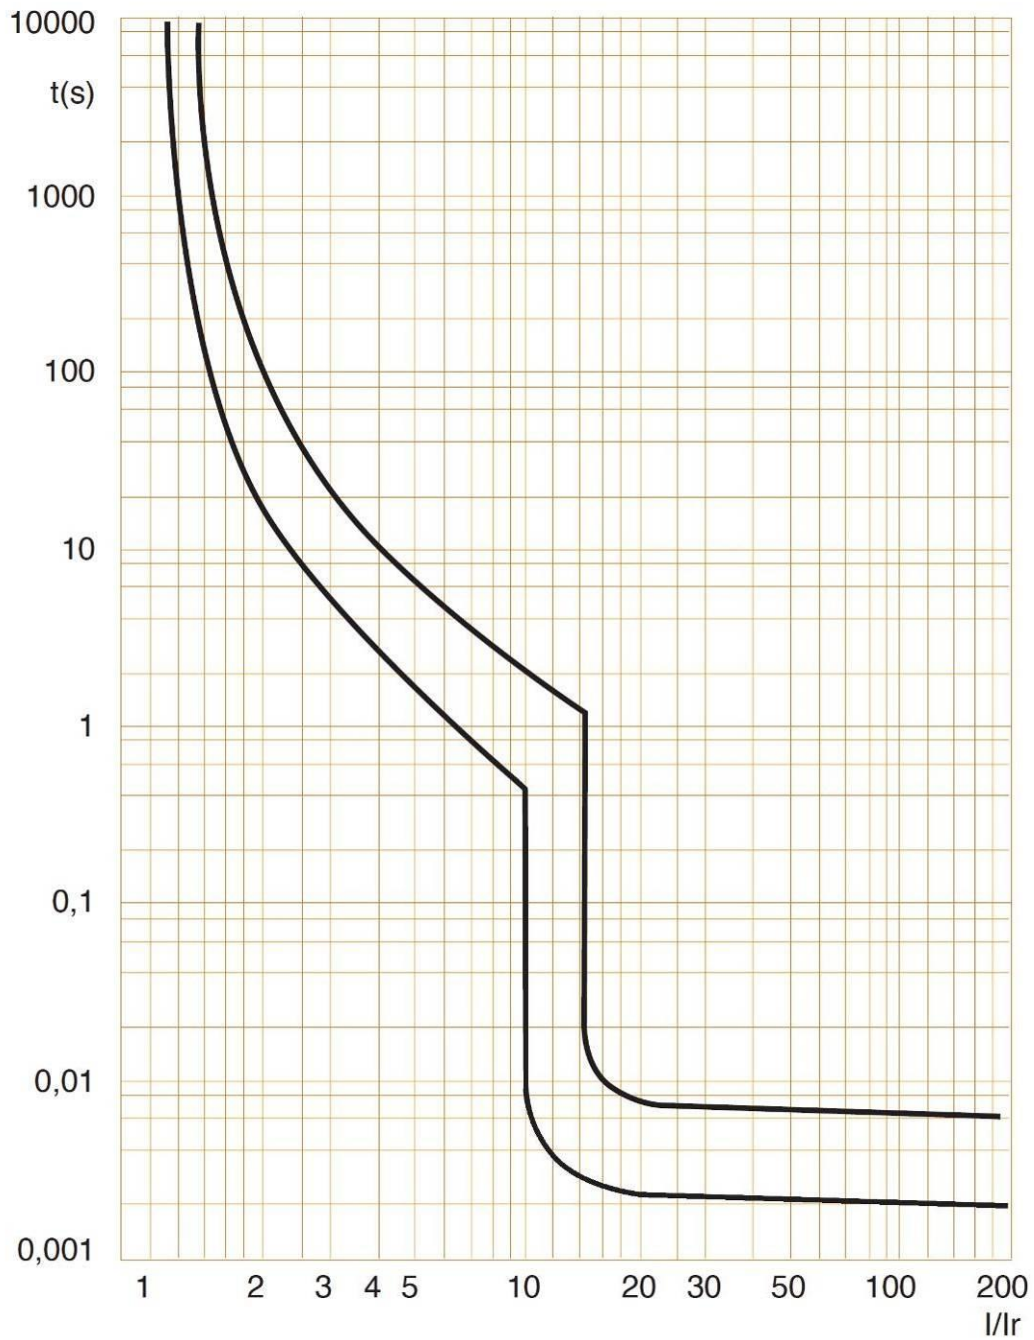


Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63,
FN83C6 / C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63,
FN84D6 / D63

7. CHARACTERISTIC CURVES (continued)

. . Limiting thermal energy curve of circuit breakers D curve, 2P (230V~ / 50Hz):

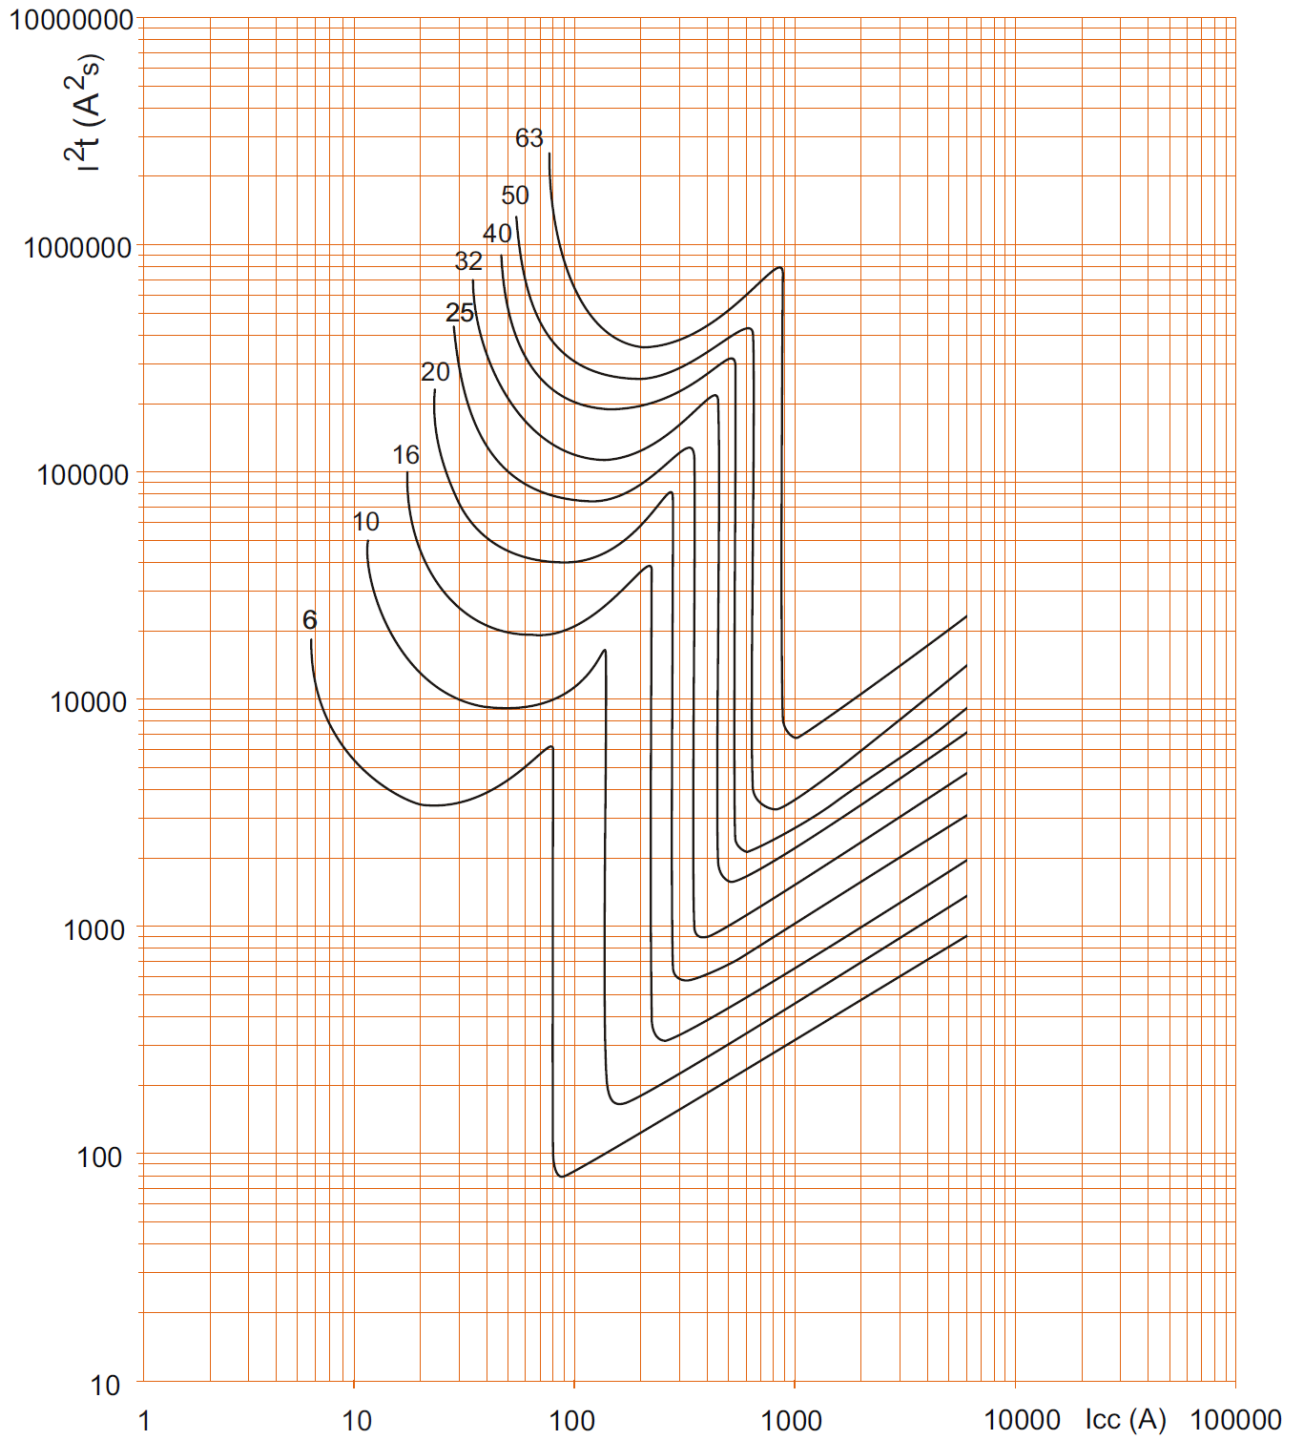

. Icc = Square value of symmetric component of the short circuit current (kA).
. I²t = Thermal energy limited (A²s).


Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63,
FN83C6 / C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63,
FN84D6 / D63

7. CHARACTERISTIC CURVES (continued)

. Limiting thermal energy curve of circuit breakers D curve, 2P (400V~ / 50Hz):

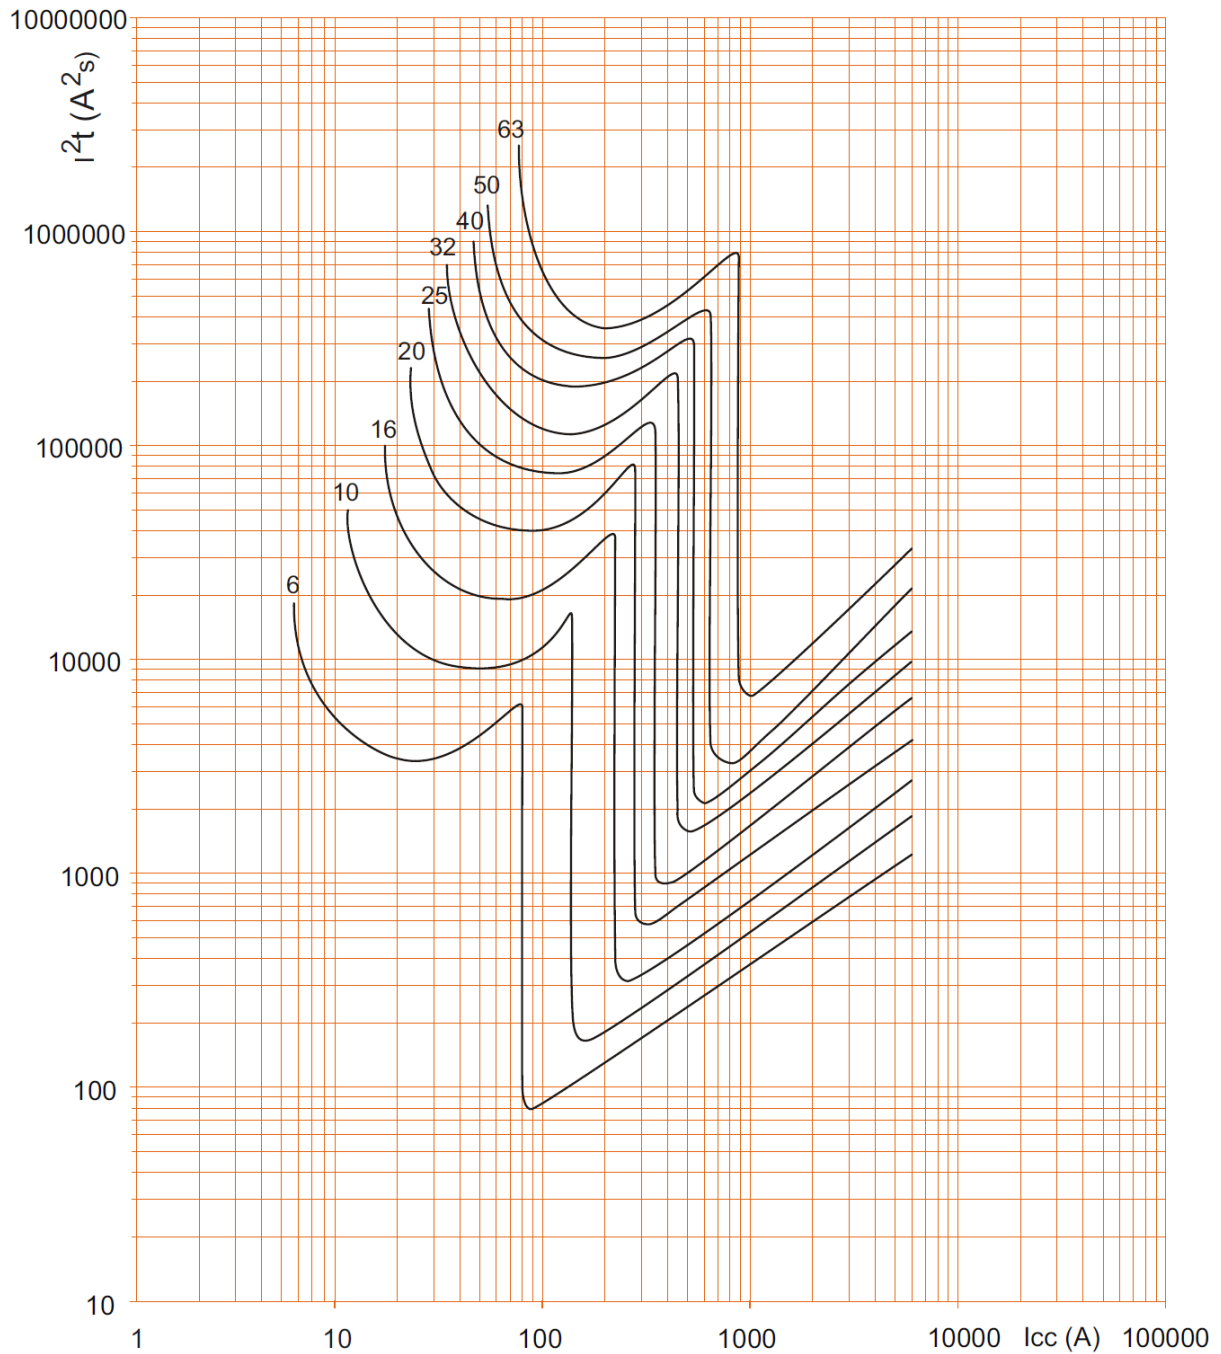

. Icc = Square value of symmetric component of the short circuit current (kA).
. I²t = Thermal energy limited (A²s)


Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63,
FN83C6 / C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63,
FN84D6 / D63

7. CHARACTERISTIC CURVES (continued)

. Limiting thermal energy curve of circuit breakers D curve, 1P / 3P / 4P (400V~ / 50Hz):

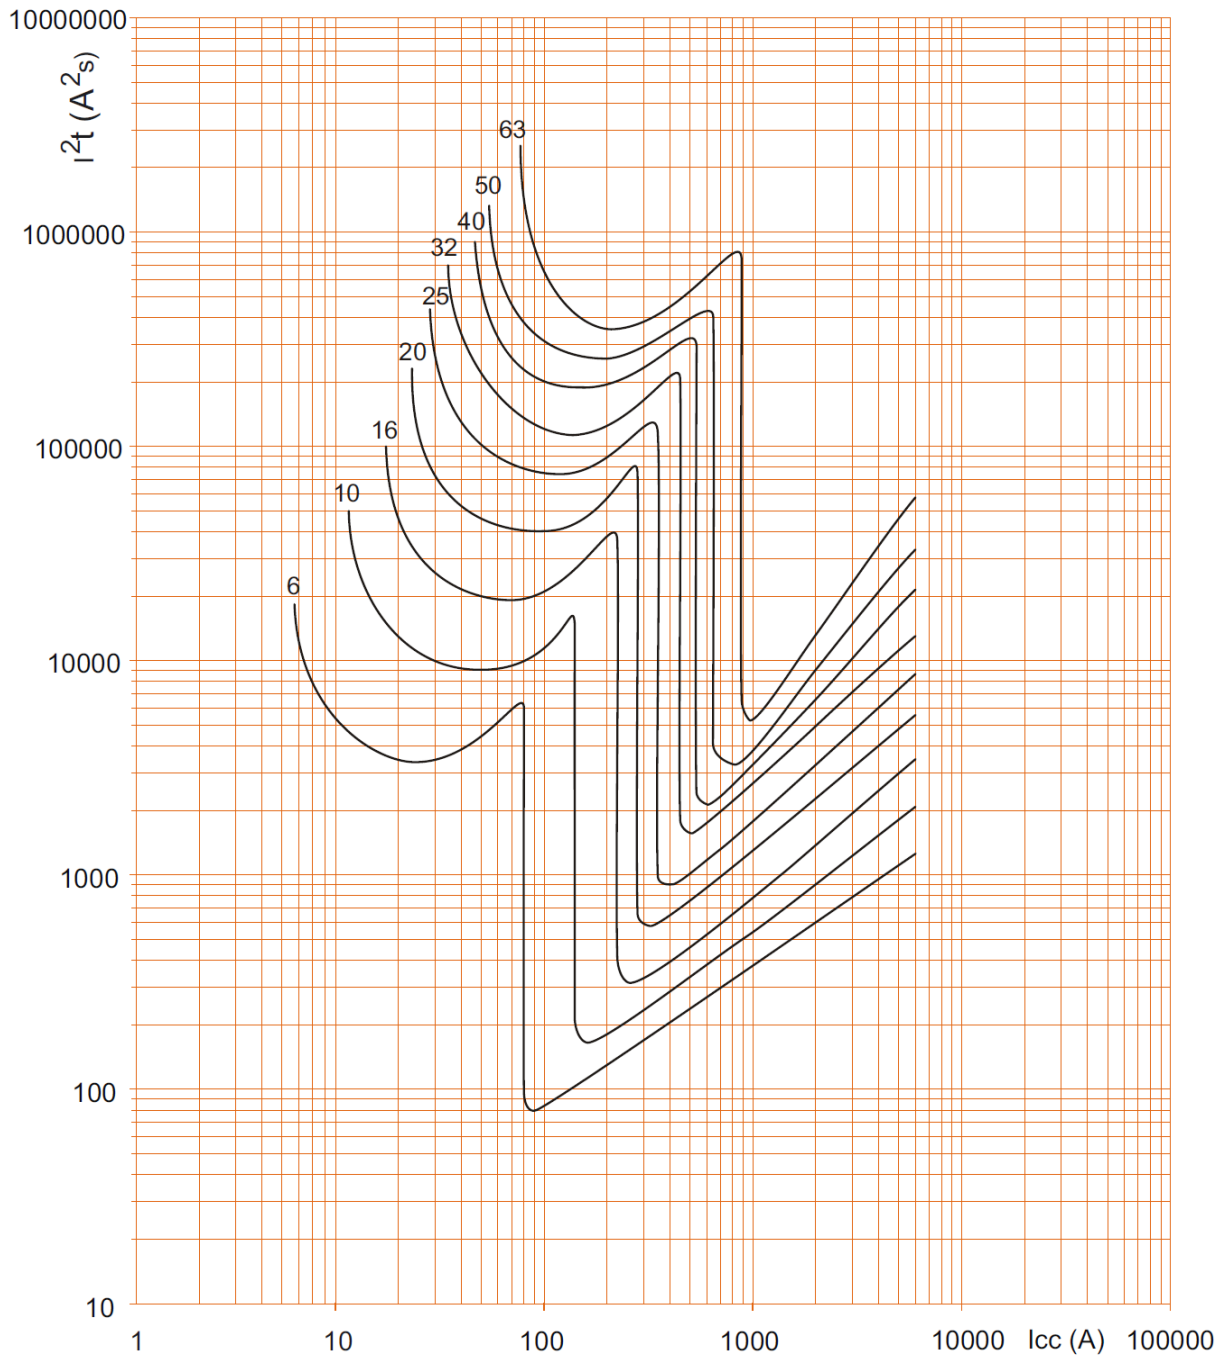

. I_{cc} = Square value of symmetric component of the short circuit current (kA).
. I^2t = Thermal energy limited (A^2s).

Circuit breaker Btdin 60 up to 63A (1 module per pole)

Cat. N° (s)

FN81B6 / B32, FN81C05 / C63, FN81D6 / D63, FN81NC05 / C63,
FN82B6 / B63, FN82C05 / C63, FN82D6 / D63, FN83B6 / B63,
FN83C6 / C63, FN83D6 / D63, FN84B6 / B63, FN84C6 / C63,
FN84D6 / D63

8. AUXILIARIES AND ACCESSORIES

Coupling with RCD add-on modules up to 63A:

m.c.b.	r.c.d.		
	2P	3P	4P
2P	X	-	-
3P	-	X	-
4P	-	-	X

Wiring accessories:

- . Sealable screw cover (cat n° F80CV).
- . Insulating shields (cat n° F80S)
- . Terminal for aluminium cable (10 mm² to 50 mm²) necessary use (cat n° F80ALU63).

Signal auxiliaries:

- . Auxiliary contact (½ module – cat. n° F80CA05, 1 module cat. n° F80CA).
- . Fault signalling changeover switch (½ module – cat. n° F80CR05).
- . Auxiliary contact modifiable in default signal (½ module – cat. n° F80RC05, 1 module cat. n° F80RC).
- . Auxiliary contact + fault signalling switch - can be modified into 2 auxiliary contacts (1 module - cat. n° F8CR).

Control auxiliaries:

- . Shunt releases (1 module - cat. n° . F80ST1 / ST2).
- . Under voltage release (1 module - cat. n° F80SV1 / SV2).
- . Overvoltage release (1 module – cat. n° F80SVP).
- . Autonomous shunt trip for NC push-button (1 module - cat. n° F80SVE1 / SVE2).

Motor driven control modules

- . Motor driven control 24-48V / 230V (1 module – cat n° F80MC24, F80MC230)
- . Motor driven control module with automatic resetting integrated (2 modules – cat n° F80MR24, F80MR230)

Automatic resetting:

- . Automatic resetting STOP & Go (cat. No. F80SG, F80SGB, F80SGPN).

Possible combinations of m.c.b and auxiliaries:

- . Auxiliaries are clipped on the left of the m.c.b.
- . Maximum number of auxiliaries for one circuit-breaker: 3.
- . Two signalling auxiliaries max. (cat. n° F80CA05 / CA / CR05 / CR / RC05 / RC).
- . Only one control auxiliary (cat. n° F80ST1 / ST2 / SV1 / SV2 / SVP / SVE1 / SVE2).
- . One remote control or Stop & Go motor driven remote control
- . If signalling and control auxiliaries are associated on the same circuit breaker, the command auxiliary must be placed to the left of the signal auxiliary

8. AUXILIARIES AND ACCESSORIES (continued)

Front external rotary handle

- . Black handle (cat. No. F80KMN)
- . Yellow and red handle (cat. No. F80KMR)

Sealing:

- . Possible in "Open" position (OFF) or "Close" position (ON).

Locking:

- . By 5 mm padlock or 6 mm padlock with padlock support (cat. N° F80BL).

9. USE IN DIRECT CURRENT

Operation in DC (direct current):

- . Refer to the IDP001518

