

Linea 5000 - Additional keypad module

345500 - 345510

Description

Keypad module with aluminium key finish for door lock opening in 2-wire systems where there is at least one Linea 5000 display module (345000). The keypad module is fitted with relay contacts (C – NO – NC) and clamps (CP - P1) for the connection of a local door release pushbutton and can be programmed using the Home + Project app. It has a programming reset pushbutton, LEDs for the visual notification of the access status and night backlighting. The device, to be completed with an appropriate frame, can be used stand-alone or combined with a display module in a 3+1 composition. To be installed in 1-module flush mounted box 350010, in wall mounted box 345311 or with dedicated accessory 345341 for 3+1 composition.

345500 Additional keypad module with Aluminium finish.

345510 Additional keypad module with Nickel finish.

Related items

345201 Linea 5000 - Cover plate accessory module aluminium

345202 Linea 5000 - Cover plate accessory module nickel

345203 Linea 5000 - Cover plate accessory module gold

345204 Linea 5000 - Cover plate accessory module titanium


345205 Linea 5000 - Cover plate accessory module steel

Technical data

| | |
|-----------------------------------|--|
| Power supply from Bus: | 18 - 27 Vdc |
| Stand by absorption with LEDs on: | 15 mA |
| Max. operating absorption: | 27 mA |
| Operating temperature: | (- 25) – (+ 70) °C |
| Bluetooth: | Frequency range: 2402 - 2480 MHz Power level < 10 dBm |
| Local relay contact output: | 100VA, max 24Vac/dc |


Warning: in case of a power failure, the device does not work and cannot be reached, any collection of personal data is interrupted.

Dimensional data

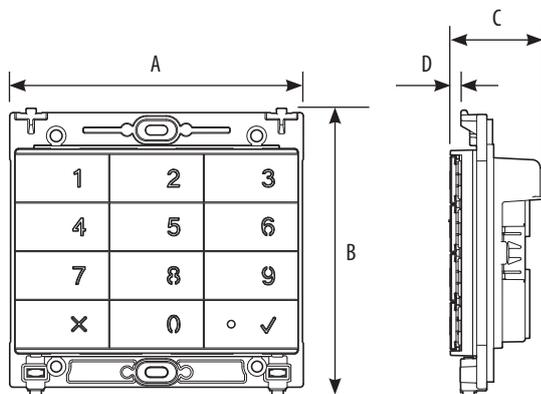


| A | B | C | D |
|--------|--------|-------|--------|
| 129 mm | 127 mm | 41 mm | 4.5 mm |

Front view

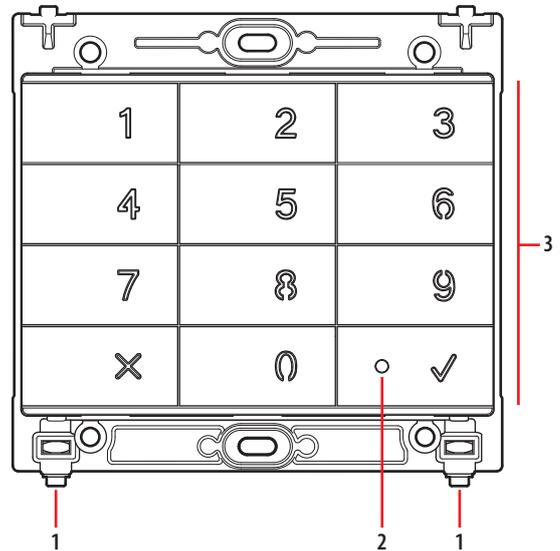

Rear view

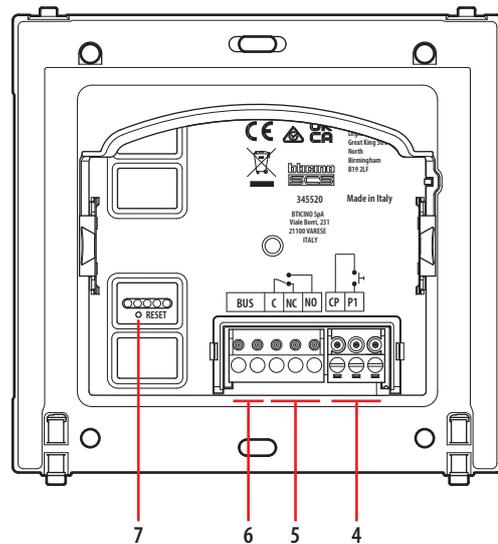

Legend

1. Locking screws for finishing frame
2. Opening confirmation LED with numeric code
 - Green: correct code
 - Red: wrong code
3. Backlit keys for entering the codes
4. Clamp for door lock pushbutton
5. Clamp for local relay contacts (C/NC/NO)
6. BUS clamp
7. Special functions pushbutton:
 - reset to the factory settings: keep pressed for 10" until the red LED starts flashing;
 - Bluetooth activation: press briefly, the LED flashes green then it goes off.

Configuration

For device configuration and installation and for any other information, refer to the App or documentation that can be downloaded from the website:



www.homesystems-legrandgroup.com

Download App



Home + Security



Home + Project

ANDROID: requires Android 5.0 or later with access to Google Play



iOS: requires an iPhone with iOS 12,0 or later

