



LF-GSD150YV024A
DALI-2 0.1% Dimming Depth Flicker-free LED Driver

Product Description

LF-GSD150YV024A is a 150W constant voltage tunable white LED driver supporting DALI or PUSH dimming. Its input voltage ranges from 220 to 240Vac; rated output voltage: 24V; rated current: 6.25A. It features high efficiency, low THD and flicker-free effect. It is suitable for indoor LED strips.

Features


- IP20
- Suitable for Class II light fixtures
- Built-in active PFC function
- Supports DALI DT8 dimming + PUSH dimming, dimming depth <0.1%
- Flicker free
- Small size; high efficiency (typical value $\geq 92\%$)
- All-round protections: over voltage protection, over load protection, short circuit protection
- 5-year warranty (please refer to the warranty condition.)



Applications

- LED strip
- Luminous character
- Light box

Naming

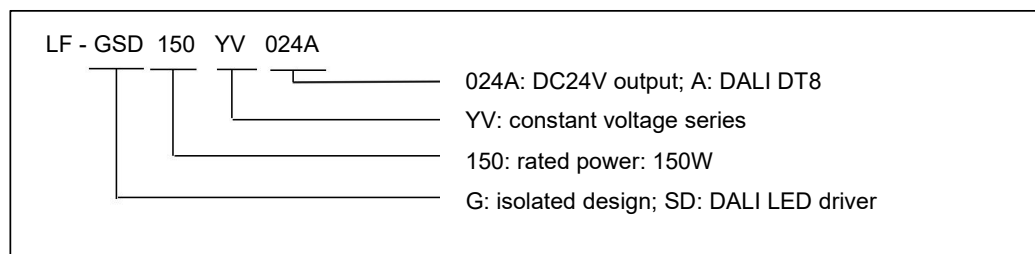



LF-GSD150YV024A
DALI-2 0.1% Dimming Depth Flicker-free LED Driver

Electrical Characteristics

Model		LF-GSD150YV024A				
Output	Output Voltage	24Vdc				
	Output Current	0-6.25A				
	Output Power	150W max. @220-240Vac				
	Flicker Index	IEC-Pst ≤1, CIE SVM ≤0.9, Modulation Depth ≤1% Complies with flicker-free standard (IEEE Std 1789-2015)				
	Ripple Current	240mV max.				
	Voltage Tolerance	±2%				
	Temperature Drift	±5%				
	Start-up Time	<1S@230Vac				
Input	Input Voltage	220-240Vac (voltage limit: 198-264Vac)				
	DC Input Voltage	282-340Vdc (voltage limit: 255-373Vdc)				
	Input Frequency	47Hz-63Hz				
	Input Current	1A max.				
	Power Factor	≥0.95@230Vac (full load)				
	THD	≤10%@230Vac				
	Efficiency	≥93%(230Vac full load)				
	Inrush Current	≤73A&230uS@230Vac				
	Load Quantity Carried by the Circuit Breaker	Circuit Breaker Model	B10	C10	B16	C16
		Quantity (pcs)	5	6	9	10
	Leakage Current	≤0.7mA				
	Standby Power Consumption	≤1W@230Vac				
Protection Characteristics	Open Circuit	<33.6V				
	Over Temperature	No output (auto-recovery)				
	Short Circuit	Hiccup mode (auto-recovery)				
Environment Descriptions	Operating Temperature	-20°C - +50°C				
	Operating Humidity	20-90%RH (no condensation)				
	Storage Temperature/ Humidity	-40°C- 80°C (six months under class I environment); 10-90%RH (no condensation)				
	Atmospheric Pressure	86kPa~106kPa				



LF-GSD150YV024A
DALI-2 0.1% Dimming Depth Flicker-free LED Driver


Safety and Electromagnetic Compatibility	Certifications	TUV-ENEC, CE, CB, RCM, SAA, CCC
	Withstanding Voltage	I/P-O/P: 3.75kV 5mA 60S
	Insulation Resistance	I/P-O/P: >100MΩ@500Vdc
	Safety Standards	ENEC: EN61347-1: 2015, EN 61347-2-13: 2014/A1: 2017, EN 62384: 2016/A1: 2009 CE-LVD: EN 61347-2-13: 2014/A1: 2017, EN 61347-1: 2015, EN 62493: 2015 CB: IEC 61347-1: 2015, IE61347-2-3: 2014, IEC 61347-2-13: 2014/AMD1: 2016 RCM: AS 61347.2-13: 2018 SAA: AS 61347.2-13: 2018 CCC: GB19510.1-2009, GB19510.14-2009
	EMI	CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3 CCC: GB/T17743, GB17625.1, GB17625.2
	EMS	CE-EMC/RCM: EN61000-4-2, 3, 4, 5, 6, 11 CCC: GB/T17626.2, 3, 4, 5, 6, 11
Others	IP Rating	IP20
	RoHS	RoHS 2.0 (EU) 2015/863
	Warranty Condition	5 yrs (Tc≤79°C)
	DALI Standard	IEC 62386-101 102 207 209: DALI 2.0
Remarks	1. It is recommended that customer should install over voltage and under voltage protection devices and surge protection devices in the power supply circuits of the light fixtures to ensure safety before connecting to electricity. 2. The PC cover, casing, end caps and other parts of the LED driver inside the LED light fixture must conform to UL94-V0 flammability standard or above. 3. As an accessory, the LED driver is not the only factor determining the EMC performance of the LED light fixture. The structure and the wiring of the light fixture are also relevant. Thus it's strongly recommended the LED light fixture manufacturer should re-confirm the EMC of the whole LED light fixture. 4. Unless otherwise stated, the parameters of PF, THD and efficiency are test results under the conditions of ambient temperature of $25 \pm 5^{\circ}\text{C}$, humidity of 50%, input voltage of 230Vac and full load.	




LF-GSD150YV024A
DALI-2 0.1% Dimming Depth Flicker-free LED Driver

Characteristic Curves


■ PF Curve

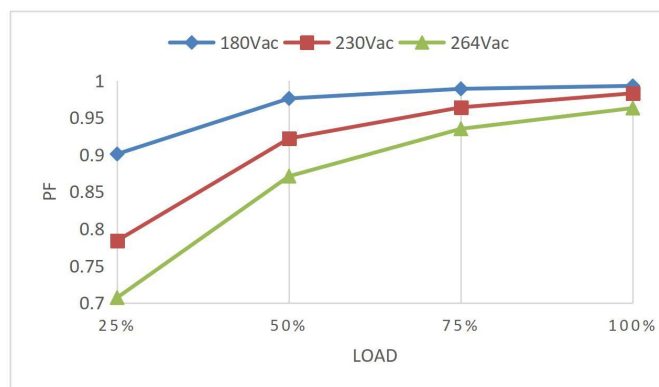

■ Efficiency Curve

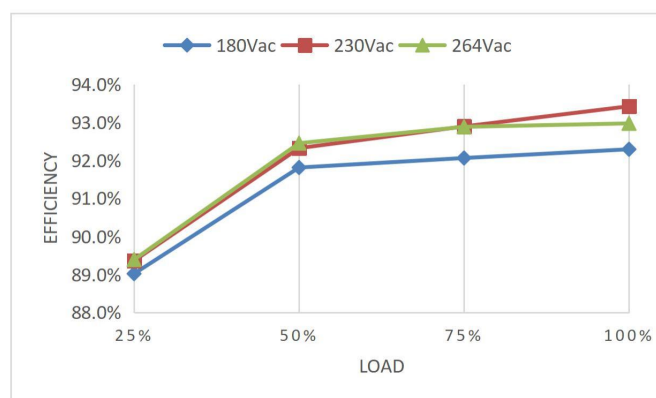

■ Lifetime Curve

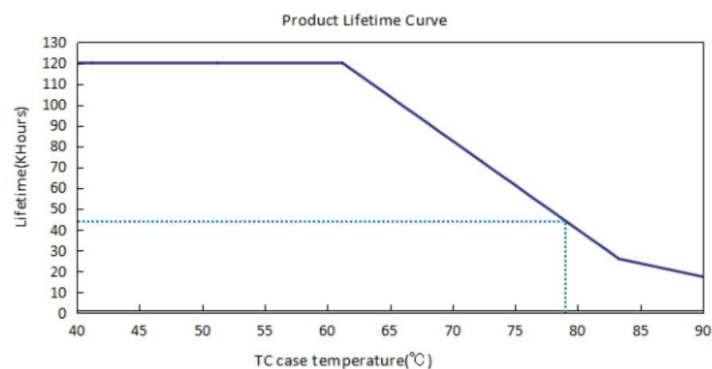




LF-GSD150YV024A
DALI-2 0.1% Dimming Depth Flicker-free LED Driver

Dimming Operation Instructions

■ Definitions of Input & Output

INPUT		OUTPUT	
AC-L	AC live wire input	LED+	Positive electrode output of driver
AC-N	AC neutral wire input	WW-	Negative electrode output of driver's warm light
CCT	CCT change input	CW-	Negative electrode output of driver's cold light
DA/PUSH	DALI/PUSH dimming input		
DA/PUSH	DALI/PUSH dimming input		

■ Wiring Diagram of CCT Change in PUSH Dimming Mode

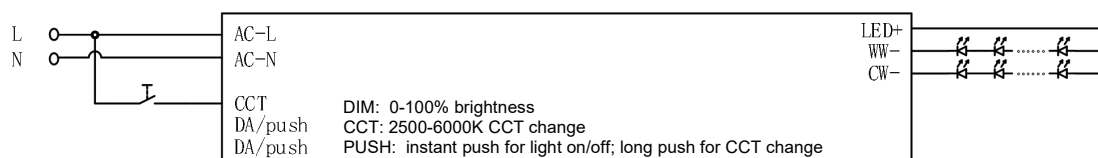

⚠ Remark: when using the PUSH dimmer for brightness change or CCT change, please connect AC-L and AC-N FIRST, and then connect the PUSH dimmer to AC-L and CCT terminal.

■ Operation Instructions of CCT Change in PUSH Dimming Mode

Operation	Operation Time	Function
Instant Push	0.1-0.5 sec	LED Light on / off
Long Push	0.6-5 sec	Dim up / down
Reset Push	>9 sec	Reset to 50% warm light & 50% cold light two-channel output


The PUSH operation won't cause any variations if it's less than 0.1 sec.

- Minimum CCT of PUSH dimming: warm light; maximum one: cold light
- When entering to the PUSH dimming mode for the first time, it's default to be 50% warm light & 50% cold light two-channel output.
- For the first long press on the PUSH button, the brightness remains the same but the CCT turns to the cold light.
- For the press on the PUSH button again, the dimming is opposite to the last one.



LF-GSD150YV024A
DALI-2 0.1% Dimming Depth Flicker-free LED Driver

■ Wiring Diagram of Brightness Change in PUSH Dimming Mode

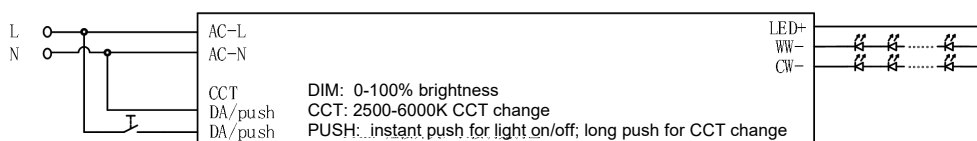

⚠ Remark: when using the PUSH dimmer for brightness change or CCT change, please connect AC-L and AC-N FIRST, and then connect the PUSH dimmer to AC-L and CCT terminal.

■ Operation Instructions of Brightness Change in PUSH Dimming Mode

Operation	Operation Time	Function
Instant Push	0.1-0.5 sec	LED Light on / off
Long Push	0.6-5 sec	Dim up / down
Reset Push	>9 sec	Reset to 50% brightness


The PUSH operation won't cause any variations if it's less than 0.1 sec.

- Minimum dimming depth of PUSH dimming: 1% (lout)
- When entering to the PUSH dimming mode for the first time, it's default to be 100% brightness output.
- For the first long press on the PUSH button, the brightness dims down.
- For the press on the PUSH button again, the dimming is opposite to the last one.

■ DALI Dimming Operations

- Factory default setting: 100% brightness; logarithmic dimming curve
- Connect the DALI signal to the DA/PUSH terminal, no positive or negative designation.
- DALI protocol includes 16 groups and 64 IP addresses.
- Minimum dimming depth of DALI dimming: 0.1% (lout).


■ Wiring Diagram of DALI Dimming Operation

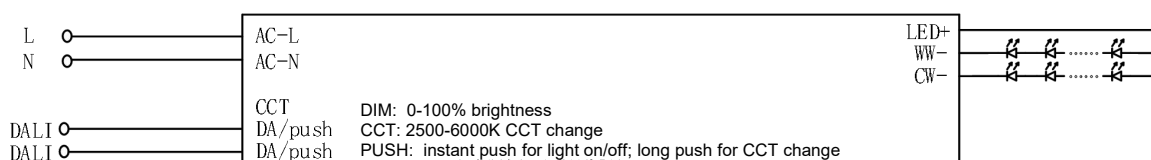



LF-GSD150YV024A
DALI-2 0.1% Dimming Depth Flicker-free LED Driver


■ DALI Logarithmic Dimming Curve

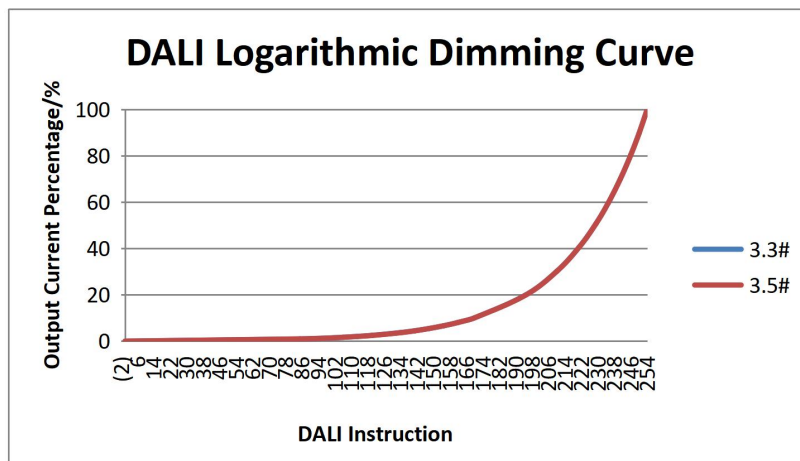

■ Instructions of Switching Dimming Modes

- For the first time being powered on, it's default to be the DALI dimming mode at 100% brightness output
- Switching between the DALI dimming and the PUSH dimming modes:
 - ◆ Switch to the PUSH dimming mode: long press the PUSH button for over 0.6 sec and then it's switched to the PUSH dimming mode. The current output status is the same as the previous one.
 - ◆ Switch to the DALI dimming mode: when receiving any DALI instructions, the driver will switch to the DALI dimming mode. If it's a non-dimming instruction, the output status remains the same. If it's a dimming instruction, the dimming instruction will be executed.


Label

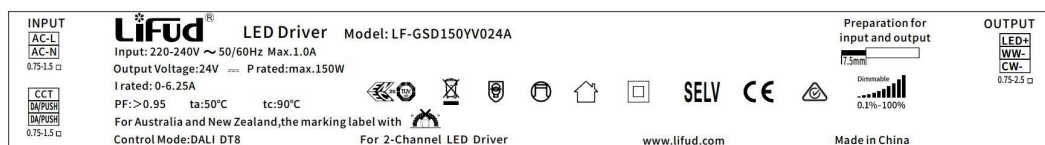



LF-GSD150YV024A
DALI-2 0.1% Dimming Depth Flicker-free LED Driver

Structure & Dimensions (unit: mm)

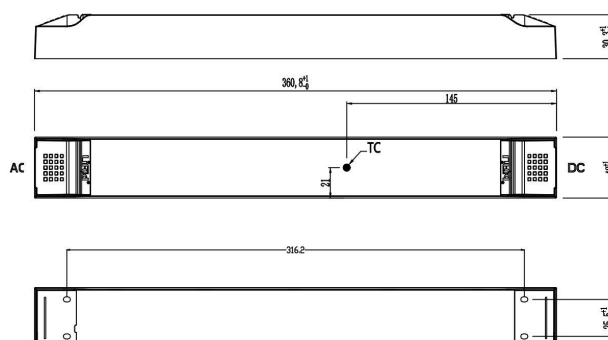

Packaging Specifications

Model	LF-GSD150YV024A
Packaging Box Size	385*285*210 mm (L*W*H)
Quantities	6 pcs/layer; 5 layers/ctn; 30 pcs/ctn
Weights	0.36 kg/pc; 11.8 kg/ctn

Transportation & Storage

■ Transportation

- Suitable transportation means: vehicles, boats and aircraft.
- During transportation, there should be awnings for rain protection and sun protection. Civilized loading and unloading are required. There should be no severe vibration or impact.

■ Storage

- Storage in accordance with the provisions of the Class I environment. For products which have been stored for more than six months, they mustn't be used until they pass the re-inspection.

Attention

- Please use this product according to its specifications otherwise there may be malfunction.
- Use light fixtures that have not been certified or are not compatible with the LED drivers may cause fire or other hazards.
- Man-made damage, any use beyond the specification and non-original-factory modification are not covered by warranty.

Remark: The final interpretation right of the contents of this data sheet belongs to Lifud Technology Co., Ltd.



Informazione agli utenti ex art. 26 D.Lgs. 49/2014

Il simbolo riportato sull'apparecchiatura (Allegato IX D.Lgs. 49/2014) indica che il rifiuto deve essere oggetto di "raccolta separata" e che è stato immesso sul mercato, in Italia, dopo il 31/12/2010. Pertanto, l'utente dovrà conferire (o far conferire) il rifiuto ai centri di raccolta differenziata predisposti dalle amministrazioni locali, oppure consegnarlo al rivenditore contro acquisto di una nuova apparecchiatura di tipo equivalente.

L'utente ha dunque un ruolo attivo: la raccolta differenziata del rifiuto e le successive operazioni di trattamento, recupero e smaltimento favoriscono la produzione di apparecchiature con materiali riciclati e limitano gli effetti negativi sull'ambiente e sulla salute eventualmente causati da una gestione impropria del rifiuto.

Nel caso di RAEE di piccolissime dimensioni (<25 cm), l'utente ha diritto al conferimento gratuito, senza obbligo di contestuale acquisto, ai distributori al dettaglio la cui superficie di vendita specializzata eccede i 400 mq.

IMPORTATO E DISTRIBUITO DA
ELCART DISTRIBUTION SPA
Via Michelangelo Buonarroti, 46
20093 COLOGNO MONZESE (MI)
ITALY
www.elcart.com - info@elcart.it



Made in China