

cudy

cudy

Distributed by  ELCART



ART. 42/98819-00

Model

MC100GSA-20

10/100/1000Mbps Ethernet Media Converter

1. Overview

This product supports IEEE802.3 10 Base-T standard/IEEE 802.3u 100Base-TX/FX standard IEEE 802.3z 1000Base-TX/FX standard, IEEE 802.3x Flow control standard as well as full duplex and half duplex mode.

The media converter transforms the transmission media of Ethernet signal from CAT5 100m to optical fiber 850/1310/1550nm. It can extend the transmission distance to several kilometers or hundred kilometers.

All Media converters apply the new 0.25μm technology to improve the performance and to avoid the packet lost with long the transmission. It also reduce the delay time to less than 9.6 μs.

Using media converter is an economical solution to achieve long distance transmission base on current status.

1. Interface

RJ-45 interface: One port 10/100/1000Base-Tx, the transmission media adopts CAT5 twisted-pair with typical length of 100 meter. It features the function of automatically identifying the through line and cross wire.

Fiber interface: One port 1000Base-Fx, SC/UPC fiber interface is of duplex mode type, including two interfaces, namely TX and RX. When the two sets of optical transceiver are interfaced or connected to switch with fiber interface, the fiber is in cross connection, namely "TX-RX", "RX-TX" (direct butting for single optical fiber).

2. Connection

The network device (work station, hub or switch) with RJ-45 interface is connected to RJ-45 jack of optical transceiver through twisted-pair. And the multi/single mode fiber is connected to SC/UPC fiber interface of the optical transceiver single and dual fiber. Then switch on. The corresponding LED is on for correct connection. (See the table below for the LED indicator lamp).

Table 1 : Front panel for single fiber media converter


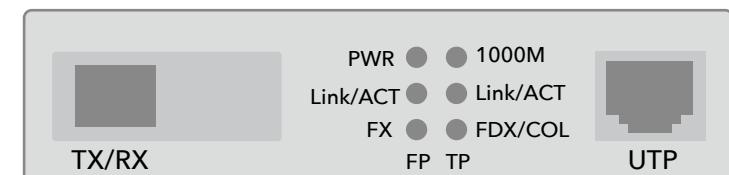


Table 2 : Front panel for dual fiber media converter



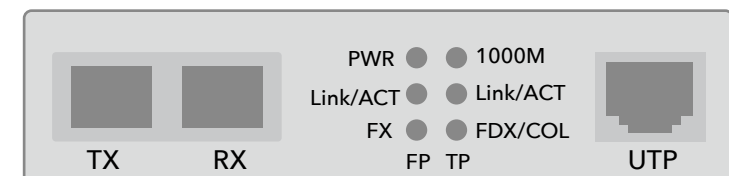

Distributed by ELCART

3. Explanation for LED indicator lamp LED indicator lamps serve as device monitoring and trouble display. The following is the explanation for each LED indicator lamp.

LED	Function	Status	Description
PWR	Power LED	ON	Power is ON
		OFF	Power is Fail
FX	Fiber port signal detect LED	ON	Laser is receiving
		OFF	No laser input
FX-LINK/AC	Fiber port link/action status LED	ON	Fiber link is OK
		Blink	Data is been received or transmitted
		OFF	Fiber link is fail
1000M	UTP port speed LED	ON	1000Mbps speed
		OFF	100Mbps speed
TX-LINK/ACT	UTP port link/action status LED	ON	UTP link is OK
		Blink	Data is been received or transmitted
		OFF	UTP link is fail
FDX/COL	UTP port duplex LED	ON	Full duplex
		OFF	OFF Half duplex

2. Main features

1. In conformity to IEEE 802.3 10 Base-T standard.
In conformity to IEEE 802.3u 100 Base-TX/FX standard.
In conformity to IEEE 802.3z 1000 Base-TX/FX standard.
In conformity to IEEE 802.3x Flow control standard.

2. Max. 2M buffer memory built in chip. Auto negotiation back pressure flow control for full duplex IEEE802.3 X and half duplex.
3. Automatic identification of MDI/MDI-X cross line.
4. High-performance 1.4Gbps memory bandwidth.
5. In conformity to safety code of FCC and 15 CLASS B and CE MARK.

3. Technical parameters

1. Standard Protocol: IEEE802.3 10 Base-T standard
IEEE 802.3u 100Base-TX/FX standard
IEEE 802.3z 1000Base-TX/FX standard
IEEE 802.3x Flow control standard
2. Connector: 1 UTP RJ-45 connector, 1 SC/ST connector
3. Operation mode: full duplex mode or half duplex mode
4. Power supply parameter:
90-240Vac, 50/60Hz with outside switching adaptor: 5V DC
built-in: 110-265VAC or 48VDC
power consumption: 4W
5. Environmental temperature: 0°C - 60 °C
6. Relative humidity: 5%-90% none-condensing
7. BER < 1E-9
8. TP cable: Cat5 UTP cable 100m
9. Transfer fiber:
multi-mode: 50/125, 62.5/125 or 100/140µm
single mode: 8.3/125, 8.7/125, 9/125 or 10/125µm
10. Dimensions:
External power supply: 26mmx 70mm x 95mm
Internal power supply: 30mm x 110mm x 140mm

4. Cautions

1. This product is suitable for indoor application use only.
2. Put on the dust cover of fiber interface when not used.
3. It is forbidden to stare at the TX fiber-transfer end with naked eyes.
4. Single optical fiber transceiver must be used in pair (See the attachment description in delivery).

5. Trouble shooting

1. Device is not matched. Please select the corresponding network device according to the transfer rate of the product (10Mbps or 100Mbps) when connected to other network devices (network card, hub, switch).
2. Line loss is excessive during the fiber wiring. Excessive loss in connector plug-in and fiber soldering welding and excessive intermediate nodes may cause excessive loss rate or abnormal operationmm



Informazione agli utenti ex art. 26 D.Lgs. 49/2014

Il simbolo riportato sull'apparecchiatura (Allegato IX D.Lgs. 49/2014) indica che il rifiuto deve essere oggetto di "raccolta separata" e che è stato immesso sul mercato, in Italia, dopo il 31/12/2010.

Pertanto, l'utente dovrà conferire (o far conferire) il rifiuto ai centri di raccolta differenziata predisposti dalle amministrazioni locali, oppure consegnarlo al rivenditore contro acquisto di una nuova apparecchiatura di tipo equivalente. L'utente ha dunque un ruolo attivo: la raccolta differenziata del rifiuto e le successive operazioni di trattamento, recupero e smaltimento favoriscono la produzione di apparecchiature con materiali riciclati e limitano gli effetti negativi sull'ambiente e sulla salute eventualmente causati da una gestione impropria del rifiuto.

Nel caso di RAEE di piccolissime dimensioni (<25 cm), l'utente ha diritto al conferimento gratuito, senza obbligo di contestuale acquisto, ai distributori al dettaglio la cui superficie di vendita specializzata eccede i 400 mq.



Made in China

6. Ordering information

PN	□TX nm	□RX nm	PTX dBm	SEN dBm	Overload dBm	Distance Km	Loss dB/km	Connector
MC100GMA-05	850	850	-8~-3	≤ -19	≥ -3	0.55	2.5	MM Dual SC
MC100GMA-2	1310	1310	-8~-3	≤ -20	≥ -3	0.55	0.4	
MC100GSA-10	1310	1310	-8~-3	≤ -24	≥ -3	10	0.4	SM Dual SC
MC100GSA-20	1310	1310	-8~-3	≤ -24	≥ -3	20	0.4	
MC100GSA-40	1550	1550	-5~0	≤ -24	≥ -3	40	0.25	
MC100GSA-60A	1550	1550	-5~0	≤ -24	≥ -3	60	0.25	
MC100GSB-10A	1310	1550	-8~-3	≤ -24	≥ -3	10	0.4	SM BIDI SC
MC100GSB-10B	1550	1310	-8~-3	≤ -24	≥ -3	10	0.25	
MC100GSB-20A	1310	1550	-8~-3	≤ -24	≥ -3	20	0.4	
MC100GSB-20B	1550	1310	-8~-3	≤ -24	≥ -3	20	0.25	
MC100GSB-40A	1310	1550	-5~0	≤ -24	≥ -3	40	0.4	
MC100GSB-40B	1550	1310	-5~0	≤ -24	≥ -3	40	0.25	
MC100GSB-60A	1310	1550	-2~+3	≤ -24	≥ -3	60	0.4	
MC100GSB-60B	1550	1310	-5~0	≤ -24	≥ -3	60	0.25	

Distribuito da:

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY Tel. +39 02.25117310 Fax +39 02.25117610 sito internet: www.elcart.com e-mail: tecnico@elcart.it

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.

The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to the performances and the use of the product.

La divulgacion de los datos contenidos en esta ficha son un servicio unicamente informativo y no constituyen ningun vinculo de parte de Elcart respecto a las prestaciones y uso del producto.