

# High-Coded Non-Contact Safety Door Switch D41D

**Matches with machine design.  
Initial setup by batch teaching is  
quick and easy.**



- High-coded safety door switch effective in tamper protection
- Easy automatic teaching
- Fits in narrow spaces and corners inside machines
- Three types of actuators
- Complies with EN ISO 14119 (Type 4/High Coded),  
EN ISO 13849-1 (PLe)



\* The actuator is sold separately.



Refer to **Safety Precautions** on page 20

For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

The D41D is a high-coded safety door switch in which the combination of the switch and actuator is fixed by pairing with more than 1,000 variations available. You can develop applications using compact door switches while minimizing defeat possibilities.

## Three types of actuators fit in narrow spaces and corners inside machinery



**D41D-A1: Standard actuator**

Installation example: swinging door  
• Fits in narrow spaces and corners



**D41D-A2: Flat actuator**


Installation example: acrylic glass door  
• Flat design matches the surroundings



**D41D-A3: Miniature actuator**

Installation example: sliding door, narrow space  
• Compact size for acrylic glass doors

## Easy teaching reduces commissioning time

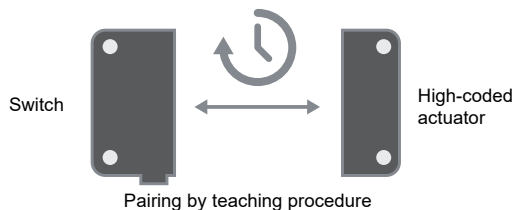

1. Turn the power ON.



2. Move the actuator closer to the switch to start the teaching procedure. The red LED turns ON. After 10 seconds, the yellow LED gives brief cyclic flashes. Turn the power OFF. \*




3. Turn the power ON again to complete the teaching procedure.

\* If you repeat the teaching procedure, you need to wait for 10 minutes after brief cyclic flashes of the yellow LED.

**Easy and quick teaching procedure for protection against tampering.**

## Space saving installation

Flat actuator  
D41D-A2

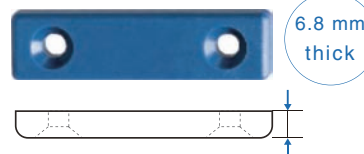

Miniature actuator  
D41D-A3



**No need to worry about installation space in your machine and mismatch with the surroundings.**

Watch a video that shows the easy teaching procedure and actual sizes.  
<https://www.fa.omron.co.jp/video-e/d41d>



# D41D

## Model Number Structure

---

### Model Number Legend

#### Safety Door Switch Switch

**D41D** - □ **C** **D** - □ □  
(1) (2) (3) (4) (5) (6)

**(1) Model**

D: Non-Contact

**(2) Coding level / Teaching limitation**

1: High (Individual coding) / Teaching is not-repeatable

2: High (Individual coding) / Teaching is repeatable

**(3) Connection to controller**

C: Cascade connection

**(4) Diagnosis output**

D: With diagnosis output (Auxiliary output)

**(5) Cable length**

Blank: no cable

025: 25cm

**(6) Connection method**

N1: M8 connector

N2: Connecting cable with M12 connector

**Note:** There are only two types of switch: D41D-1CD-N1 and D41D-2CD-025N2.

#### Actuator

**D41D** - **A** □  
(1) (2)

**(1) Model**

D: Non-contact

**(2) Actuator type**

A1: Standard actuator



A2: Flat actuator

A3: Miniature actuator




## Ordering Information

### List of Models

#### Switches



| Appearance  | Coding level / Teaching limitation | Connection method                               | Cable length | Model                 |
|---|------------------------------------|---|--------------|-----------------------|
|  | High / Teaching is not-repeatable  | M8 connector                                    | ---          | <b>D41D-1CD-N1</b>    |
|  | High / Teaching is repeatable      | Connecting cable 0.25 m long with M12 connector |              | <b>D41D-2CD-025N2</b> |

#### Actuator (Sold separately)



| Appearance  | Name               | Features   | Model          |
|---|--------------------|--|----------------|
|    | Standard actuator  | <ul style="list-style-type: none"> <li>Mounting 2 x M4</li> <li>Dimensions (W x D x H) 39 x 29.5 x 18 (mm)</li> </ul>                                    | <b>D41D-A1</b> |
|   | Flat actuator      | <ul style="list-style-type: none"> <li>Mounting 2 x M5 (Countersunk screw)</li> <li>Dimensions (W x D x H) 60 x 16 x 6.8 (mm)</li> </ul>                 | <b>D41D-A2</b> |
|  | Miniature actuator | <ul style="list-style-type: none"> <li>Mounting 1 x M3 (1.2 dia. hole, plus Twist protection)</li> <li>Dimensions (W x D x H) 22 x 9 x 7 (mm)</li> </ul> | <b>D41D-A3</b> |

#### Accessory (Sold separately)

##### Connecting cables

| Appearance  | Name                                 | Features   | Cable length | Model                      |
|---|--------------------------------------|--|--------------|----------------------------|
|  | Connecting cables with M8 Connector  | Connecting cables with M8 connector (female), 8-pole – 8 x 0.25mm <sup>2</sup> , straight, IP67  | 2 m          | <b>D41D-8P5-CFM8-702M</b>  |
|   |                                      |  | 5 m          | <b>D41D-8P5-CFM8-705M</b>  |
|   |                                      |  | 10 m         | <b>D41D-8P5-CFM8-710M</b>  |
|  | Connecting cables with M12 Connector | Connecting cables with M12 connector (female), 8-pole – 8 x 0.25mm <sup>2</sup> , straight, IP69 | 5 m          | <b>D41L-8P5-CFM12-905M</b> |
|   |                                      |  | 10 m         | <b>D41L-8P5-CFM12-910M</b> |

##### Sealing /Mounting

| Appearance  | Name         | Purpose   | Contents  | Model          |
|---|--------------|---|---|----------------|
|  | Sealing Kit  | Used to seal the mounting holes   | 4 flat plugs and 4 plugs with rim for high screw head | <b>D41D-SK</b> |
|  | Mounting Set | Mounting plate:<br>Used to fix to a non-flat surface such as a profile.<br>Ferrule plug:<br>Used for applications with considerable changes in ambient temperature. | 2 mounting plates and 4 ferrule plugs                 | <b>D41D-MS</b> |

# D41D

## Standards Certification

---

### Directive

- Machinery Directive
- RE Directive
- RoHS Directive
- WEEE Directive



Dispose in accordance with applicable regulations.

### Standards

- EN ISO 13849-1: 2015 PL e Category 4
- EN 60947-5-3
- EN 300 330
- EN ISO 14119
- IEC 61508

### UL Certification

- UL508
- CAN/CSA C22.2 No.14

### Regions where D41D can be used

The product can be used in Japan, the United States, Canada, EU member states, the United Kingdom, China, Australia, and New Zealand.  
The use in other countries may conflict with radio laws of the countries.

## Ratings and Specifications

| Model   |  | D41D  |
|---|--|---|
| <b>Technical</b>  |  |   |
| Detection method  |  | RFID  |
| Frequency band  |  | 125 kHz   |
| Transmitter outputs   |  | -6 dBm max.   |
| Interlock type (ISO 14119)  |  | Type 4  |
| Coded level (ISO 14119)   |  | High  |
| Actuator  |  | D41D-A1, D41D-A2, D41D-A3   |
| Response time (ON to OFF)   |  | 100 ms max.   |
| Risk time   |  | 200 ms max.   |
| Startup time after power ON   |  | 2 s max.  |
| Typical operating distance (Sn)   |  | 12 mm<br>(lateral actuation: 9 mm)  |
| Assured operating distance<br>(assured operating distance, Sao)<br>(IEC 60947-5-3) *1 |  | 10 mm (-10 to 60°C)<br>6 mm (-10 to 60°C, lateral)<br>8 mm (-25 to 65°C)<br>4 mm (-25 to 65°C, lateral) |
| Assured switch-off distance<br>(assured release distance, Sar)<br>(IEC 60947-5-3)     |  | 18 mm<br>(lateral actuation: 15 mm)   |
| Differential travel   |  | <2.0 mm   |
| Repeat accuracy (R)   |  | <0.5 mm   |
| <b>Electrical</b>   |  |   |
| Supply voltage (Ue)   |  | 24 VDC (-15%/+10%)<br>(stabilized PELV-power supply)  |
| Current consumption (Io)  |  | 35 mA   |
| Overvoltage category  |  | III   |
| Pollution degree  |  | 3<br>(UL certification is 2)  |
| Conditional short-circuit current   |  | 100 A   |
| External device fuse rating   |  | 2 A max.  |
| Safety input  | Accepted test pulse duration on input signal | 1.0 ms max.   |
|   | Test pulse interval                          | 100 ms min.   |
|   | Current consumption per input                | 5 mA  |
| Safety output (OSSD)  | Switching element                            | PNP type, short-circuit proof   |
|   | Utilization category                         | DC-12: 24 VDC (Ue)/0.25 A (Ie)<br>DC-13: 24 VDC (Ue)/0.25 A (Ie)  |
|   | Operating current (Ie1)                      | 0.25 A max.   |
|   | Voltage drop (Ud)                            | <1 V  |
|   | Test pulse duration                          | 1.0 ms max.   |
|   | Test pulse interval                          | 1,000 ms  |
| Auxiliary output  | Switching element                            | PNP type, short-circuit proof   |
|   | Utilization category                         | DC-12:24 VDC (Ue)/0.05 A (Ie)<br>DC-13:24 VDC (Ue) /0.05 A (Ie)   |
|   | Operating current (Ie2)                      | 0.05 A max.   |
|   | Voltage drop (Ud)                            | <2 V  |
| Switching frequency (f)   |  | 1 Hz  |
| Rated insulation voltage (Ui)   |  | 32 VDC  |
| Rated impulse withstand voltage (Uimp)  |  | 0.8 kV  |
| Minimum operating current (Im)  |  | 0.5 mA  |
| OFF-state leakage current (Ir)  |  | <0.5 mA   |
| <b>Mechanical</b>   |  |   |
| Fixing screws   |  | 4 × M4 (Refer to the outline drawing for the actuator)  |
| Tightening torque of fixing screws  |  | 0.8 N·m (Refer to the outline drawing for the actuator)   |
| Material  |  | Thermoplastic PBT (enclosure)   |
| Weight  |  | Unit: <50 g, Package: <110 g  |

# D41D

| Model   | D41D   |
|---|--|
| <b>Environmental</b>  |  |
| Ambient operating temperature                                 | -25 to 65°C  |
| Ambient storage temperature (including during transportation) | -25 to 85°C  |
| Ambient operating humidity                                    | 93% max. (non-condensing, non-icing)   |
| Degree of protection (IEC 60529)                              | IP65 and IP67  |
| Vibration resistance  | 10 to 55 Hz, amplitude 1.0 mm  |
| Shock resistance  | 30 g/11 ms   |
| <b>Connection</b>   |  |
| Series connection   | 31 max. *2   |
| Cable lengths   | 100m max.<br>(between switch and power supply)   |
| Connection  | D41D-1CD-N1: M8 connector, 8-pole, A-coded<br>D41D-2CD-025-N2: Connecting cable 0.25 m long with M12 connector |

\*1. Determine the optimum parameter for your machine.

\*2. Refer to *Connection* on page 9 for connection specifications with the Safety controller.

## Safety classification information

|                 |                                |
|-----------------|--------------------------------|
| Standard        | ISO 13849-1, IEC 61508         |
| PL              | e                              |
| DC              | 99%                            |
| Safety Category | 4                              |
| PFH             | $6.8 \times 10^{-10}$          |
| PFD             | $1.2 \times 10^{-4}$           |
| SIL             | Suitable for SIL3 applications |
| Mission time    | 20 years                       |

**Note:** 1. If multiple safety switchgears are involved in the same safety function, the PFH values of the individual components must be added.

## UL

For use in NFPA 79 Applications.

Adapters providing field wiring means are available from the manufacturer.

Refer to manufacturer's information.

For use in Pollution Degree 2 Environment.

## FCC

This device complies with part 15 of the FCC Rules and Industry Canada license-exempt RSS standard(s).

Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

This device complies with the Nerve Stimulation Exposure Limits (ISED RSS-102) for direct touch operations. Changes or modifications not expressly approved by OMRON Corporation could void the user's authority to operate the equipment.

## Engineering Data (Typical Data)

### Detection Range


#### Operating distance

The side allows for a maximum height misalignment (X) of switch and actuator of  $\pm 8$  mm (e.g. mounting tolerance or due to guard door sagging).  
The axial misalignment (Y) is max.  $\pm 18$  mm.



#### Actuating curves

The actuating curves represent the typical operating distance of the safety switch during the approach of the actuator subject to the actuating direction.

Transverse misalignment

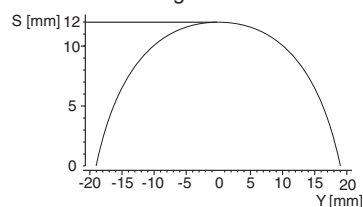

Height misalignment

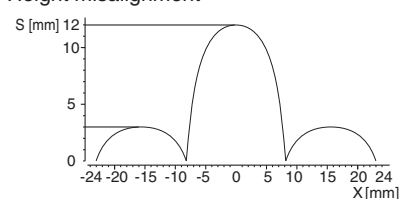

The continuous signal of the yellow LED signals the actuator detection;  
the flashing of the yellow LED signals that the safety door switch is actuated in the different travel area.

Preferred actuation directions: from front or from side

In case of a lateral actuation, the operating distances are reduced by approx. 3 mm.

#### Recommended Adjustment

Align the safety door switch and actuator at a distance of  $0.5 \times$  assured operating distance ( $S_{ao}$ ).

The correct functionality of both safety channels must be checked by means of the connected safety controller.


D41D

Actuator Mounting Direction


(Unit: mm)

D41D-A1

Actuation from front




Actuation from side

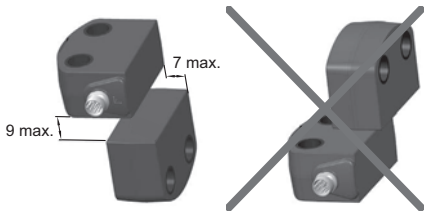


Lateral actuation only from the shown switch side.

D41D-A2

Actuation from front

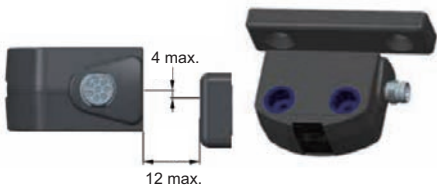


Actuation from side

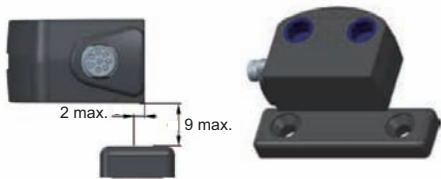


Lateral actuation only from the shown switch side.

D41D-A3

Actuation from front

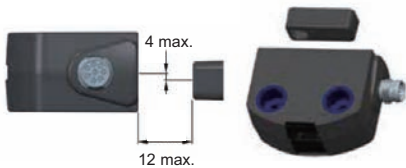

Actuation from side

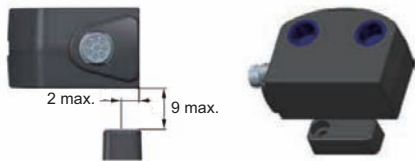


Lateral actuation only from the shown switch side.



## Connection

### Pin assignment

| Function |                  | Pin assignment<br> | Color code of the OMRON's connector<br>(M8/M12 connector cable)<br>M8: D41D-8P5-CFM8-7□□M<br>M12: D41L-8P5-CFM12-9□□M |
|----------|------------------|---|---|
| A1       | U <sub>e</sub>   | 1   | WHITE   |
| X1       | Safety input 1   | 2   | BROWN   |
| A2       | GND              | 3   | GREEN   |
| Y1       | Safety output 1  | 4   | YELLOW  |
| OUT      | Auxiliary output | 5   | GRAY  |
| X2       | Safety input 2   | 6   | PINK  |
| Y2       | Safety output 2  | 7   | BLUE  |
| IN       | without function | 8   | RED   |

**Note:** 1. When using an OMRON cable, the tightening torque of the connector is 1 N•m

### Wiring Examples

The application examples shown are suggestions. They however do not exempt the user from carefully checking whether the Safety door switch and its set-up are suitable for the individual application.

The power supply for the safety door switch must provide protection against permanent overvoltage.

To that effect, stabilized PELV supply units must be used. The safety outputs (OSSD) can be directly connected in the safety circuit of the control system. For applications of PL e / safety category 4 in accordance with ISO 13849-1, the safety outputs (OSSD) of the safety door switch or safety door switch of the chain must be connected to a safety controller or safety relay unit of the same Safety Category. If the safety door switch is wired to relays or to non-safety relevant control components, a new risk analysis must be carried out.


If the safety door switch is connected to the safety input of a safety controller, the controller must have a dual-channel monitoring time of at least 100 ms and the accepted test pulse duration of at least 1 ms. Also, the cross-wire-short monitoring function must be disabled.

#### Wiring example to connect a safety controller

When connecting multiple safety door switches in series, apply 24 VDC to safety inputs X1 and X2 on the Nth unit, as shown in the figure below. Connect safety outputs Y1 and Y2 to safety inputs X1 and X2 of the following safety door switch.










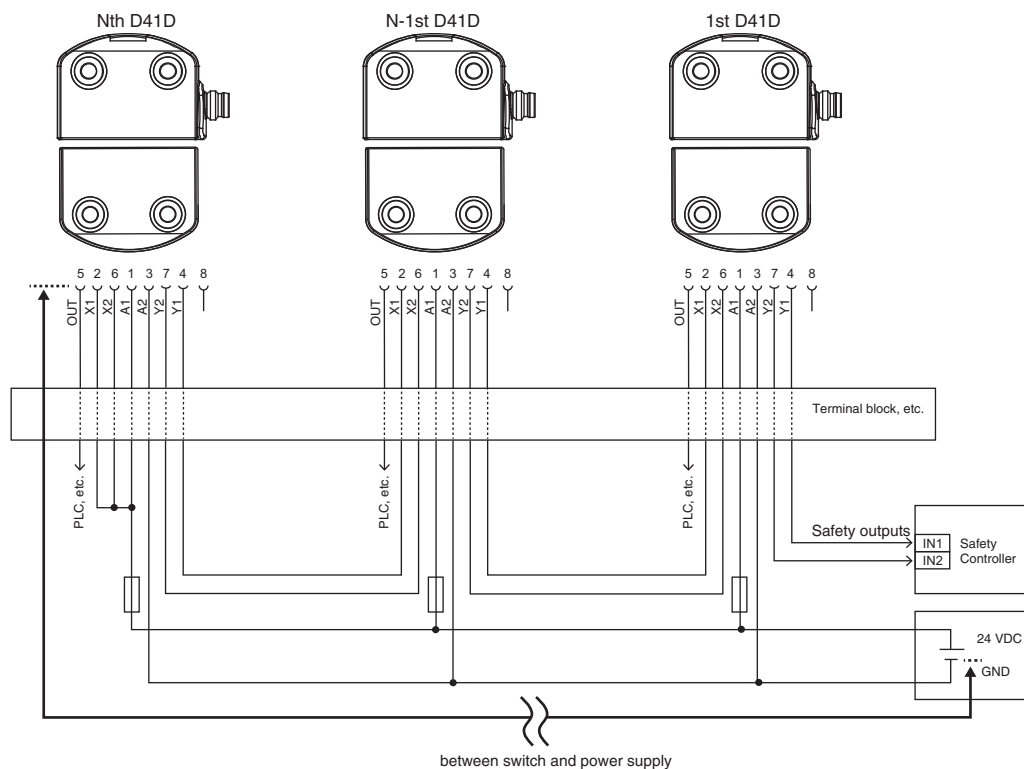

Connect safety outputs Y1 and Y2 of the first unit to the safety controller or safety relay unit. Connect the auxiliary output to the PLC, etc.

When connecting a single safety door switch to the safety controller or safety relay unit, apply 24 VDC to safety inputs X1 and X2 in the same manner as the Nth unit shown below, and then connect safety outputs Y1 and Y2 to the safety controller or safety relay unit.



**Note:** The cable length between the switch and power supply must not exceed 100 m.





## Safety controller settings

| OMRON's safety controller |                           | NX-SL and NX-SI   | GI-SMD/SID   | G9SP  |
|---------------------------|---------------------------|---|--|---|
|                           |                           |    |    |    |
| Input device setting      | Input device              | Semiconductor Output for Dual Channel Equivalent<br>   | Semiconductor Output for Dual Channel Equivalent<br>   | Dual Safety Semiconductor Output (Equivalent)<br>  |
|                           | Discrepancy time          | Set discrepancy time to 100 ms or more<br>NX-Series<br>Safety Control Unit User's Manual<br>Refer to the Dual Channel Evaluation in Cat. No.Z930.<br>Example<br>(Default value when "High-Coded Door Switch" is selected)<br>      | Set discrepancy time to 100 ms or more<br>GI-S series<br>Safety I/O Terminal User's Manual<br>Refer to the Dual Channel Evaluation in Cat. No.Z400.<br>Example<br>(Default value when "High-Coded Door Switch" is selected)<br>              | Set discrepancy time to 0 (disabled) or 100 ms or more<br>G9SP series<br>Safety Controller User's Manual<br>Refer to the Dual Channel Evaluation in Cat. No.Z922.<br>Example<br>                     |
|                           | Filtering out test pulses | Set input filter ON->OFF delay time to 1 ms or more<br>NX-Series<br>Safety Control Unit User's Manual<br>Refer to the Input Filters in Cat. No.Z930.<br>Example<br>(Default value when "High-Coded Door Switch" is selected)<br> | Set input filter ON->OFF delay time to 1 ms or more<br>GI-S series<br>Safety I/O Terminal User's Manual<br>Refer to the Input Filter Function in Cat. No.Z400.<br>Example<br>(Default value when "High-Coded Door Switch" is selected)<br> | Set input filter OFF delay time to 1 ms or more<br>G9SP series<br>Safety Controller User's Manual<br>Refer to the Input Filters in Cat. No.Z922.<br>Example<br>Off On Delay: $0 \times 4 = 0 \text{ ms (0 ms - 1000 ms)}$<br>On Off Delay: $1 \times 4 = 4 \text{ ms (0 ms - 1000 ms)}$ |

**Note:** The ON → OFF delay time affects the response time (safety reaction time) of the system.

Add the setting value to the system response time in each controller. For details on calculating the response time, refer to the manual of each controller.

## Combination with a safety relay unit

| OMRON's safety relay unit          |      | G9SA  | G9SE  | G9SB   | G9SX  |
|------------------------------------|------|---|---|--|---|
|                                    |      |  |  |  |  |
| Input device<br>Safety-door switch | D41D | Connectable   | Not connectable   | Connectable  | Connectable *1  |

\*1. The G9SX-NS□ cannot be connected to D41D.

\*2. Refer to the instruction manual or user's manual of each product for how to extend the wiring.

## Teaching

The D41D will require the following teaching procedure to write individual actuator information (code).

Saving individual actuator information for identification to the switch through the teaching procedure is called "individual coding".

1. Keep the actuator away from the detection range and switch the safety door switch's voltage supply off and back on.
2. Introduce the actuator in the detection range. The teach-in procedure is signalled at the safety door switch, red LED on, yellow LED flashes (1 Hz).
3. After 10 seconds, the yellow LED gives brief cyclic flashes (3 Hz). Switch off the supply voltage of the safety door switch. (If the voltage is not switched off within 5 minutes, the safety door switch cancels the teach-in procedure and signals a false actuator by 5 red flashes).
4. Switch the supply voltage back on. The actuator must be detected once more in order to activate the taught actuator code. In this way, the activated code is definitively saved.

For ordering suffix D41D-1, the executed allocation of safety door switch and actuator is irreversible.

When the above procedure is attempted with a D41D-1 which already completed teaching, the teaching procedure will not start.

For ordering suffix D41D-2, the teach-in procedure for a new actuator can be repeated an unlimited number of times. When a new actuator is taught, the code, which was applicable until that moment, becomes invalid. Subsequent to that, the safety outputs (OSSD) will be disabled for ten minutes, thus providing for an increased protection against intentional tampering.

In case of power failure during the lapse of time, the 10-minute time of the enabling inhibit will stop and start from zero again when power is restored.

When the above procedure is attempted with a combination of D41D-2 and actuator which already completed teaching, the teaching procedure will not start.

The D41D-A Actuator can be taught an unlimited number of times. This allows the actuator taught by the D41D-1 to be taught again by the D41D-2 with no teaching limitation instead of the D41D-1 with teaching limitation.

## Operating Principle

### Operating Principle

The safety outputs (OSSD) can be connected to the safety circuit of the control system. The opening of a guard door, i.e. the actuator is removed out of the active zone of the safety door switch, will immediately disable the safety outputs (OSSD) of the safety door switch.

(For operating distances, refer to *Ratings and Specifications* on page 5.)

Any error that does not immediately affect the functionality of the safety door switch (e.g. too high ambient temperature, interference potential at the safety outputs (OSSD), cross-wire short) will lead to a warning message, disabling of the auxiliary output and a delayed shutdown of the safety outputs (OSSD). (Refer to Table 2 on page 12.)

The safety outputs (OSSD) are disabled if the error warning is active for 30 minutes. The signal combination, auxiliary output disabled and safety channels still enabled, can be used to stop the production process in a controlled manner.

## Diagnostic Functions

### Diagnostic LEDs

The safety door switch indicates the operating condition and faults by means of three-color LEDs located in the front surface of the safety door switch.

- Green (Power): Supply voltage on
- Yellow (Status): Operating condition
- Red (Fault): Error (refer to Table 2)

The safety door switch indicates the operating condition and faults by means of three-color LEDs located in the lateral surfaces of the safety door switch.

The green LED indicates that the safety door switch is ready for operation. The supply voltage is on and all safety inputs are present. Flashing (1 Hz) of the green LED signals that a voltage is missing on one or both of the safety inputs (X1 and/or X2).

The yellow LED always signals the presence of an actuator within range.

If the actuator is operating near the limit of the differential travel range of the safety door switch, the LED is flashing.

The flashing can be used to prematurely detect variations in the clearance between the safety door switch and the actuator (e.g. sagging of a guard door). The safety door switch must be adjusted before the distance to the actuator increases and before the safety outputs (OSSD) are disabled, thus stopping the machine. If an error is detected, the red LED will be activated.

### Auxiliary output







An auxiliary output additionally indicates the operating condition (refer to Table 1). The auxiliary output OUT can be used for central visualization or control functions, e.g. in a PLC. It indicates the switching condition as shown in Table 1.

**Table 1: Diagnostic information for safety door switch**


| Status of switch                    | LEDs          |         |               | Auxiliary output | Safety outputs Y1, Y2 | Note   |
|-------------------------------------|---------------|---------|---------------|------------------|-----------------------|--|
|                                     | Green         | Red     | Yellow        |                  |                       |  |
| Supply voltage                      | On            | Off     | Off           | 0 V              | 0 V                   | Voltage on   |
| Actuated                            | On            | Off     | On            | 24 V             | 24 V                  | The yellow LED always signals the presence of an actuator within range.  |
| Actuated in limit area              | On            | Off     | Flashes (1Hz) | 24 V pulsed      | 24 V                  | The safety door switch must be adjusted before the distance to the actuator increases and before the safety outputs are disabled, thus stopping the machine. |
| Error warning, switch actuated      | Off           | Flashes | On            | 0 V              | 24 V                  | When the error warning is not rectified, the safety outputs are disabled after 30 minutes.   |
| Error                               | Off           | Flashes | On            | 0 V              | 0 V                   | Refer to Table 2   |
| Teach actuator                      | Off           | On      | Flashes       | 0 V              | 0 V                   | Safety door switch in teaching mode  |
| Tampering protection time *1        | Flashes       | Off     | Off           | 0 V              | 0 V                   | 10 minutes pause after re-teaching   |
| Error in input circuit X1 and/or X2 | Flashes (1Hz) | Off     | Off           | 0 V              | 0 V                   | When door is open  |
| Error in input circuit X1 and/or X2 | Flashes (1Hz) | Off     | On            | 24 V             | 0 V                   | When door is closed  |

\*1. Refer to *Teaching* on page 11.

**Table 2: Error message/LED indication (red)**



| LED indication (red) |   | Error cause   |
|----------------------|---|---|
| 1 flash pulse        |  | Error output Y1   |
| 2 flash pulses       |  | Error output Y2   |
| 3 flash pulses       |  | Cross-wire short between Y1 and Y2                      |
| 4 flash pulses       |  | Ambient temperature too high                            |
| 5 flash pulses       |  | Incorrect or defective actuator                         |
| Continuous red       |  | Internal fault, with yellow flashing teaching procedure |

## Dimensions


 (Unit: mm)

### Switches

D41D-1CD-N1

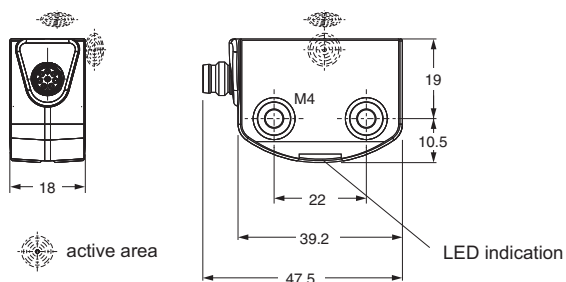

D41D-2CD-025N2


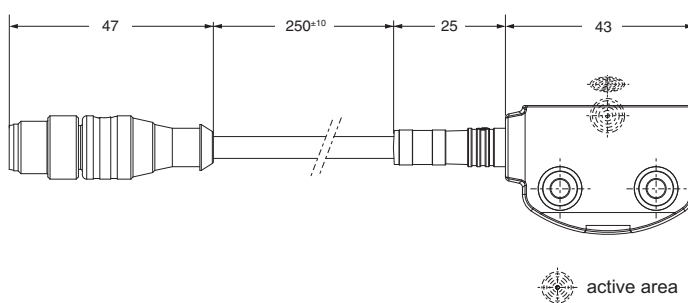


# D41D

(Unit: mm)


## Actuator (Sold separately)

### D41D-A1

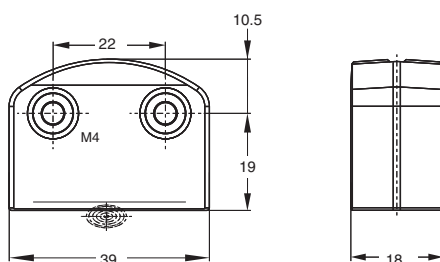


M4 screw  
(Tightening torque: 0.8 N•m)

### D41D-A2

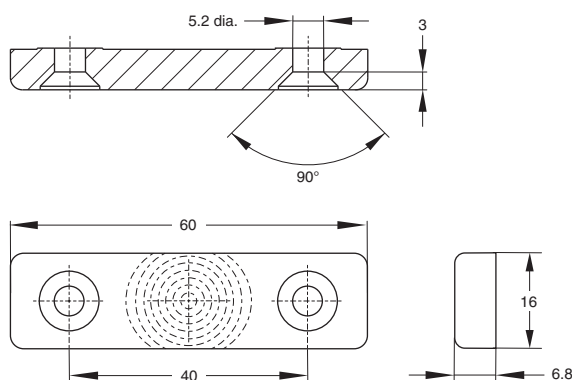


M5 countersunk screw  
(Tightening torque: 2 N•m)

### D41D-A3

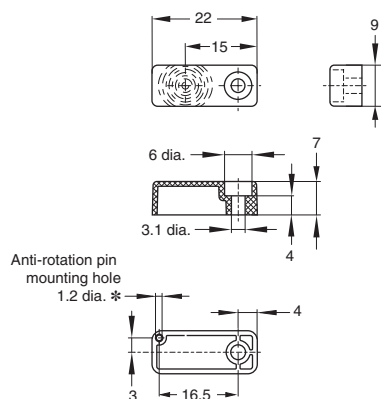


\* D41D-A3 mounting hole is fixed in place with an M3 screw.  
The actuator can be prevented from twisting caused by screw tightening torque during installation by passing a pin up to 1.1 mm in size through the hole in the rear section of the D41D-A3.



M3 screw  
(Tightening torque: 0.6 N•m)  
1.2 dia. hole, plus Twist protection

## Accessory (Sold separately)

### Sealing kit D41D-SK



### Mounting Set D41D-MS



## Mounting

The mounting holes provide for a mounting by means of M4 screws (max. tightening torque 0.8 N•m).


The product can be mounted in any position. The minimum bend radius of the cable is 25 mm.

The active areas of the safety door switch and the actuator have to face each other.

The safety door switch must only be used within the assured operating distances  $\leq S_{ao}$  and  $\geq S_{ar}$ .

To avoid any interference inherent to this kind of system and any reduction of the operating distances, please observe the following guidelines:

- See the figures below for the minimum distances between two safety door switches and other systems of the same frequency (125 kHz).

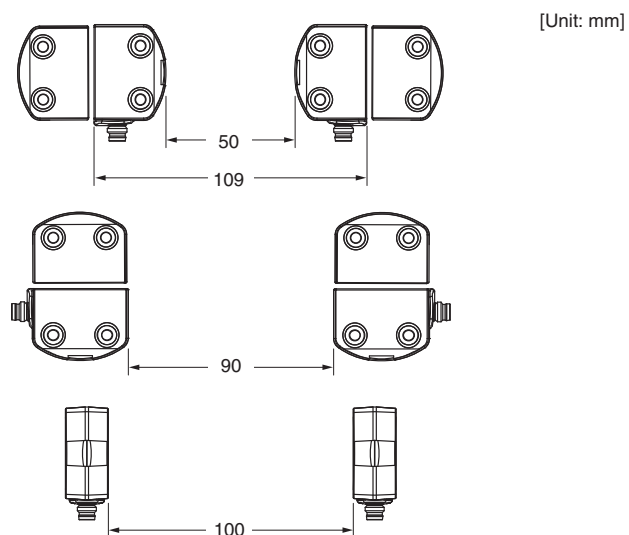

## Troubleshooting

---

### Operation in case of errors

Errors that, which no longer guarantee the function of the safety door switch (internal errors) cause the safety outputs (OSSD) to be disabled within the risk time.

After the rectification of the error, the error message is reset by opening the corresponding guard door.

### Error warning

When an error (warning) occurs, the safety outputs (OSSD) are disabled after being enabled for 30 minutes. After the error cause is removed, the warning indication (e.g., LED flashes) is reset.

### Diagnostic information for switch and error message

The switch indicates the operating condition and faults with its three-color LED and the errors with its red LED. Refer to Tables 1 and 2 on page 12 for details.




## Wiring

### Wiring example 1. D41D and G9SA Wiring Example (Single Connection)

#### Model

Safety Door Switch D41D-□CD-□□/D41D-A□

Safety Relay Unit G9SA-301 (24 VAC/VDC)

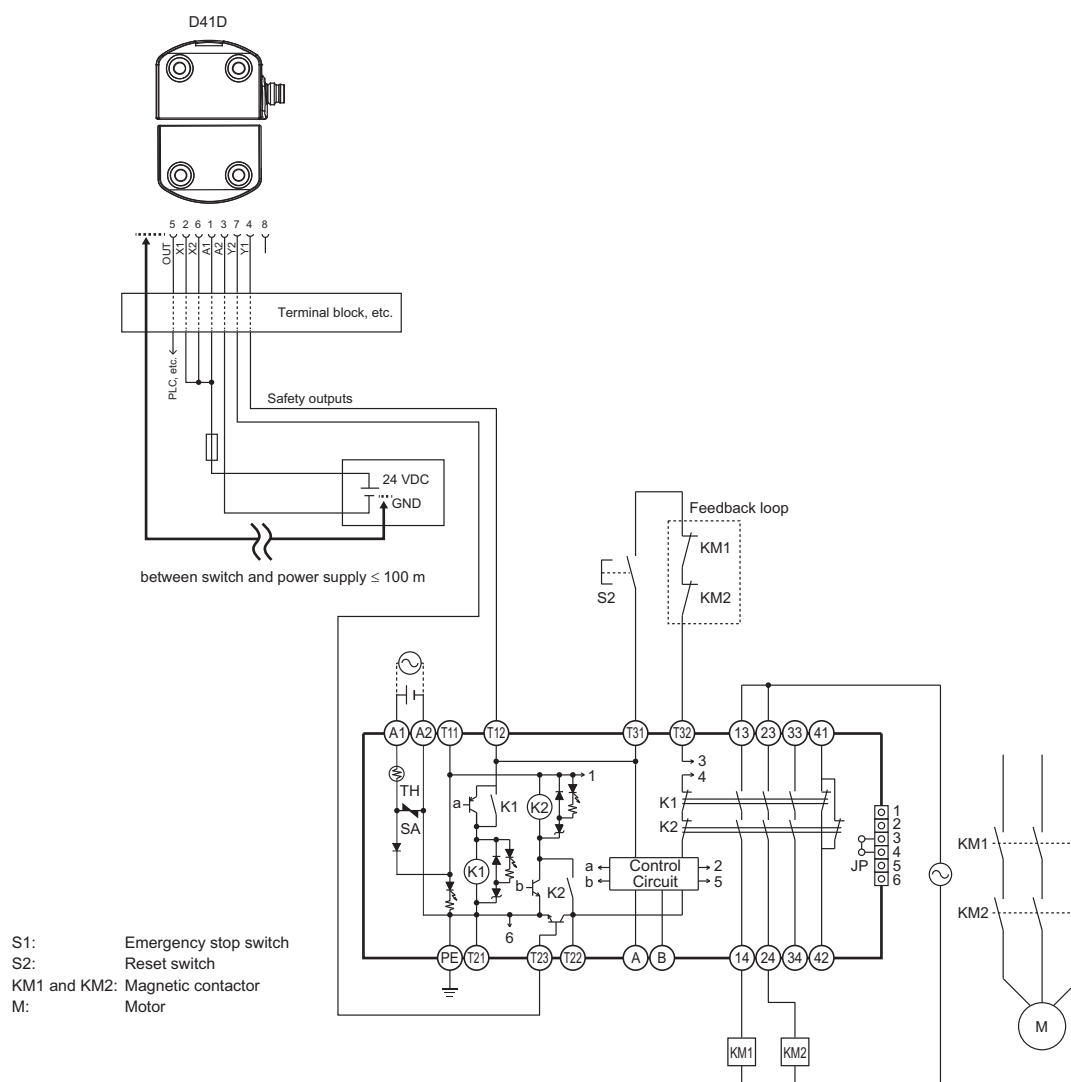


## Wiring 2. D41D and G9SA Wiring Example (Series Connection)

### Model

Safety Door Switch D41D-□CD-□□/D41D-A□

Safety Relay Unit G9SA-301 (24 VAC/VDC)

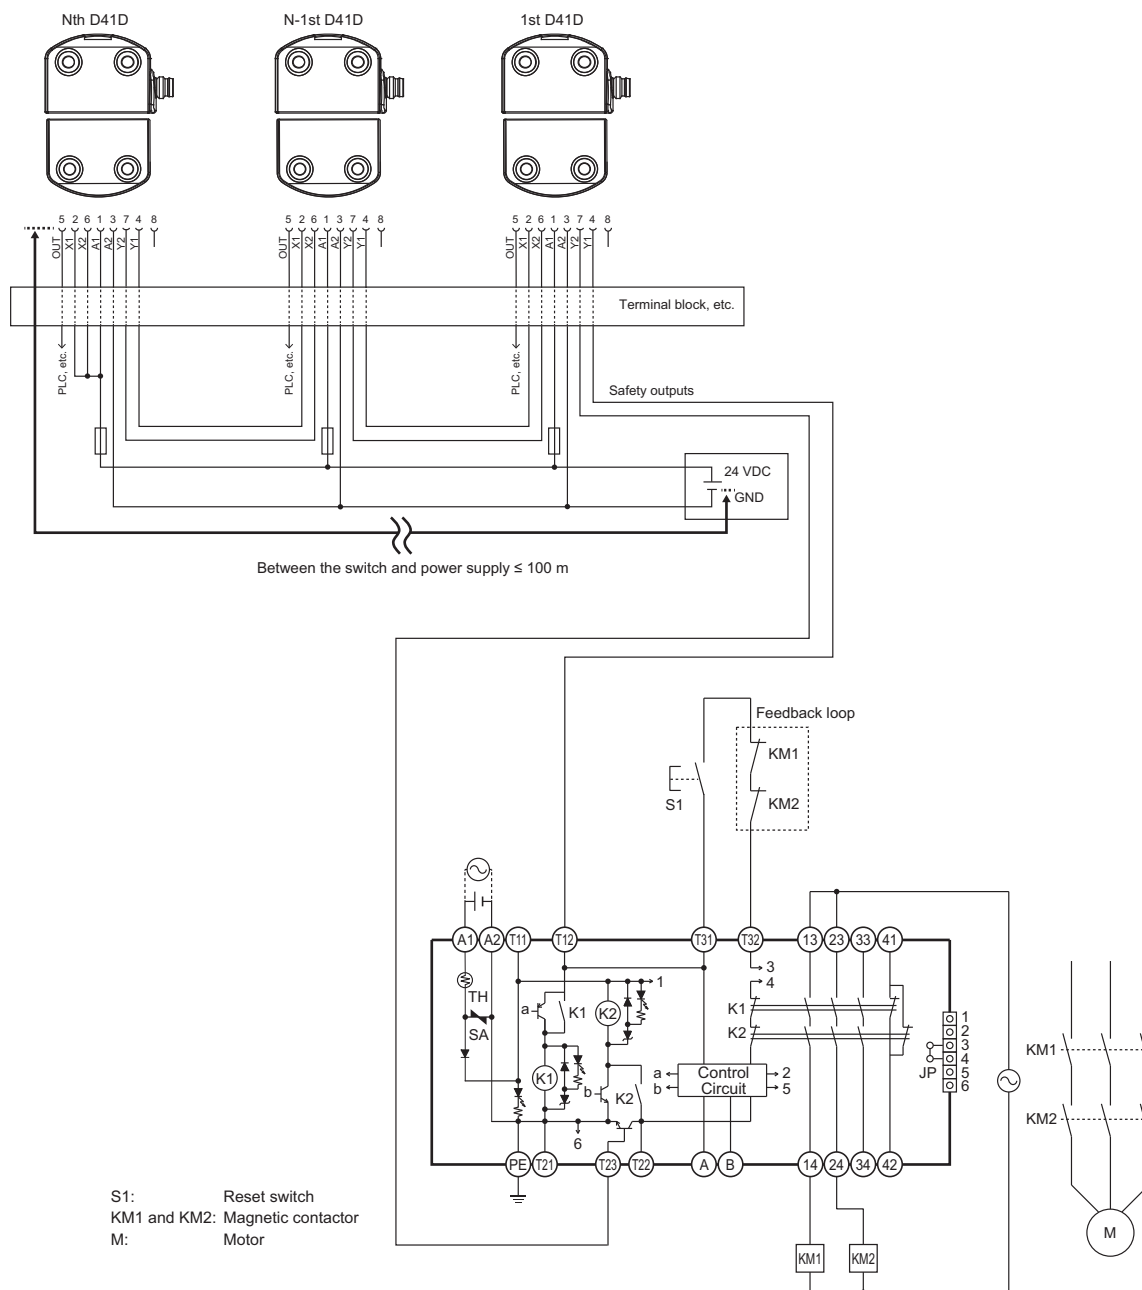

## Set-up and Maintenance/Disassembly and Disposal

---

### Set-up and Maintenance

#### Functional testing

The safety function of the safety components must be tested.

The following conditions must be previously checked and met:

1. Fitting of the switch and the actuator.
2. Fitting and integrity of the power cable.
3. The system is free of dirt and soiling (in particular metal chips).

#### Maintenance

Maintenance frequency

SIL3 / PLe at least once a month

SIL2 / PLd at least once a year

The following inspections must be carried out:

(Daily inspection)

- For each guard door, check that the machine stops when the guard door opens.

(Inspection every 6 months)

Regularly conduct visual and functional inspections including:

1. Check the fitting and integrity of the safety door switch, the actuator and the cable.
2. Remove possible metal chips.
3. Check that the cable is connected correctly and there is no problem.

### Disassembly and Disposal

#### Disassembly

The product must be disassembled in a de-energized condition only.

#### Disposal


The product must be disposed of in an appropriate manner in accordance with the national prescriptions and legislations.

## Safety Precautions



Be sure to read the precautions for all models in the website at: <http://www.ia.omron.com/>.

### Indication and Meaning for Safe Use

#### Warning Indications

|  |  |
|--|--|
|  <b>WARNING</b> | Indicates a potentially hazardous situation which, if not avoided, will result in minor or moderate injury, or may result in serious injury or death. Additionally there may be significant property damage. |
| <b>Precautions for Safe Use</b>  | Supplementary comments on what to do or avoid doing, to use the product safely.  |
| <b>Precautions for Correct Use</b>   | Supplementary comments on what to do or avoid doing, to prevent failure to operate, or undesirable effect on product performance.  |

#### Meaning of Product Safety Symbols

|   |  |
|---|--|
|  | <b>General prohibition</b><br>Instructions on unspecified prohibited action. |
|  | <b>General instructions</b><br>Instructions on unspecified general action.   |

### WARNING

Use only appropriate components or devices complying with relevant safety standards corresponding to the required performance level and safety category. Failure to do so may result in serious injury or death. Conformity to requirements of the performance level and safety category must be determined as an entire system. It is recommended to consult a certification body regarding assessment of conformity to the required safety level.



Do not apply DC voltages exceeding the rated voltages, nor any AC voltages to the product. Failure to do so may result in serious injury or death.



Install the switch and actuator in a position where the opening of the guard door can be detected within a safe distance. Failure to do so may result in serious injury or death.



When complying with safety standards, install the product in an appropriate manner in accordance with ISO 14119, with due consideration of the risk of defeat by the operator. Failure to do so may result in serious injury or death.



Make sure that the DC power supply meets the following items. Failure to do so may result in serious injury or death.

- Satisfies the requirements of PELV power supply defined in IEC 60204-1.
- Satisfies the requirements of class 2 circuits defined in UL508.



#### Precautions for Safe Use

1. Disconnect the product from power supply when wiring the product. Failure to do so may cause unexpected operation of devices connected to the product.
2. Wire the input and output terminals correctly and verify the correct operation of the product before using the system in which the product is incorporated. Incorrect wiring may lead to loss of the safety function.
3. Do not use the product in any direction other than the specified mounting orientations of the main body and actuator.
4. Dispose of the product in accordance with the laws set by each country.

#### Precautions for Correct Use

1. Do not drop the product to the ground or expose to excessive vibration or mechanical shocks. Doing so may damage the product and cause failure.
2. Do not store or use the product under the following conditions. Doing so may damage the product and cause failure.
  - 1) At ambient operating temperatures out of the range of -25 to 65°C
  - 2) At ambient storage temperatures out of the range of -25 to 85°C
  - 3) At relative humidity of 93% or more
  - 4) In direct sunlight
  - 5) Under drastic temperature changes
  - 6) In high humidity that causes condensation
3. Keep the product away from oil or solvent. Oil or solvent make the marking on the product illegible and cause deterioration of some parts.
4. Do not use in an environment with corrosive gas.
5. The product may not operate normally in the vicinity of devices that generate strong radio waves or magnetic fields, such as RFID systems, proximity sensors, motors, inverters, and switch-mode power supplies. If the device is used in the vicinity of such devices, check the effect before use.
6. Installing the switch and the actuator on a metallic material may affect the operating distance. If installation on a metallic material is necessary, be sure to check the effect on the operating distance before use.
7. Tighten the screws with a specified torque.
8. Use the wires specified by OMRON to wire the product. (Refer to *Connection* on page 9.)
9. Do not extend the cables in excess of the specification of this product. Carry out electrical connection according to the wiring examples shown in this document and verify the correct operation of the product.
10. During installation, make sure that the safety door switch does not come in contact with the actuator due to rattling of the guard door. (The performance of the product may be degraded by a collision caused by opening or closing the guard door.)
11. Do not pull or bend the cable excessively. A disconnection may cause a malfunction.
12. Risk time remains unchanged by series connection. However, carry out electrical connection according to the wiring examples shown in this document.
13. Be sure to inspect the product daily and every 6 months. Failure to do so may cause a system failure and serious injury.
14. When determining the safety distance, take into account the delay of the output of the product caused by the response time. Failure to do so may cause the operator to reach the hazardous source before the machine is stopped, resulting in serious injury.
15. Install the product so that the LED indicators of the safety door switch are as visible as possible. Misinterpreting the status of the safety door switch may result in danger.
16. Do not use the product at an altitude of 2,000 m or higher.
17. Do not connect a product different from this product in series with this product. Doing so may disturb waveforms of the input and output signals, leading to loss of the safety function.
18. Do not use the product in the water or continuous water exposure environment. Doing so may cause water to leak into the product. (The degree of protection does not guarantee the protection under continuous water exposure environment.)

- 
19. Do not tamper the product with a replacement actuator.  
Store replacement actuators in a safe place where they cannot be easily reached.
  20. Build a safety system using the outputs of both Safety Outputs 1 and 2. Wiring with only one safety output may lead to loss of the safety function due to a single failure.
  21. Wiring should meet the requirements specified in Section 9.4.3 of IEC 60204-1 to prevent malfunction due to ground faults in the safety output lines.
  22. Do not wire the product to an input of a safety controller in parallel.
  23. Do not try to disassemble, repair, or modify the product. Doing so may cause loss of the safety function.
  24. Do not operate the product in an environment with flammable or explosive gas.
  25. After installation of the product, qualified personnel should verify to see that the installation, inspection, and maintenance are properly performed. The qualified personnel should be qualified and authorized to secure the safety on each phase of design, installation, running, maintenance and disposal of system.
  26. Auxiliary output is NOT a safety output. Do not use the Auxiliary output individually for any safety function. Such incorrect use causes loss of the safety function of the product and its relevant systems.
  27. Disconnect the product and the controller connected to the product from power supply when replacing the product. Failure to do so may cause unexpected operation of devices connected to the product.
  28. The safety function may not operate normally due to a malfunction of the wiring, setting, or switch, and the machine may continue to operate, which may result in personal injury. Make sure that the safety function works before starting operation.
  29. Do not use the product as a door stopper. (The performance of the product may be degraded due to a collision caused by opening and closing the guard door.)

This image shows a full page of white paper with horizontal grey ruling lines. The word "MEMO" is printed at the top center in bold black capital letters. The rest of the page is filled with evenly spaced horizontal lines, typical of notebook paper.

# Terms and Conditions Agreement

## **Read and understand this catalog.**

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## **Warranties.**

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

## **Limitation on Liability: Etc.**

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

## **Suitability of Use.**

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

## **Programmable Products.**

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

## **Performance Data.**

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

## **Change in Specifications.**

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

## **Errors and Omissions.**

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

# High-Coded Safety Door Switch

OMRON

High-Coded Non-Contact Safety Door Switch

D41D

Matches with machine design. Initial setup by batch teaching is quick and easy.

- High-coded safety door switch effective in tamper protection
- Easy automatic teaching
- Fits in narrow spaces and corners inside machines
- Three types of actuators
- Complies with EN ISO 14119 (Type A High Coded), EN ISO 13849-1 (PL+)

The actuator is easily adjustable. The non-contact sensor can be adjusted to suit the door thickness. The actuator is easily adjustable. The non-contact sensor can be adjusted to suit the door thickness.

Three types of actuators fit in narrow spaces and corners inside machinery

Vertical actuator

Horizontal actuator

Diagonal actuator

Easy teaching reduces commissioning time

Teaching mode

Normal mode

Space saving installation

Standard installation

Space saving installation

Resistant to noise about 100dB(A) in your machine and resistant with the surroundings

Resistant to noise

Resistant to noise

1

High-Coded Non-Contact Safety Door Switch D41D (No.F112)

OMRON

High-Coded Guard Lock Safety Door Switch

D41L

Designed for hygiene-sensitive machines

- High-coded safety door switch effective in tamper protection
- Hygienic design with a smooth surface that leaves no wiping unnecessary and prevents water or dust accumulation
- Smooth surface leaves no wiping unnecessary
- Complies with EN ISO 14119 (Type A High Coded), EN ISO 13849-1 (PL+), IECEx AEx 10000

The actuator is easily adjustable. The non-contact sensor can be adjusted to suit the door thickness. The actuator is easily adjustable. The non-contact sensor can be adjusted to suit the door thickness.

Features

The D41L is a high-coded safety door switch in which the combination of the switch and actuator is fixed by joining with more than 1,000 variations possible. This combination is effective in preventing tampering.

Identical mounting for left and right hinged doors

Left hinged door

Right hinged door

High tolerance to door misalignment

High tolerance

High tolerance

Easy teaching force adjustment

Easy teaching

Easy teaching

LED display

LED display

LED display

1

High-Coded Guard Lock Safety Door Switch D41L (No.F113)

OMRON

High-Coded Guard Lock Safety Door Switch (For Gate)

D41G

Prevent people from being trapped inside hazardous areas

- High-coded safety door switch effective in tamper protection
- Integrated door handle structure reduces jamming during door operation
- Integrated handle's smooth operation enables quick emergency exit
- Switch can be unlocked to avoid being trapped inside when power is not supplied
- Complies with EN ISO 14119 (Type A High Coded), EN ISO 13849-1 (PL+)

The actuator is easily adjustable. The non-contact sensor can be adjusted to suit the door thickness. The actuator is easily adjustable. The non-contact sensor can be adjusted to suit the door thickness.

Features

The D41G is a high-coded safety door switch in which the combination of the switch and actuator is fixed by joining with more than 1,000 variations possible. This combination is effective in preventing tampering.

Reduce maintenance effort

Maintenance frequency due to door misalignment can be reduced

Maintenance frequency

Maintenance frequency

Rolling hazardous area (overlapping walls)

Rolling hazardous area

Rolling hazardous area

Actuator with integrated emergency exit switch

Actuator with integrated emergency exit switch

Actuator with integrated emergency exit switch

1

High-Coded Guard Lock (For Gate) Safety Door Switch D41G (No.F114)

Note: Do not use this document to operate the Unit.

OMRON Corporation Industrial Automation Company

Kyoto, JAPAN

Contact : [www.ia.omron.com](http://www.ia.omron.com)

## Regional Headquarters

OMRON EUROPE B.V.  
Wegalaan 67-69, 2132 JD Hoofddorp  
The Netherlands  
Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

OMRON ASIA PACIFIC PTE. LTD.  
438B Alexandra Road, #08-01/02 Alexandra  
Technopark, Singapore 119968  
Tel: (65) 6835-3011 Fax: (65) 6835-3011

OMRON ELECTRONICS LLC  
2895 Greenspoint Parkway, Suite 200  
Hoffman Estates, IL 60169 U.S.A.  
Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

OMRON (CHINA) CO., LTD.  
Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China  
Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388

Authorized Distributor:

©OMRON Corporation 2021-2025 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.  
**CSM\_5\_4**  
**Cat. No. F112-E1-08** 0325 (0321)