


XUK8TAE1MM12 / XUK8TAE2MM12 Diffuse distance sensor with background suppression



XUK8TAE1MM12: Qa → 0...10V
XUK8TAE2MM12: Qa → 4...20mA



IO-Link



ECOLAB




UKCA



UL US

Background suppression (BGS)






<https://tesensors.com/global/en/document/EAV83773>

Scan the Qr-code to access this Instruction Sheet in different languages or you can download it from our website at: www.tesensors.com


We welcome your comments about this document. You can reach us through the customer support page on your local website.

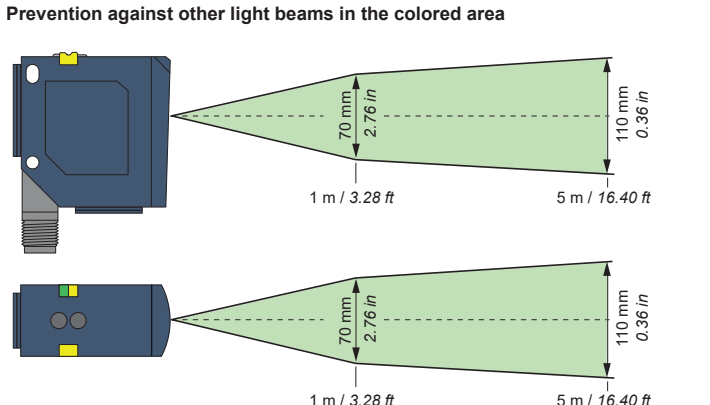


Adjustment

Adjustment of light spot position with optional mounting angle bracket XUZASK004.


Align sensor to the target object.
Observe the preferential direction of proximity switches.

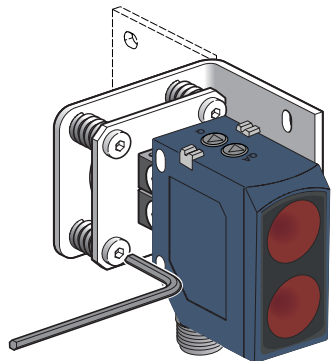

Mounting and Tightening torques

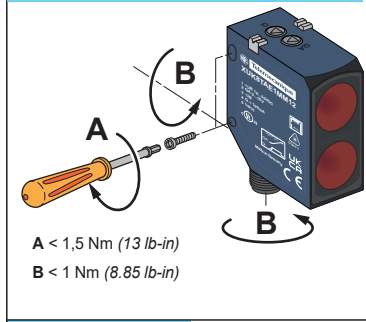

LEDs and Setting

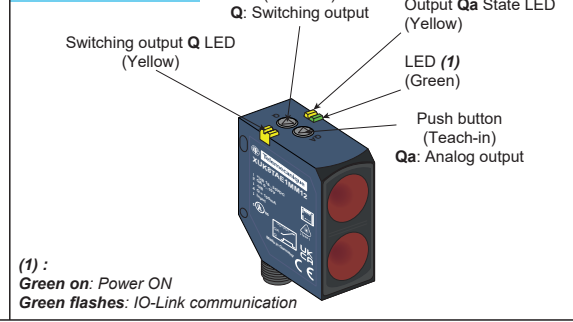

Push button (Teach-in)
Q: Switching output


Output **Qa** State LED (Yellow)

LED **(1)** (Green)


Push button (Teach-in)
Qa: Analog output

Switching output **Q** LED (Yellow)

Dimensions

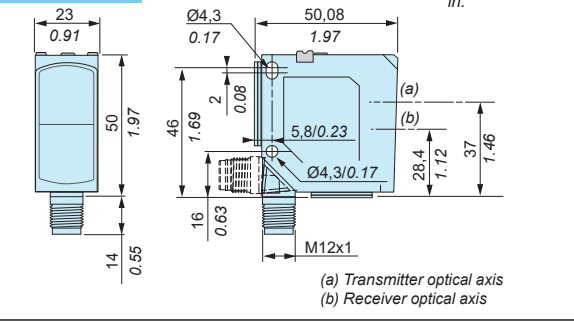

Wiring diagrams

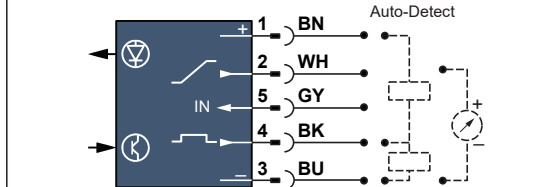

Extension cable reference: **XZCPV11V12L2 / L5 / L10**
In **IO-Link** mode, a 4-pin cable must be used

M12 Connector

1: (+U_B)
2: Q_A
3: (-U_B)
4: Q/IO-Link
5: IN

5-pin

Output

Q_A


Q

BN: Brown
WH: White
GY: Grey
BK: Black
BU: Blue


Wiring precautions

Use certified CYJV or R/C CYJV2 cable assemblies

Detection curves

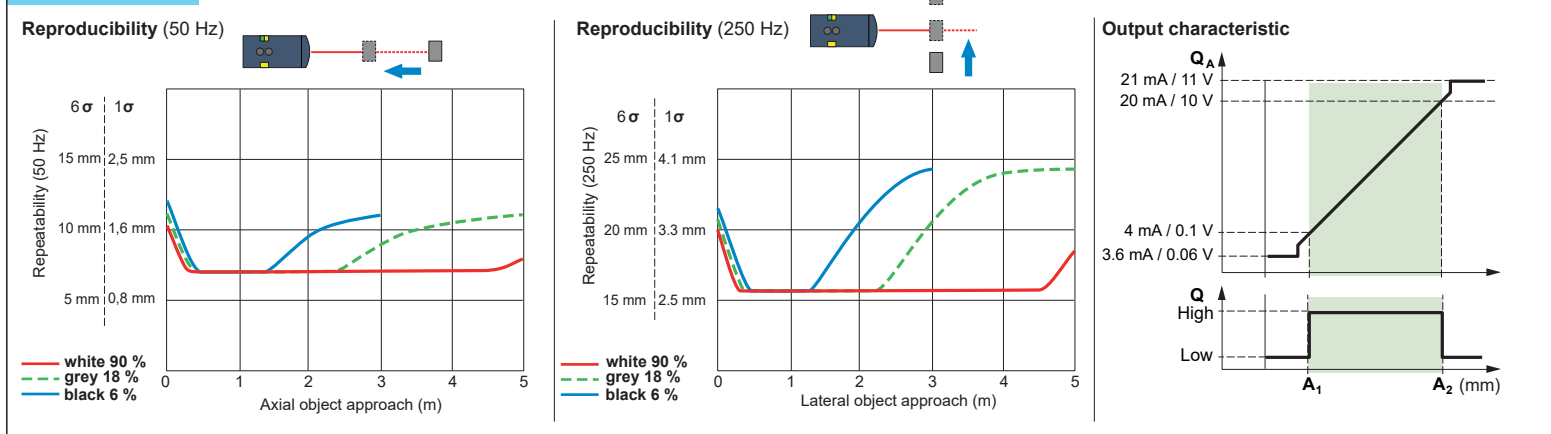

Size of light spot

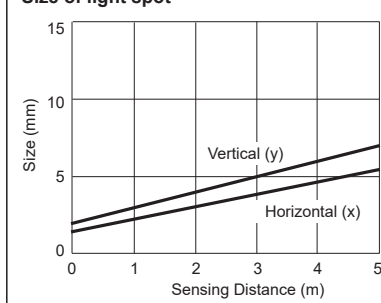



Manufacturer :

Schneider Electric Industries SAS
35 rue Joseph Monier
92500 Rueil Malmaison
France



UK Representative :

Schneider Electric Limited
Stafford Park 5
Telford, TF3 3BL
United Kingdom



Уполномоченный поставщик в Республике Казахстан:

ТОО «Шнейдер Электрик»
Адрес: 050010, РК, г. Алматы, пр. Достык, 38, Бизнес Центр «Кен Дала», 5 этаж.
Тел. +7 (727) 3 57 23 57
Факс.: +7 (727) 357 24 39

Қазақстан Республикасында ресми жеткізуші:

ЖШС «Шнейдер Электрик»
Мекен-жайы: 050010, Қазақстан Республикасы, Алматы қ., Достық даң. 38, «Кен Дала» Бизнес Орталығы, 5-ші қабат.
Тел.: +7 (727) 357 23 57
Факс.: +7 (727) 357 24 39

Characteristics

Certification	CE - UKCA - cULus - Ecolab	
Sensing distance (Reference material)	White	0,1...5 m / 0.33...16.4 ft
	Grey	0,1...5 m / 0.33...16.4 ft
	Black	0,1...3 m / 0.33...9.84 ft
Setting	Teach button	
Color of detection light beam	Laser class 1, red, 655 nm	
Spot size of the light beam	see "Light beam size" curve	
	Wavelength	λ = 655 nm
	Puls duration	t < 5 ns
	Frequency	f = 62,5 kHz
	Limit of radiant power pulse	Pp < 1,25 mW
Switching output Q	Auto-Detect PNP/NPN (N.O. or N.C.) - IOLINK	
Control input IN (switching function Q): see illustration G	+U _B = Teach-in	
	-U _B = 	
	Open = normal function	 = button locked
Current consumption	≤ 60 mA	
Switching capacity	≤ 100 mA	
Analog output Qa	XUK8TAE1MM12	XUK8TAE2MM12
	0...10 V	4...20 mA
Switching frequency	≤ 500 Hz	
First-up delay	300 ms max.	
Response time	1,2 ms max.	
Recovery time	1,2 ms max.	
Ambient Temperature	Operating : - 20...+60 °C (-4...+140 °F) Storage : - 20...+80 °C (-4...+176 °F)	
Power Voltage	Rated operational voltage: 24 Vdc Ripple p-p 10% maximum Operating range: 18...30 Vdc (including ripple)	
Product Protection	Power supply : Reverse polarity protection Output: Short circuit protection	
Protection class		
Degree of protection	IP67 conforming to EN/IEC 60529 IP69K conforming to DIN 40050	
Vibration resistance	Frequency range: 10 Hz to 55 Hz Acceleration: 7 gn	
Shock resistance	Peak acceleration: 10 gn Duration of the pulse: 11 ms	
Permitted cable length	100 m / 328.1 ft	
Material	Housing: ABS/PC, Lens: PMMA	

 **IO-Link** Data sheet and IODD IO-Link on website: <https://tesensors.com/iolink>

⚠ WARNING

UNINTENDED EQUIPMENT OPERATION

- Comply with the wiring and configuration instructions.
- Clean the lens regularly, taking care not to scratch it.
- Check the connections and fixings during maintenance operations.

Failure to follow these instructions can result in death, serious injury or equipment damage.

⚠ CAUTION

HAZARD OF LASER RADIATION EXPOSURE


- Do not stare into the beam.
- Do not operate below - 20 °C (- 4 °F)
- Follow all operating instructions.

Failure to follow these instructions can result in injury or equipment damage.




CLASS 1 LASER PRODUCT (IEC 60825-1: 2014)
Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to laser Notice No. 56 dated May, 2019

Accessories

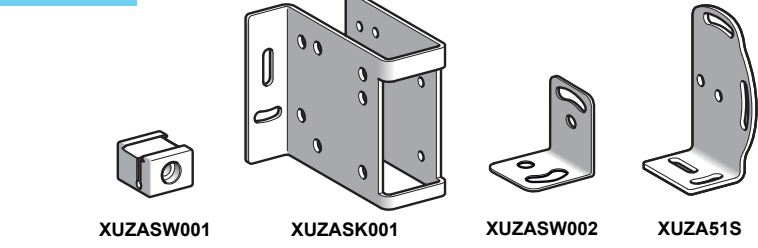

 Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel.
No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.
© 2022 Schneider Electric. "All Rights Reserved."

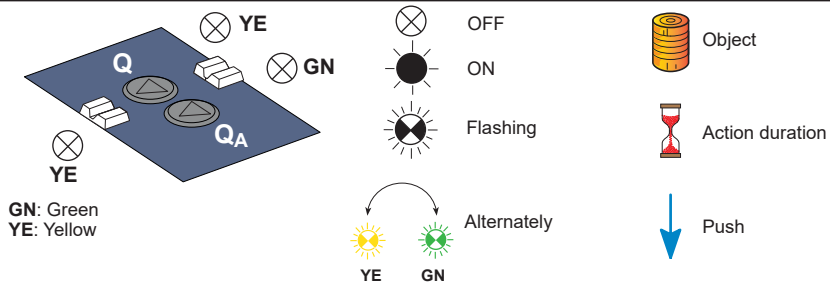

Setting

The sensor has an analogue and a switching output, which can be set independent of each other.

Analog output: The two teach points identify the beginning and end of the measuring area and scale the analog output (see Chapter B).

Teach 1: 4 mA / 0,1 V .

Teach 2: 20 mA / 10 V .


Switching output: The two teaching points identify the beginning and end of the switching window (see Chapter C).

Setting modes: The teach sequence and object distance determine the characteristics of the analog output Q_A and the window width of the switching output Q (see Chapter D).

Factory setting


Function	Action Step 1 (1)		See illustration
	Teach-button	External teach	
Analogue characteristic	press Q _A > 3 s	connect IN > 3 s	B
Switching window	press Q > 3 s	connect IN > 6 s	C
N.O. / N.C.	press Q > 10 s	connect IN > 10 s	E
Auto-Detect / NPN / PNP	press Q > 13 s	connect IN > 13 s	F

(1) Step 2: press Q_A (or Q) / connect IN > 1 s

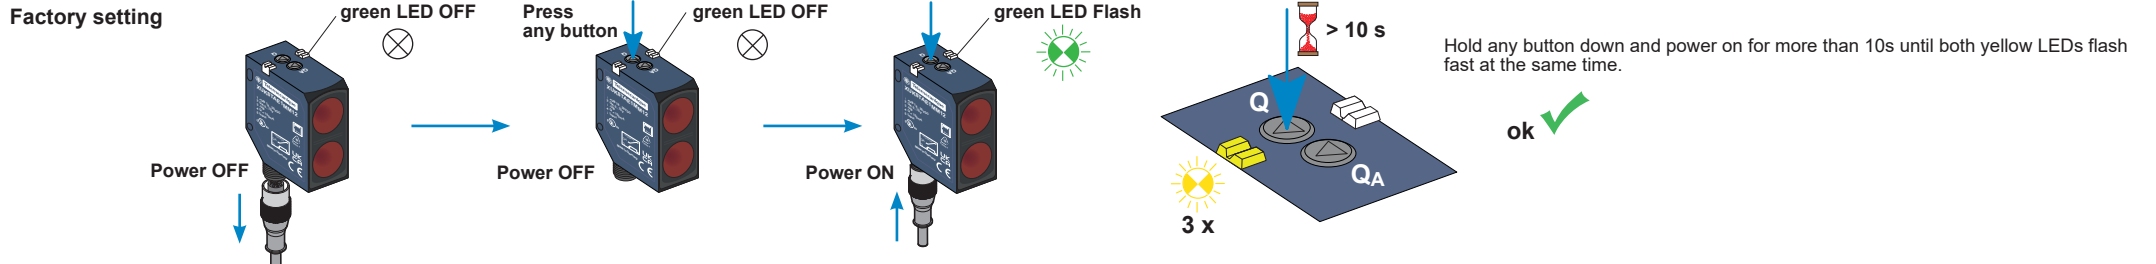


C Switching Output

Step 1: Object position 1

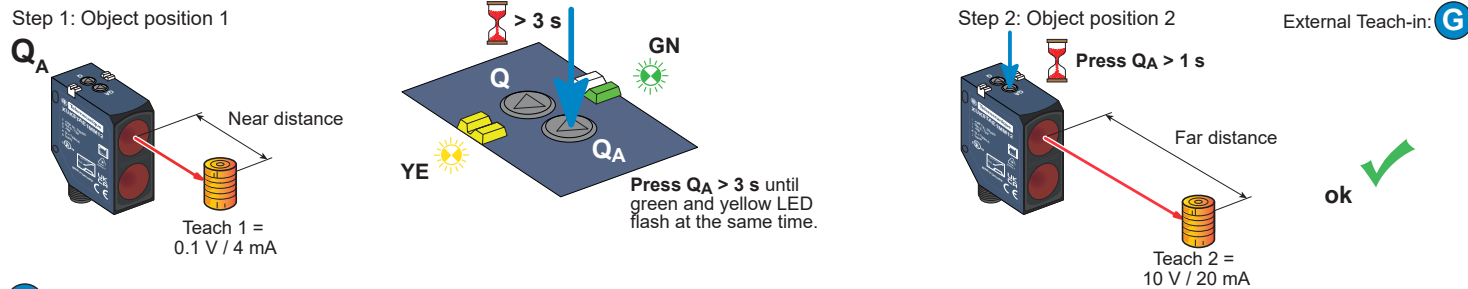


Step 1: Object position 1

Step 1: Object position 1

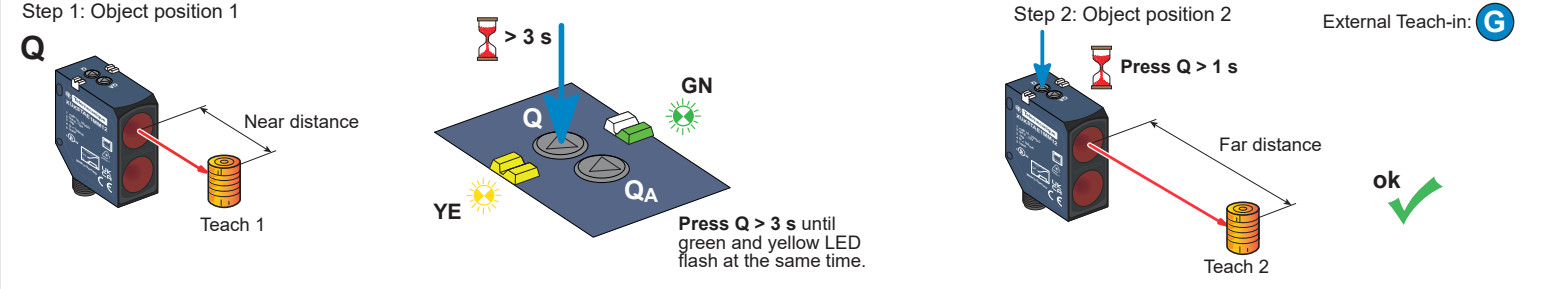

(1) Automatic reflector mode: All non-transparent objects in zone A are reliably detected.
(2) Min. switching window $\pm 80 \text{ mm}$ (3.15 in)

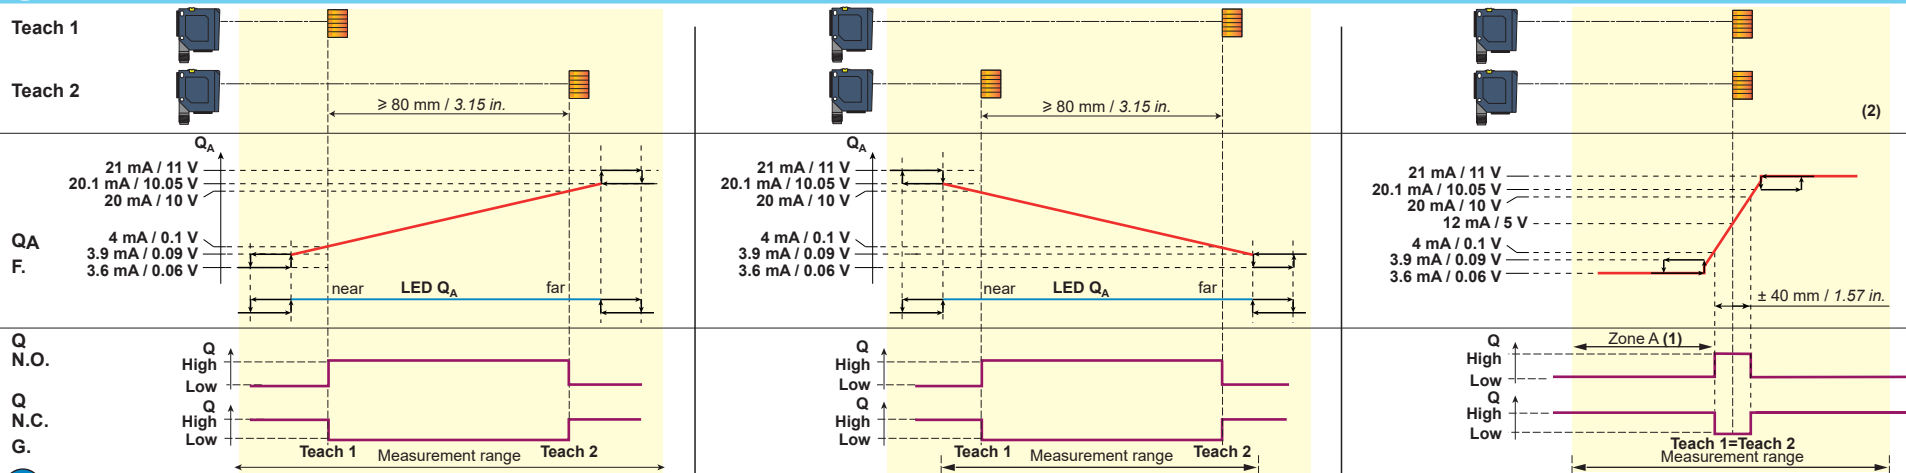


G External Teach-In




Setting via control input IN:
Closing and opening times according to the respective information stated in the overview **A**.

E Switching N.O./N.C./Slope

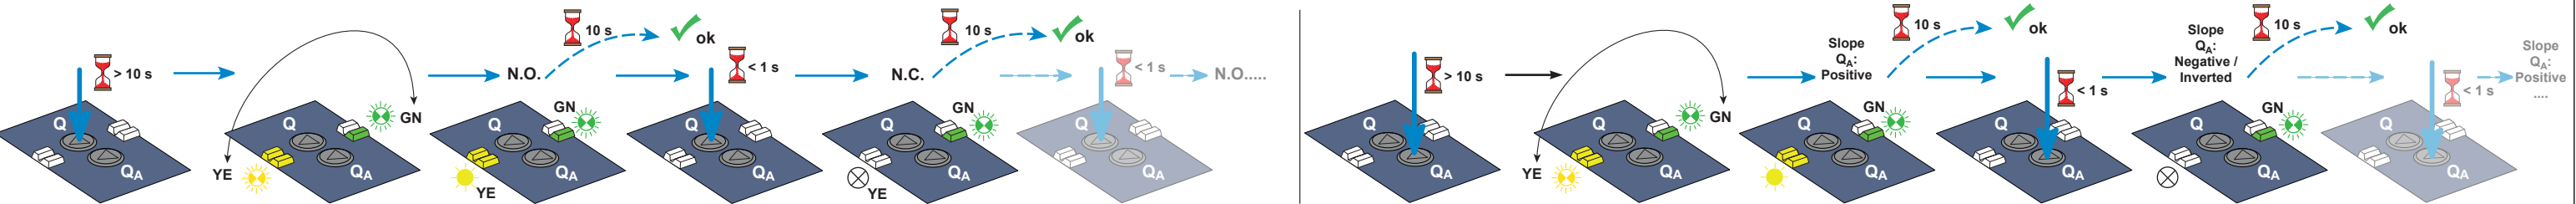

F Switching Auto-detect/NPN/PNP/U/I

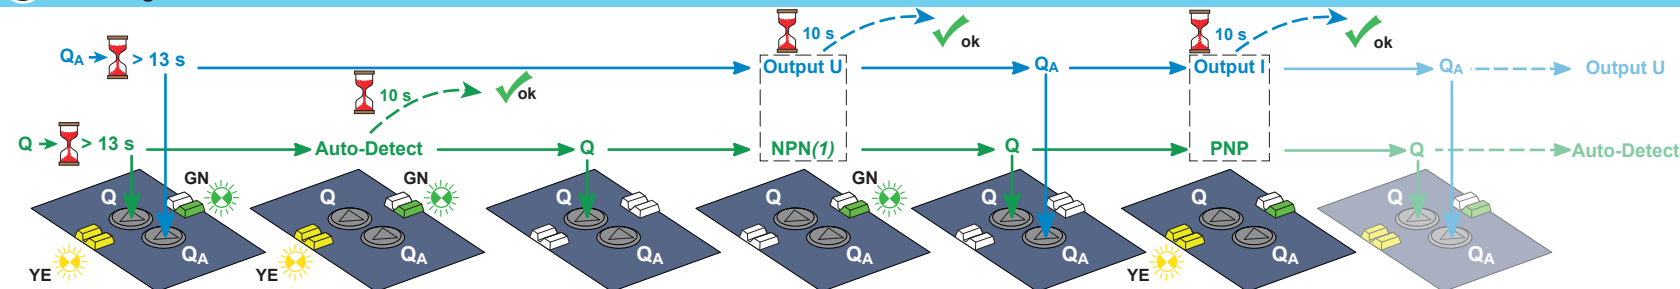

(1):
IO-link is specified for PNP

Press Q > 13 s until green and yellow LED flash at the same time.