

**Use**

It is equipped with 2 buttons for activating Home / Away scenarios. Scenarios can be customized by the Home + Control app. Surface installation with repositionable stickers (supplied) or onto a flush mounting box. Integrated LED for low battery indication. Powered by battery 3V type CR2032 (supplied) with an autonomy of 8 years - 2 modules.

**Standards and approvals**

The undersigned, BTICINO, declares that the radio-electric equipment type (N-NT-L4570CW) complies with directive 2014/53/EU. The full text of the EU declaration of conformity is available on the following website: [www.bticino.it/red](http://www.bticino.it/red)

**Range**

**Designation**

Home / Away wireless control, with battery. Equipped with an LED indicator (configuration) and a RESET button (hidden) used to return to factory settings. Repositionable self-adhesive fixings supplied.

**Cat. Nos.**

- N4570CW
- NT4570CW
- L4570CW

**Colours code:**

- White
- Silver
- Anthracite

**Technical characteristics**

**- Mechanical characteristics**

Protection against impacts: IK 02  
 Protection against solid bodies/liquids: IP 20 without plate and rocker plate

**- Material characteristics**

Mechanism with grid: Fibreglass-reinforced (10%) PC  
 Mechanism functional cover: PC/ABS  
 Supporting base: fiberglass-reinforced PA (60%).

Halogen-free  
 UV resistant

Self-extinguishing: 650°C/30 s


**- Electrical characteristics**

Powered by a CR2032 - 3 V lithium battery (supplied)  
 Battery life: 8 years for 10 activations a day  
**ZigBee radio technology** frequency: 2.4 GHz to 2.4835 GHz  
 Wireless mesh network, self-adaptive and secure (AES 128), conforming to standard IEEE 802.15.4 (LR-WPAN)  
 Power level: < 100 mW

**- Climate characteristics**

Usage temperature: +5° C to +45° C  
 Storage temperature: 0° C to +45°


**Dimensions (mm)**

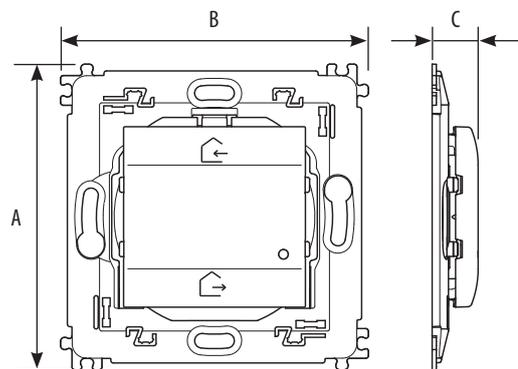


A	B	C
74	74	11

## Operation

Front view

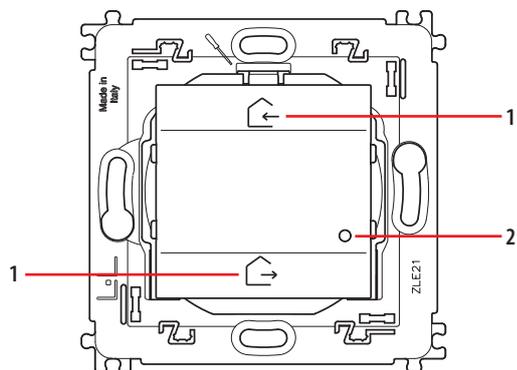

Front view without coverkey

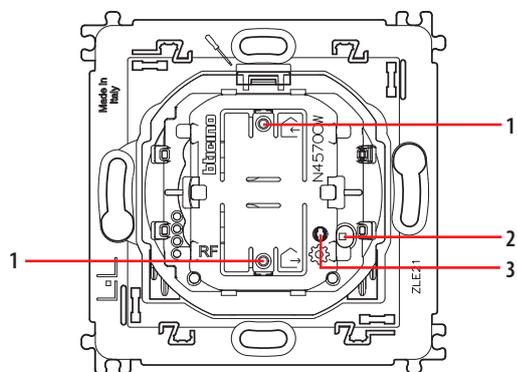

## Legend

1. Control pushbutton
2. LED indicator: useful during installation
3. RESET button used to return to factory settings

## Care

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

**Caution: Always test before using special cleaning products.**

The plates must not be painted.



Take care to recycle the battery appropriately.

RAEE/WEEE: [bticino.com/disposal](http://bticino.com/disposal)