

Megatiker M3 125 thermal magnetic circuit breakers and MS3 125 switch disconnectors

Reference(s) :

T7303F16/20/25/32/40/50/63/80/100/125; T7304F16/20/25/32/40/50/63/80/100/125;
T7303N16/20/25/32/40/50/63/80/100/125; T7304N16/20/25/32/40/50/63/80/100/125;
T7303H16/20/25/32/40/50/63/80/100/125; T7304H16/20/25/32/40/50/63/80/100/125;
T7303L16/20/25/32/40/50/63/80/100/125; T7304L16/20/25/32/40/50/63/80/100/125;
T7303S125; T7304S125



CONTENTS

PAGES

1. USE	1
2. RANGE	1
3. DIMENSIONS AND WEIGHTS	1
4. OVERVIEW	4
5. ELECTRICAL CONNECTIONS	4
6. ELECTRICAL AND MECHANICAL CHARACTERISTICS	6
7. CONFORMITY	8
8. EQUIPMENTS AND ACCESSORIES	9
9. CURVES	11

1. USE

Megatiker platform has been developed to give a new solution of protection devices for a more precise approach in power installations in order to offer the correct answer for different project needs.

Megatiker M3 platform provide a complete project approach in premium market segment, offering a range completely suitable for high power application with high performance breakers in compact dimensions and at a competitive costs.

2. RANGE

Circuit breakers

Megatiker M3 125								
	36 kA		50 kA		70 kA		100 kA	
I _n (A)	3P	4P	3P	4P	3P	4P	3P	4P
16	T7303F16	T7304F16	T7303N16	T7304N16	T7303H16	T7304H16	T7303L16	T7304L16
20	T7303F20	T7304F20	T7303N20	T7304N20	T7303H20	T7304H20	T7303L20	T7304L20
25	T7303F25	T7304F25	T7303N25	T7304N25	T7303H25	T7304H25	T7303L25	T7304L25
32	T7303F32	T7304F32	T7303N32	T7304N32	T7303H32	T7304H32	T7303L32	T7304L32
40	T7303F40	T7304F40	T7303N40	T7304N40	T7303H40	T7304H40	T7303L40	T7304L40
50	T7303F50	T7304F50	T7303N50	T7304N50	T7303H50	T7304H50	T7303L50	T7304L50
63	T7303F63	T7304F63	T7303N63	T7304N63	T7303H63	T7304H63	T7303L63	T7304L63
80	T7303F80	T7304F80	T7303N80	T7304N80	T7303H80	T7304H80	T7303L80	T7304L80
100	T7303F100	T7304F100	T7303N100	T7304N100	T7303H100	T7304H100	T7303L100	T7304L100
125	T7303F125	T7304F125	T7303N125	T7304N125	T7303H125	T7304H125	T7303L125	T7304L125


Switch disconnectors

Megatiker MS3 125		
I _n (A)	3P	4P
125	T7303S125	T7304S125


3. DIMENSIONS AND WEIGHTS

3.1 Dimensions

Lateral view

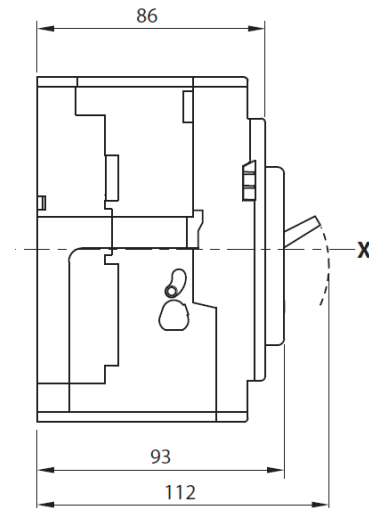

Frontal view (3 and 4 poles)

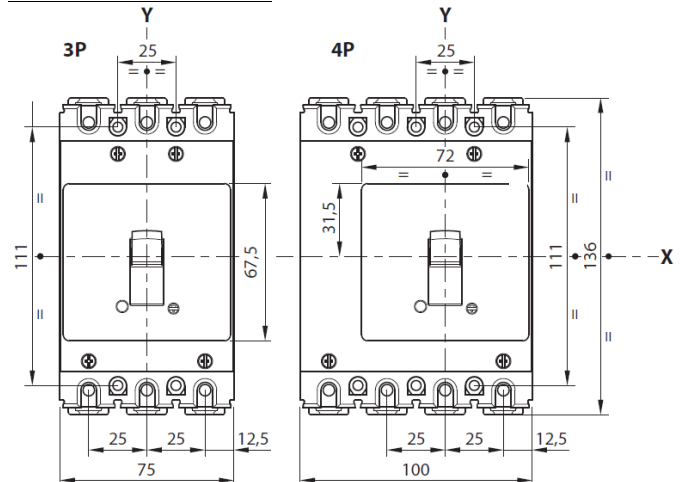



Megatiker M3 125 thermal magnetic circuit breakers and MS3 125 switch disconnectors

Reference(s) :




T7303F16/20/25/32/40/50/63/80/100/125; T7304F16/20/25/32/40/50/63/80/100/125;
T7303N16/20/25/32/40/50/63/80/100/125; T7304N16/20/25/32/40/50/63/80/100/125;
T7303H16/20/25/32/40/50/63/80/100/125; T7304H16/20/25/32/40/50/63/80/100/125;
T7303L16/20/25/32/40/50/63/80/100/125; T7304L16/20/25/32/40/50/63/80/100/125;
T7303S125; T7304S125

Interlock

(for rear plate interlock dimension, see relative instruction sheet)

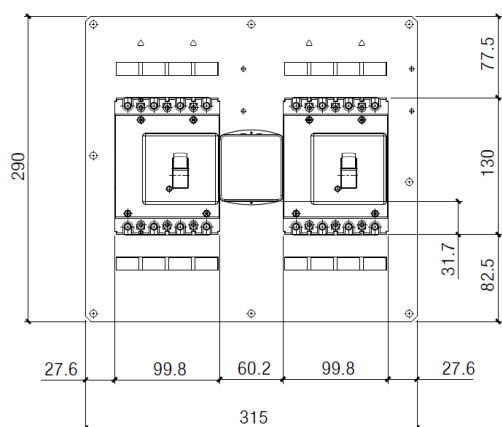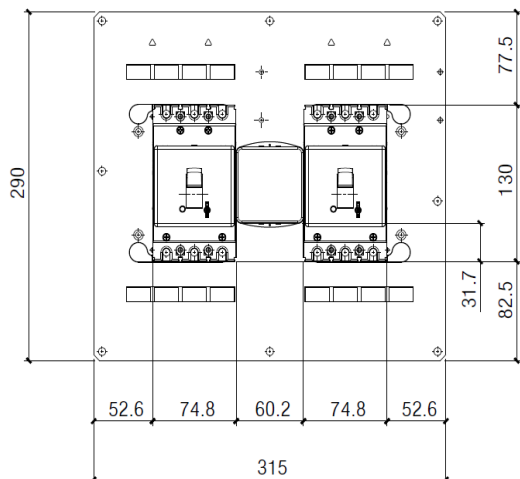

Direct rotary handle

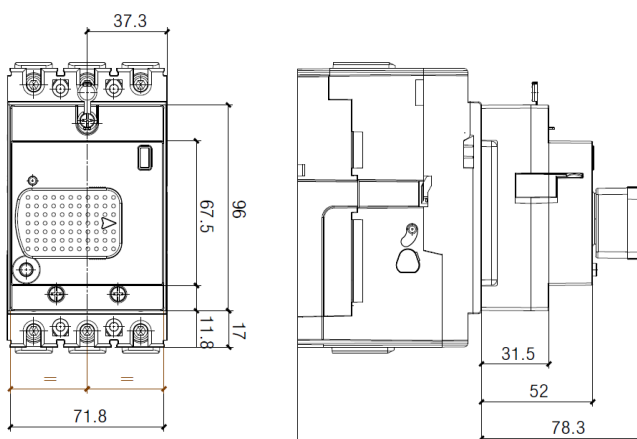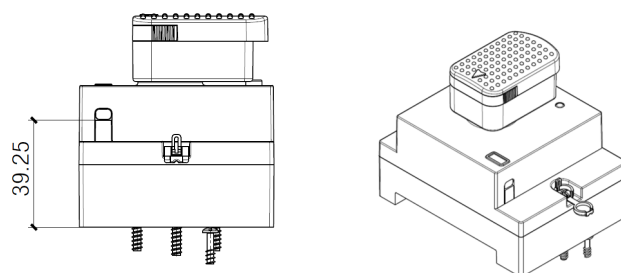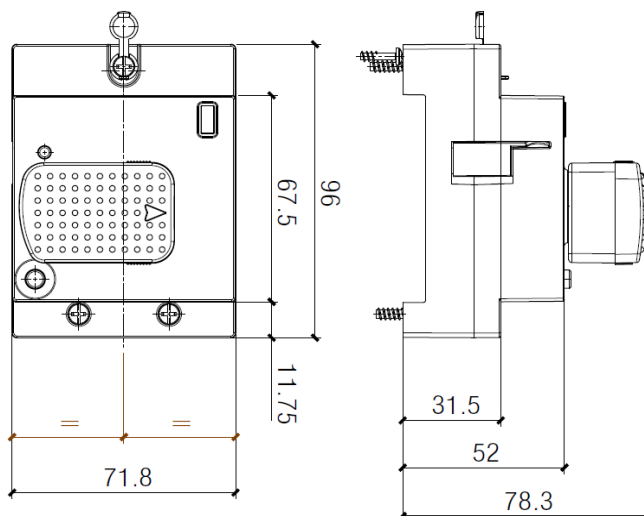


Megatiker M3 125 thermal magnetic circuit breakers and MS3 125 switch disconnectors


Reference(s) :

T7303F16/20/25/32/40/50/63/80/100/125; T7304F16/20/25/32/40/50/63/80/100/125;
T7303N16/20/25/32/40/50/63/80/100/125; T7304N16/20/25/32/40/50/63/80/100/125;
T7303H16/20/25/32/40/50/63/80/100/125; T7304H16/20/25/32/40/50/63/80/100/125;
T7303L16/20/25/32/40/50/63/80/100/125; T7304L16/20/25/32/40/50/63/80/100/125;
T7303S125; T7304S125


Vari-depth rotary handle

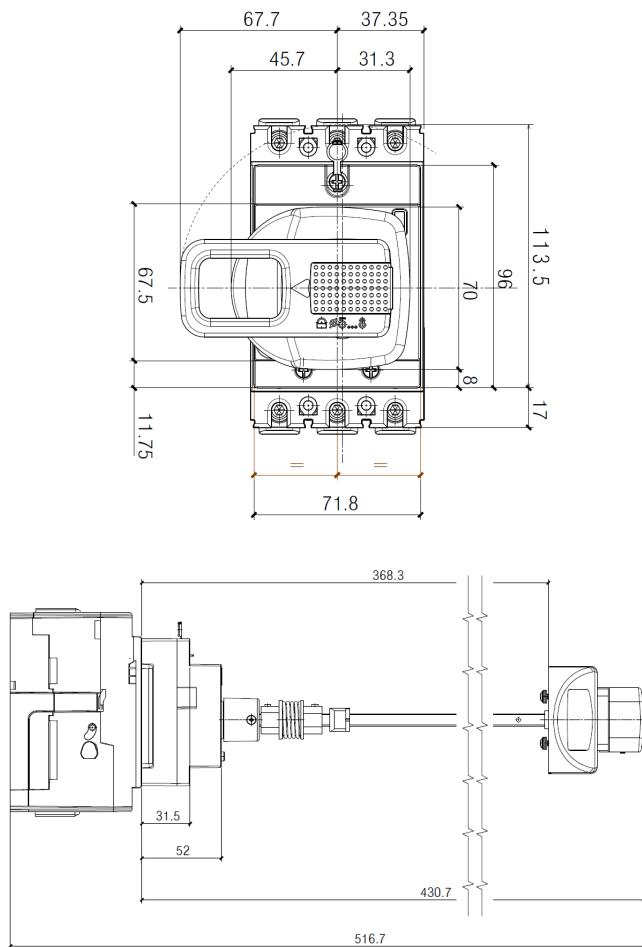


Sealable terminal shields

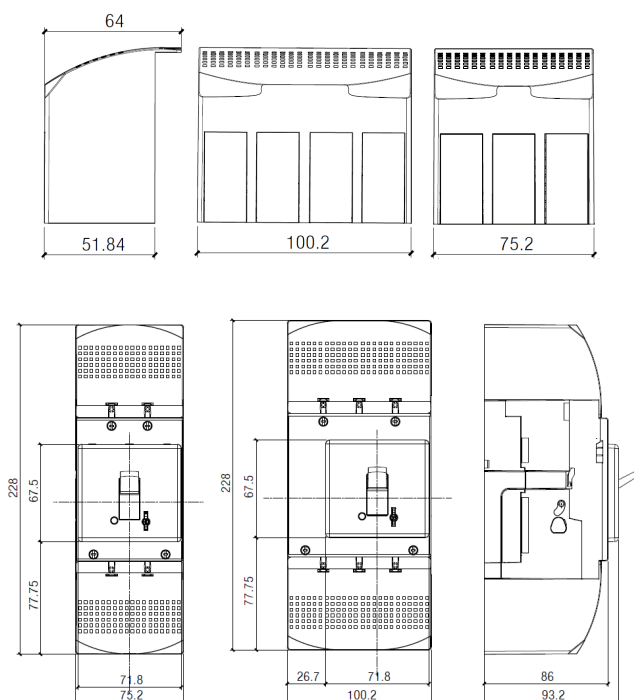

Spreaders

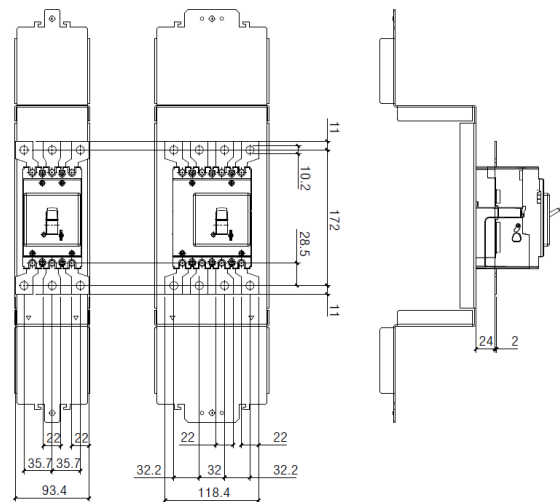

Rear terminals

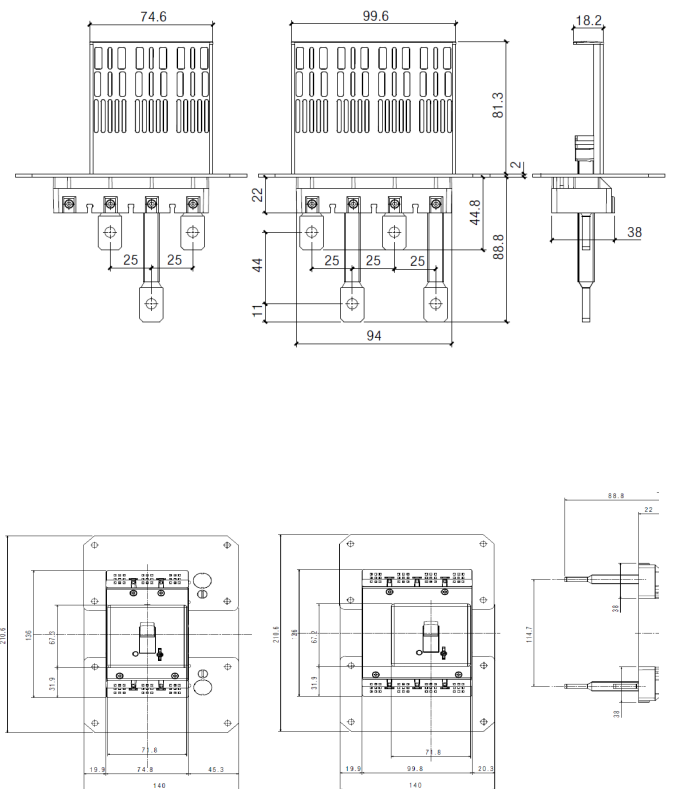

3.2 Weights

Configuration	Weights (Kg)	
	3P	4P
Circuit breaker/switch disconnector	0.95	1.2
Direct rotary handle*	0.18	
Vari depth rotary handle*	0.55	
Interlock*	0.35	
Spreader*	0.135	0.175
* to add to device weight		

4. OVERVIEW

4.1 Supplied with:

- fixing screws (2 for 3P and 4 for 4P)
- screws for connections (6 for 3P and 8 for 4P)
- phase insulators (2 for 3P and 3 for 4P)

5. ELECTRICAL CONNECTIONS



5.1 Mounting possibilities

On plate:


- Vertical
- Horizontal
- Supply inverter type

5.2 Mounting

(see instruction sheet for detailed mounting procedures)

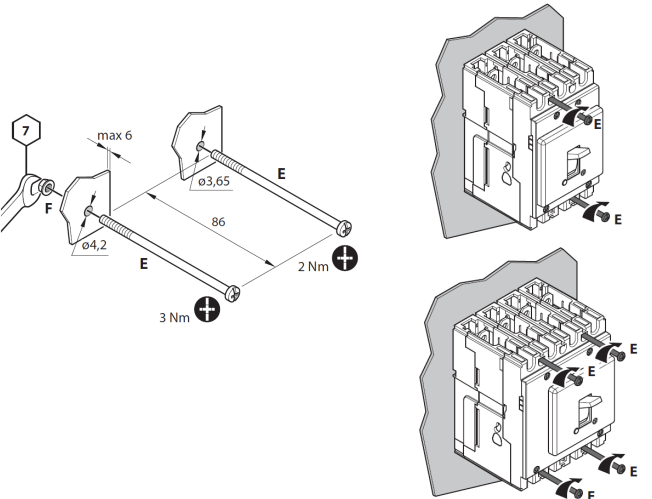
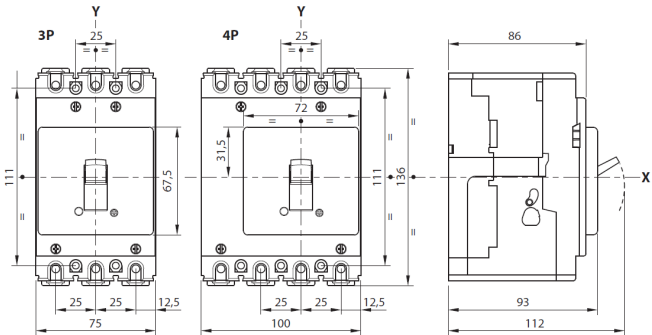


Busbars/cable lugs:


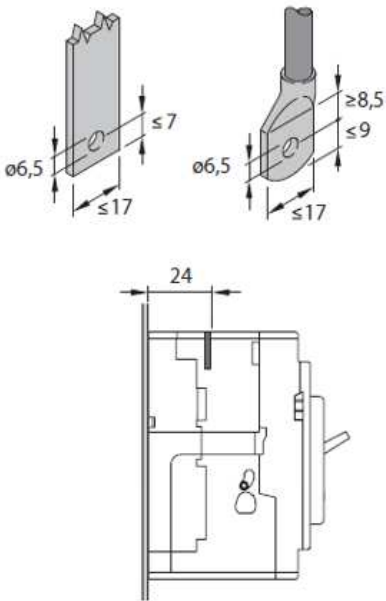


Megatiker M3 125 thermal magnetic circuit breakers and MS3 125 switch disconnectors

Reference(s) :
T7303F16/20/25/32/40/50/63/80/100/125; T7304F16/20/25/32/40/50/63/80/100/125;
T7303N16/20/25/32/40/50/63/80/100/125; T7304N16/20/25/32/40/50/63/80/100/125;
T7303H16/20/25/32/40/50/63/80/100/125; T7304H16/20/25/32/40/50/63/80/100/125;
T7303L16/20/25/32/40/50/63/80/100/125; T7304L16/20/25/32/40/50/63/80/100/125;
T7303S125; T7304S125

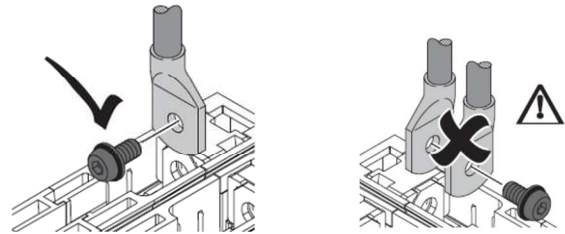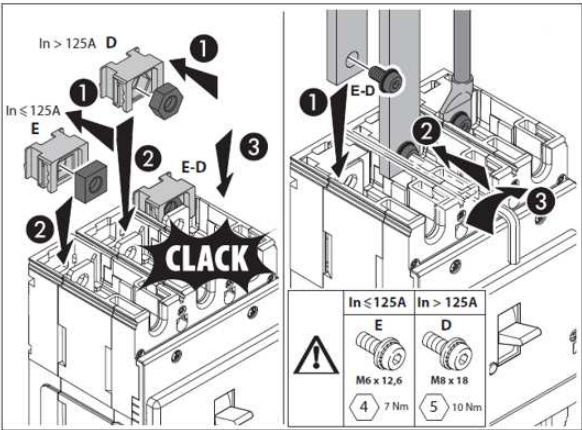

Cables:

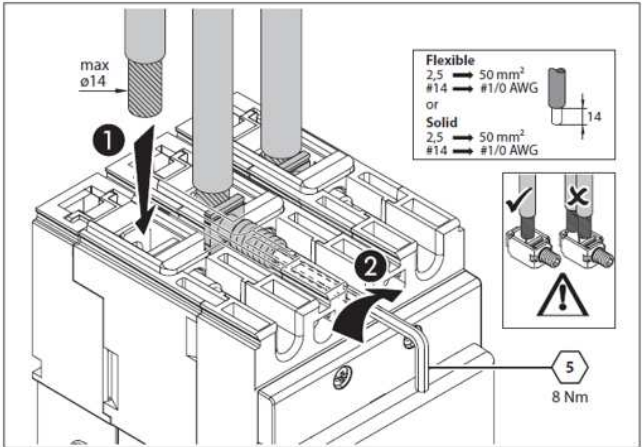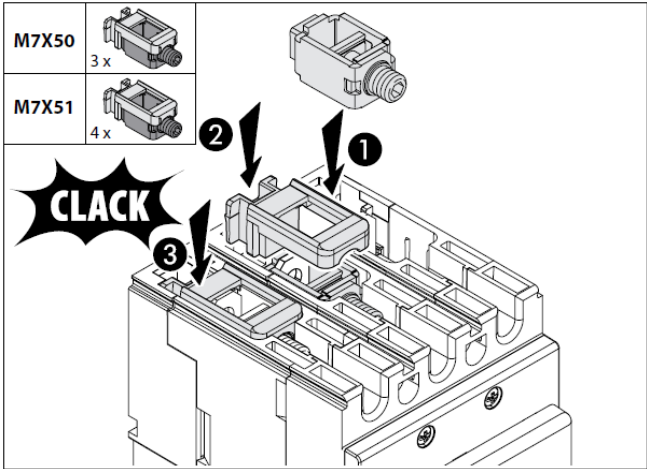

Megatiker M3 125 thermal magnetic circuit breakers and MS3 125 switch disconnectors

Reference(s) :

T7303F16/20/25/32/40/50/63/80/100/125; T7304F16/20/25/32/40/50/63/80/100/125;
T7303N16/20/25/32/40/50/63/80/100/125; T7304N16/20/25/32/40/50/63/80/100/125;
T7303H16/20/25/32/40/50/63/80/100/125; T7304H16/20/25/32/40/50/63/80/100/125;
T7303L16/20/25/32/40/50/63/80/100/125; T7304L16/20/25/32/40/50/63/80/100/125;
T7303S125; T7304S125

6. ELECTRICAL AND MECHANICAL CHARACTERISTICS

Circuit breaker

Circuit Breaker	Megatiker M3 125 F/N/H/L (36kA, 50kA, 70kA, 100kA)
Rated current (A)	16-20-25-32-40-50-63-80-100-125
Poles	3 - 4
Pole pitch (mm)	25
Rated insulation voltage (50/60Hz) U_i (V)	800
Rated operating voltage (50/60Hz) U_o (V)	690
Rated impulse withstand current U_{imp} (kV)	8
Rated frequency (Hz)	50 - 60
Reference ambient temperature(°C)	40 - 50
Operating temperature (°C)	-25 ÷ 70
Mechanical endurance (cycles)	20000
Electrical endurance at I_n (cycles)	8000
Utilization category	A
Suitable for isolation	Yes
Type of protection	Thermal-magnetic
Thermal adjustment I_t	0.8 - 0.9 - 1 x I_n
Magnetic adjustment I_l (A)	400 A up to $I_n=40A$ (not adjustable) 10 x I_n up to $I_n=125A$ (not adjustable)
Neutral protection for 4P (% I_n of phase pole)	100
Dimensions (W x H x D) (mm)	75 x 135 x 86 (3P) 100 x 135 x 86 (4P)

Switch disconnectors

Switch	Megatiker MS3 125
Uninterrupted nominal current I_n (A)	125
Short-time resistive current I_{sw} (kA) for 1s	1.5
Rated short-circuit making capacity I_{cm} (kA)	2.5
Rated insulation voltage U_i (V AC)	800
Maximum rated operating voltage U_o (V AC)	690
Rated impulse withstand voltage U_{imp} (kV)	8
Utilisation category	AC23A
Suitable for isolation	Yes
Nominal frequency (Hz)	50-60
Operating temperature (°C)	-25 ÷ 70
Mechanical endurance (cycles)	20000
Electrical endurance at I_n (cycles)	8000
Dimensions (W x H x D) (mm)	75 x 135 x 86 (3P) 100 x 135 x 86 (4P)


The maximum admissible (absolute) temperature is 125°C (for detail, see IEC 60947-1 and 60947-2).

Megatiker product line has the possibility to supply both in "direct" and "reverse" feed.

If "direct", the word "LINE" needs to be marked on supply terminals (normally the top ones), as well as "LOAD" has to be written on the output terminals to be connected to the load (normally the bottom ones).

If "reverse", any indications about LINE / LOAD are NOT expected on the product.

6.1 Main parts constituting the circuit breaker

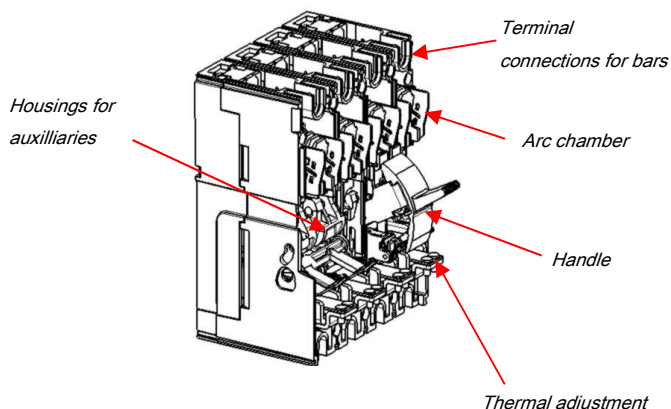

6.2 Breaking capacity (kA)

		Breaking capacity (kA) & I_{cs}			
		3P-4P			
IEC 60947-2	U_e/I_{cu} (I_{cu} letter)	36kA (F)	50kA (N)	70kA (H)	100kA (L)
	240 V AC	70	90	100	150
	415 V AC	36	50	70	100
	500 V AC	12	16	20	25
	690V AC	5	6	10	12
	250 V DC	10	10	10	10
	$I_{cs}(\% I_{cu})$	100	100	100	100
	Rated making capacity under short circuit I_{cm}				
	I_{cm} (kA) at 415V	76.5	105	154	220
	240 V AC	70	90	100	150
NEMA AB-1	500 V AC	12	16	20	25
	690 V AC	5	6	10	12

6.3 Rated current (I_n) at 40°C / 50°C

I_n (A)	Phases limit trip current			
	thermal (I_t)		magnetic (I_l)	
	0.8 x I_n	1 x I_n	min	max
16	13	16	400	400
20	16	20	400	400
25	20	25	400	400
32	26	32	400	400
40	32	40	400	400
50	40	50	500	500
63	51	63	630	630
80	64	80	800	800
100	80	100	1000	1000
125	100	125	1250	1250

6.4 Load operations

Force on handle	N
Opening operation	40
Closing operation	40
Restore operation	53

6.5 Electrodynamic forces

The table below shows an indication of suggested distances to keep between the breaker and the first fixing point of the conductor and bars in order to reduce the effects of the electrodynamic stresses that may be created during a short circuit. In the realization of anchorage system it is recommend the use of isolators suitable for the type of conductor used and the operating voltage.

Megatiker M3 125 thermal magnetic circuit breakers and MS3 125 switch disconnectors

Reference(s) :

T7303F16/20/25/32/40/50/63/80/100/125; T7304F16/20/25/32/40/50/63/80/100/125;
T7303N16/20/25/32/40/50/63/80/100/125; T7304N16/20/25/32/40/50/63/80/100/125;
T7303H16/20/25/32/40/50/63/80/100/125; T7304H16/20/25/32/40/50/63/80/100/125;
T7303L16/20/25/32/40/50/63/80/100/125; T7304L16/20/25/32/40/50/63/80/100/125;
T7303S125; T7304S125

I _{cc} (kA)	Maximum Distance (mm)
36	350
50	300
70	250
100	200

According to conductor type and bar system (except Legrand bar kits), the choice of the distance to keep is to be calibrated by the installer.
Also installer must take into account the weight of the conductors so that this does not affect the electrical junction between the conductor itself and the connection point.

6.6 Power losses per pole under I_n

Circuit breaker (I_{cu} ≤ 50kA)

	Power losses per pole (W)									
I _n (A)	16	20	25	32	40	50	63	80	100	125
Lugs	3.46	4.80	7.50	2.92	4.32	6.75	6.37	6.02	9.40	9.69
Spreaders	3.48	4.84	7.56	3.02	4.48	7.00	6.77	6.66	10.40	11.25
Rear terminals	3.55	4.94	7.72	3.28	4.88	7.63	7.76	8.26	12.90	15.16

Circuit breaker (I_{cu} > 50kA)

	Power losses per pole (W)									
I _n (A)	16	20	25	32	40	50	63	80	100	125
Lugs	3.51	4.89	7.64	3.15	4.69	7.33	7.28	7.49	11.70	13.28
Spreaders	3.54	4.93	7.71	3.26	4.85	7.58	7.68	8.13	12.70	14.84
Rear terminals	3.60	5.03	7.86	3.51	5.25	8.20	8.67	9.73	15.20	18.75

Note: power losses in the table above are referred and measured as described in the standard IEC 60947-2 (Annex G) for circuit-breakers. Values in the table are referred to a single phase.

Switch disconnectors

	Power losses per pole (W)
I _n (A)	
125	
Lugs	7.81
Spreaders	9.38
Rear terminals	13.28

Note: power loss in the table above are referred and measured as described in the standard IEC 60947-3 for switches. Values in the table are referred to a single phase.

6.7 DERATINGS

according to IEC/EN 60947-1

6.6.1 Temperature

Rated current and his adjustment has to be considered relating to a rise or fall of ambient temperature and to a different version or installation conditions. The table below indicates the maximum long-time (LT) protection setting depending on the ambient temperature.

	Temperature Ta (°C)										
I _n (A)	-20	-10	-5	0	10	20	30	40	50	60	70
16	20	20	19	19	18	17	17	16	16	15	14
20	25	24	24	23	23	21	21	20	20	18	17
25	31	30	30	29	28	27	26	25	25	23	22
32	40	39	38	37	36	35	33	32	32	29	28
40	50	49	48	47	45	43	42	40	40	37	35
50	62	61	59	58	56	54	52	50	50	45	43
63	79	77	75	74	71	68	65	63	63	57	54
80	100	97	95	93	90	86	83	80	80	73	69
100	125	121	119	117	112	108	104	100	100	91	86
125	157	151	148	146	140	135	130	125	125	114	108

For derating temperature with other configurations, see table A.

6.7.2 Specific condition use

Climatic conditions

according to IEC/EN 60947-1 Annex Q, Cat. F subject to temperature, humidity, vibration, shock and salt mist.

Pollution degree

for Megatiker M3 125 circuit breakers, degree 3, according to IEC/EN 60947-2

6.7.3 Altitude

Altitude derating for Megatiker M3 circuit breakers and switch disconnectors

Altitude (m)	2000	3000	4000	5000
U _e (V)	690	590	520	460
I _n (A) (T _a = 40°C/50°C)	1 x I _n	0.98 x I _n	0.93 x I _n	0.9 x I _n

6.7.4 Use in DC

See table B.

Megatiker M3 125 thermal magnetic circuit breakers and MS3 125 switch disconnectors

Reference(s) :

T7303F16/20/25/32/40/50/63/80/100/125; T7304F16/20/25/32/40/50/63/80/100/125;
T7303N16/20/25/32/40/50/63/80/100/125; T7304N16/20/25/32/40/50/63/80/100/125;
T7303H16/20/25/32/40/50/63/80/100/125; T7304H16/20/25/32/40/50/63/80/100/125;
T7303L16/20/25/32/40/50/63/80/100/125; T7304L16/20/25/32/40/50/63/80/100/125;
T7303S125; T7304S125

7. CONFORMITY

Megatiker M3 range of product concerning circuit-breakers and switch-disconnectors exceed compliance with the IEC/EN standard 60947-2 and 60947-3 respectively. Certification available by IECEE CB-scheme or LOVAG Compliance scheme.

Megatiker M3 respect the European Directives REACH, RoHS, RAEE.


For specific information, please contact Legrand support.

7.1 Marking

Product (both circuit breakers and switch disconnectors) are provided with labelling in full conformity to the referred standard and directives requirements by laser or sticker labels (for illustrative purposes only) as:

Product laser label on front

- Manufacturer responsible
- Denomination, type product, code
- Standard conformity
- Standard characteristics declared
- Coloured identification of I_{cu} at 415V

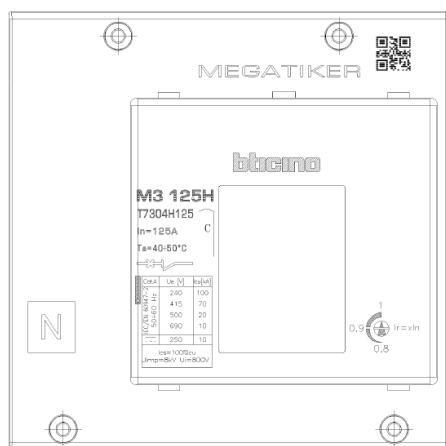

Product sticker label on side


- Manufacturer responsible
- Denomination and type product
- Standard conformity
- Mark/Licence (if any)
- Directive requirements
- Bar code identification product
- Manufacturing Country



Mark sticker label on side


- Product code
- Mark/Licence (if any)
- Country deviation, if any

T7304H125

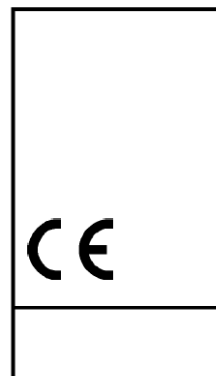

Packaging sticker label

- Manufacturer responsible
- Denomination and type product
- Mark/Licence (if any)
- Directive requirements
- Bar code identification product

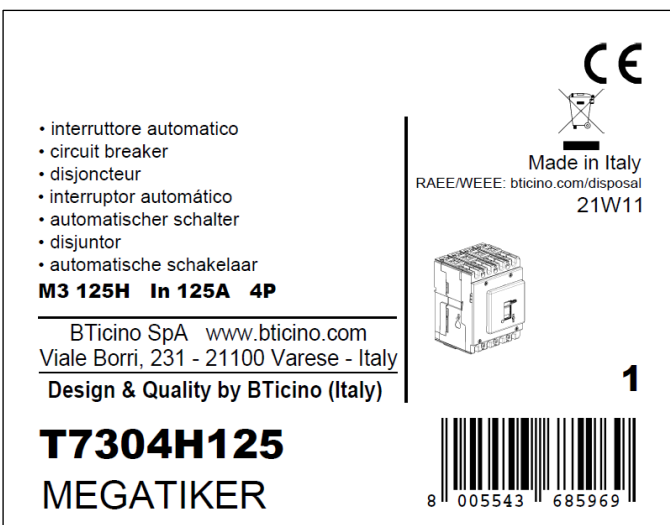

Megatiker M3 125 thermal magnetic circuit breakers and MS3 125 switch disconnectors

Reference(s) :

T7303F16/20/25/32/40/50/63/80/100/125; T7304F16/20/25/32/40/50/63/80/100/125;
T7303N16/20/25/32/40/50/63/80/100/125; T7304N16/20/25/32/40/50/63/80/100/125;
T7303H16/20/25/32/40/50/63/80/100/125; T7304H16/20/25/32/40/50/63/80/100/125;
T7303L16/20/25/32/40/50/63/80/100/125; T7304L16/20/25/32/40/50/63/80/100/125;
T7303S125; T7304S125

8. EQUIPMENTS AND ACCESSORIES

8.1 Releases (for Megatiker M3 125/250, M1 and M2)

- shunt releases with voltage:

12 Vac and dc
24 Vac and dc
48 Vac and dc
110÷130 Vac
220÷277 Vac
380÷480 Vac

ref. M7S012
ref. M7S024
ref. M7S048
ref. M7S110
ref. M7S230
ref. M7S415

Maximum power = 400 VA / W

- undervoltage releases with voltage:

12 Vac and dc
24 Vac and dc
48 Vac and dc
110÷130 Vac and dc
220÷240 Vac
277 Vac
380÷415 Vac
440÷480 Vac

ref. M7U012
ref. M7U024
ref. M7U048
ref. M7U110
ref. M7U230
ref. M7U277
ref. M7U415
ref. M7U480

Maximum power = 4 VA

Circuit breaker opening time < 50 ms

UVR releases can be used on Megatiker M3 125/250 starting from batch 19W15

- time-lag undervoltage releases (800 ms)

Time-lag modules with voltage:

230 V ac
400 V ac

ref. M7000MR/230
ref. M7000MR/400

Release

ref. M7UEM

(to be equipped with a time-lag module M7000MR/230 and M7000MR/400)

8.2 Auxiliary contacts

(for Megatiker M3 125/250, M1 and M2)

Changeover switch 3A – 250 VAC

ref. M7X01





To show the state of the contacts or opening of the Megatiker M1/M2 and Megatiker M3 125/250 on a fault:

- Auxiliary contact (standard) OC
- Fault signal CTR

Auxiliary contact electrical characteristics		
Rated voltage (V _n)	V (ac or dc)	24 to 250
Intensity (A)	24 V dc	5
	48 V dc	1.7
	110 V dc	0.5
	230 V dc	0.25
	110 V ac	4
	230/250 V ac	3

Configurations:

Megatiker M3 125 → 1 auxiliary contacts + 1 fault signal

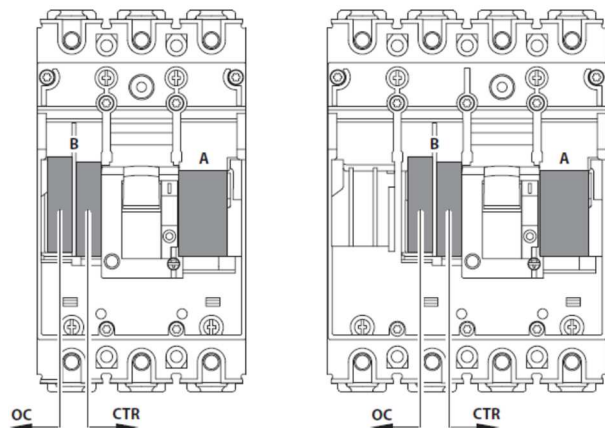

	B	A
UVR	✗	✓
ST	✗	✓
OC/CTR	✓	✗

To get more information on auxiliary mounting procedures, please refer to product instruction sheet.

8.3 Universal keylocks

These keylocks must be used for all the accessories that can be locked:

- rotary handle

For each of these, a specific accessory (indicated in the specific section of this datasheet) must be added in order to get the complete locking kits for the specific application.

- 1 lock + 1 flat key with random mapping ref. M7R24
- 1 lock + 1 flat key with fixed mapping (EL43525) ref. M7R25
- 1 lock + 1 flat key with fixed mapping (EL43363) ref. M7R26
- 1 lock + 1 star key with random mapping ref. M7R27

Megatiker M3 125 thermal magnetic circuit breakers and MS3 125 switch disconnectors

Reference(s) :

T7303F16/20/25/32/40/50/63/80/100/125; T7304F16/20/25/32/40/50/63/80/100/125;
T7303N16/20/25/32/40/50/63/80/100/125; T7304N16/20/25/32/40/50/63/80/100/125;
T7303H16/20/25/32/40/50/63/80/100/125; T7304H16/20/25/32/40/50/63/80/100/125;
T7303L16/20/25/32/40/50/63/80/100/125; T7304L16/20/25/32/40/50/63/80/100/125;
T7303S125; T7304S125

8.4 Rotary handles

Direct on DPX³

- Standard (black) *ref. M7R20*
- For emergency use (red / yellow) *ref. M7R21*

Vari-depth handle IP55 (with auxiliary option)

- Standard (black) *ref. M7R22*
- For emergency use (red / yellow) *ref. M7R24*

Locking accessories (for rotary handle)

- Key lock accessory for vari-depth rotary handle *ref. M7R31*
(*ref. M7R31 is compatible with Megatiker M3 250 also*)

Ref. M7R31 must be used with universal keylocks to get the complete locking kit for rotary handle

8.5 Mechanical accessories

- Padlock (for locking in "OPEN" position) *ref. M7X02*
(*ref. M7X02 is compatible with Megatiker M1/M2 and M3 250*)
- Sealable terminal shields:
 - Set of 2 (for 3P) *ref. M7C20*
 - Set of 3 (for 4P) *ref. M7C21*
- Insulated shields:
 - Set of 2 (for 3P) *ref. M7F01*
 - Set of 3 (for 4P) *ref. M7F02**(ref. M7F01 AND M7F02 are compatible with Megatiker M3 250)*

8.6 Connection accessories

Cage terminals

- Set of 3 terminals for cables 50 mm² max (solid) *ref. M7X50*
or 50 mm² max (flexible) Cu/Al
- Set of 4 terminals for cables 50 mm² max (rigid) *ref. M7X51*
or 50 mm² max (flexible) Cu/Al
- Set of 3 terminals (high capacity) *ref. M7X52*
for cables 70 mm² max for Cu and 95 mm² max for Al
Section relative to maximum current is 70 mm² (for Al)
- Set of 4 terminals (high capacity) *ref. M7X53*
for cables 70 mm² max for Cu and 95 mm² max for Al
Section relative to maximum current is 70 mm² (for Al)

Spreaders (incoming or outgoing):

- Set of 3 (for 3P) *ref. M7A50*
- Set of 4 (for 4P) *ref. M7A51*

Rear terminals (incoming or outgoing):

- Set of 3 (for 3P) *ref. M7A54*
- Set of 4 (for 4P) *ref. M7A55*

Cage terminal use specifications

Megatiker M3 125							
Type of cage terminal	Cable standard suggested cross section (mm ²)*			Dimensions limits of cable for cage terminals			
	In (A)	Cu	Al	MIN cross section (mm ²)		MAX cross section (mm ²)	
				Flexible	Rigid	Flexible	Rigid
Standard	16	2,5	4	2,5	4	70	95
	20	2,5	4				
	25	4	6				
	32	6	10				
	40	10	16				
	50	10	16				
	63	16	25				
	80	25	35				
	100	35	\				
High capacity	125	50	\	35	35	95	120
	80	25	35				
	100	35	50				
	125	50	70				

* The suggested cross section are in compliance with standard IEC60947-1 (ed.6 2020/04) and IEC60947-2 (ed.5.1 2019/07)

8.7 Interlock mechanism

(for interlocking 2 Megatiker M3 125 HP or 2 Megatiker M3 250)


No frame mixing in interlock mechanism

- Interlock mechanism – standard version *ref. M7I01*
(for fixed version Megatiker M3 125 and 250)
- Interlock mechanism – for electronic module *ref. M7I02*
(for fixed version Megatiker M3 125 and 250)
- Interlock plate for Megatiker M3 125 *ref. M7I04*

9. CURVES


9.1.1 Thermal magnetic tripping curve (rated current $I_n \leq 80A$)

Update: 11/06/2019

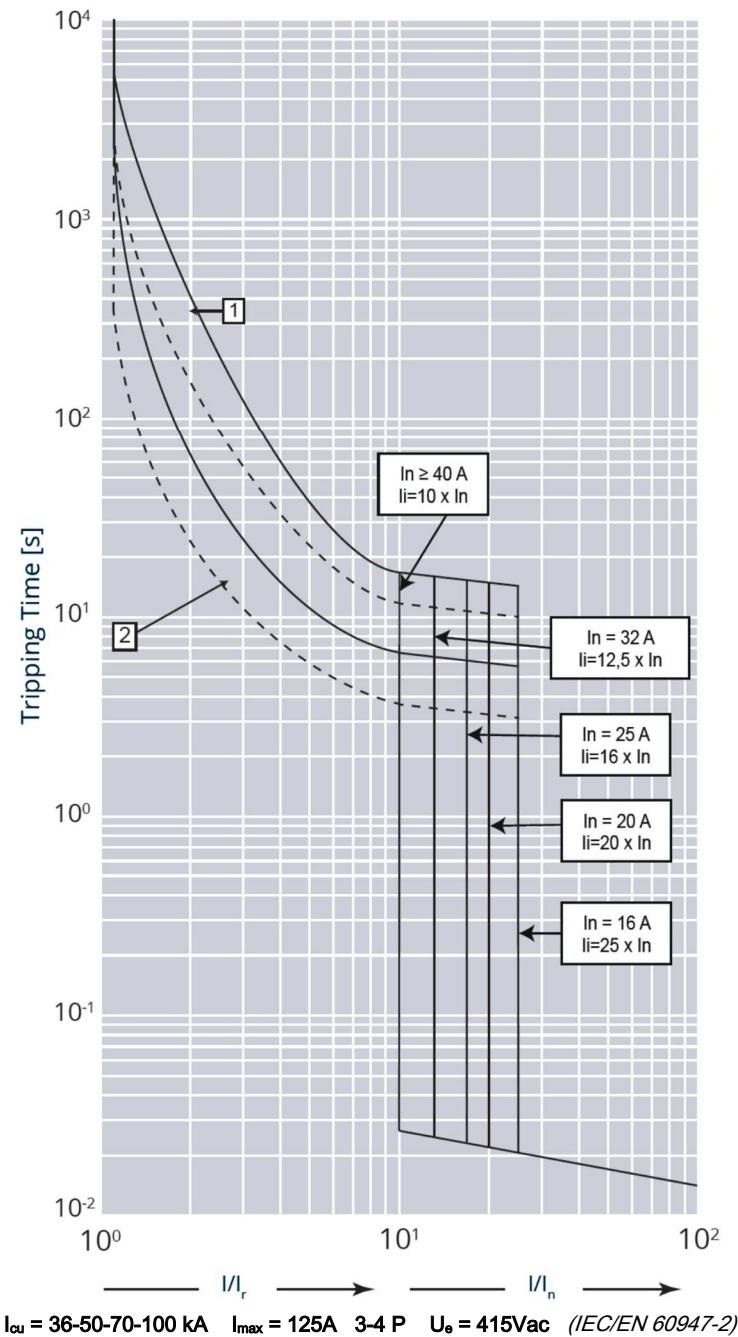

Value	Description
t	time
I	current
I_n	rated current
I_r	long time setting current
curve 1	characteristic with cold start
curve 2	characteristic with hot start


9.1.2 Thermal magnetic tripping curve (rated current $I_n > 80A$)

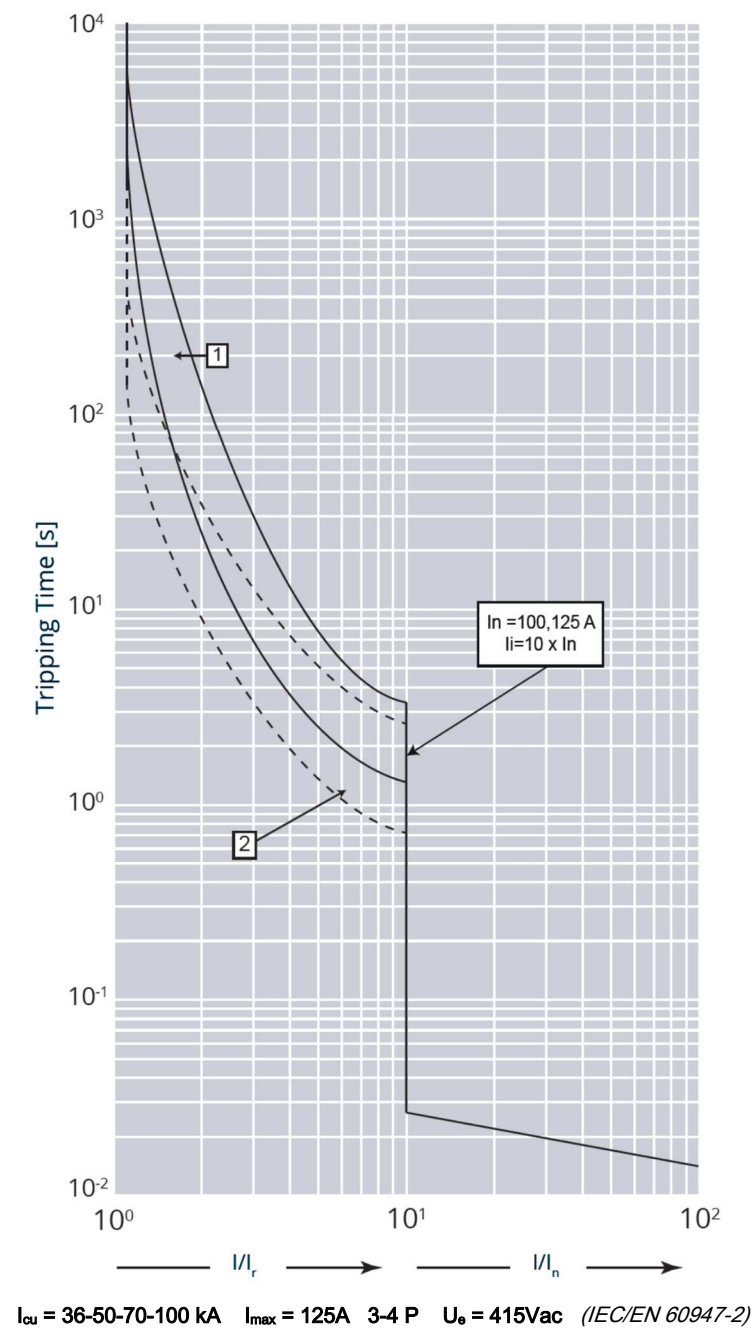

Value	Description
t	time
I	current
I_n	rated current
I_r	long time setting current
curve 1	characteristic with cold start
curve 2	characteristic with hot start

9.2.1 Pass-through specific energy characteristic curve (breaking capacity $I_{cu} \leq 50\text{kA}$)

Update: 04/09/2019

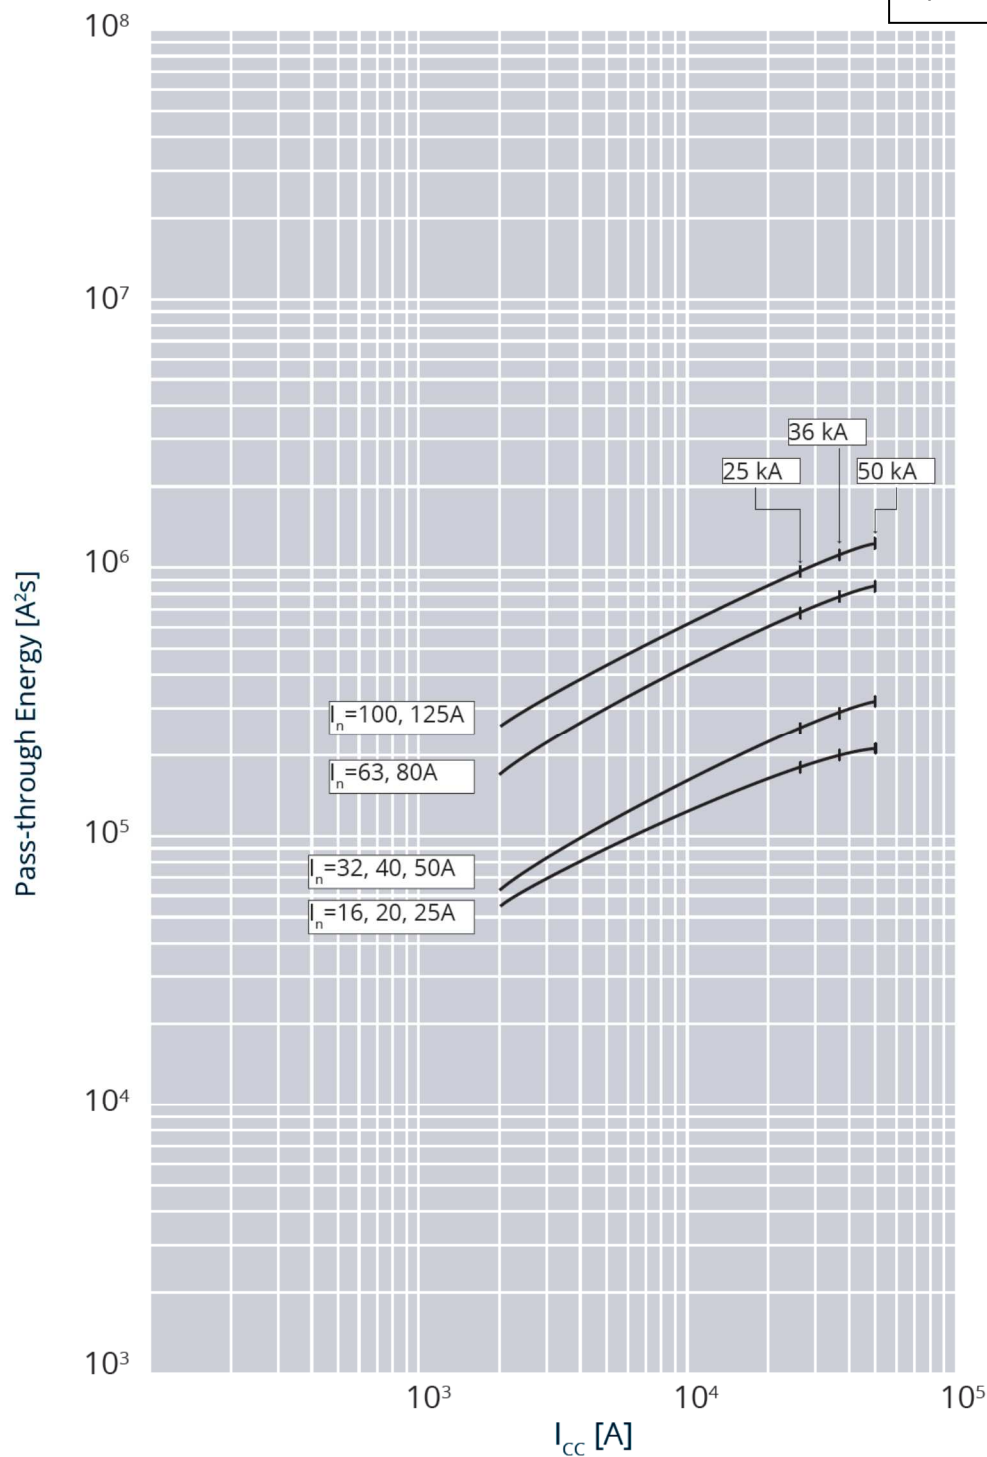


$I_{cu} = 36\text{-}50\text{-}70\text{-}100\text{ kA}$ $I_{max} = 125\text{A}$ 3-4 P $U_o = 415\text{Vac}$ (IEC/EN 60947-2)

Value	Description
I_{cc}	short circuit current
$I^2t\text{ (A}^2\text{s)}$	pass-through specific energy

9.2.2 Pass-through specific energy characteristic curve (breaking capacity $I_{cu} > 50\text{kA}$)

Update: 04/09/2019

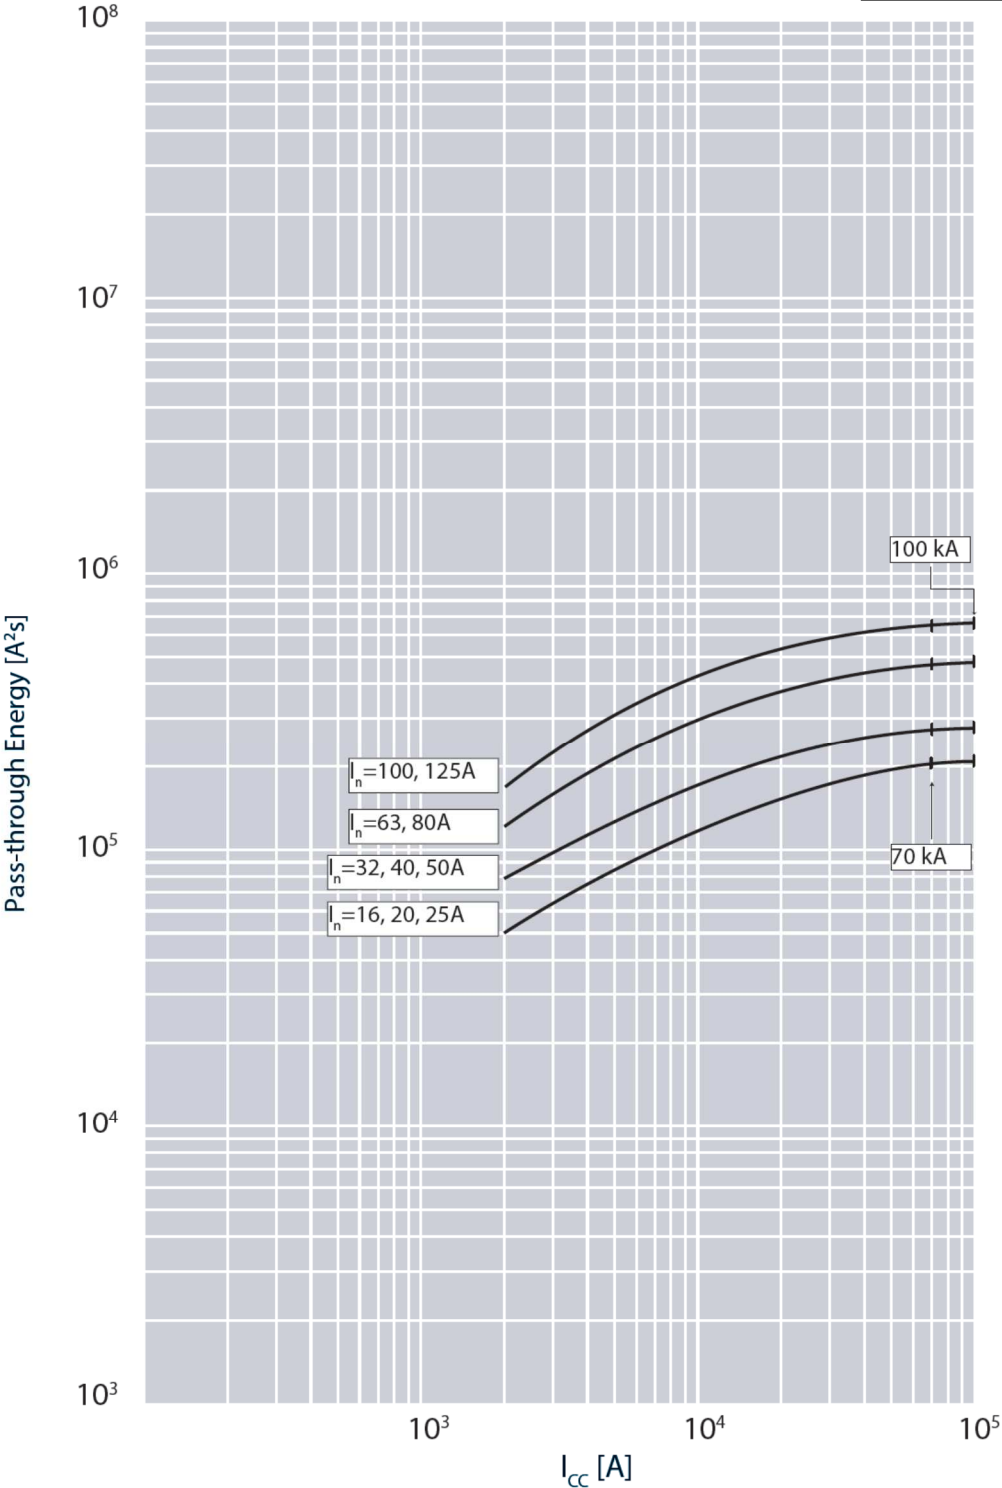

$I_{cu} = 36\text{-}50\text{-}70\text{-}100\text{ kA}$ $I_{max} = 125\text{A}$ 3-4 P $U_o = 415\text{Vac}$ (IEC/EN 60947-2)


Value	Description
I_{cc}	short circuit current
I^2t (A^2s)	pass-through specific energy

Megatiker M3 125 thermal magnetic circuit breakers and MS3 125 switch disconnectors

Reference(s) :
T7303F16/20/25/32/40/50/63/80/100/125; T7304F16/20/25/32/40/50/63/80/100/125;
T7303N16/20/25/32/40/50/63/80/100/125; T7304N16/20/25/32/40/50/63/80/100/125;
T7303H16/20/25/32/40/50/63/80/100/125; T7304H16/20/25/32/40/50/63/80/100/125;
T7303L16/20/25/32/40/50/63/80/100/125; T7304L16/20/25/32/40/50/63/80/100/125;
T7303S125; T7304S125

9.3.1 Cut-off peak current characteristic curve (kA) (breaking capacity $I_{cu} \leq 50\text{kA}$)

Update: 04/02/2020

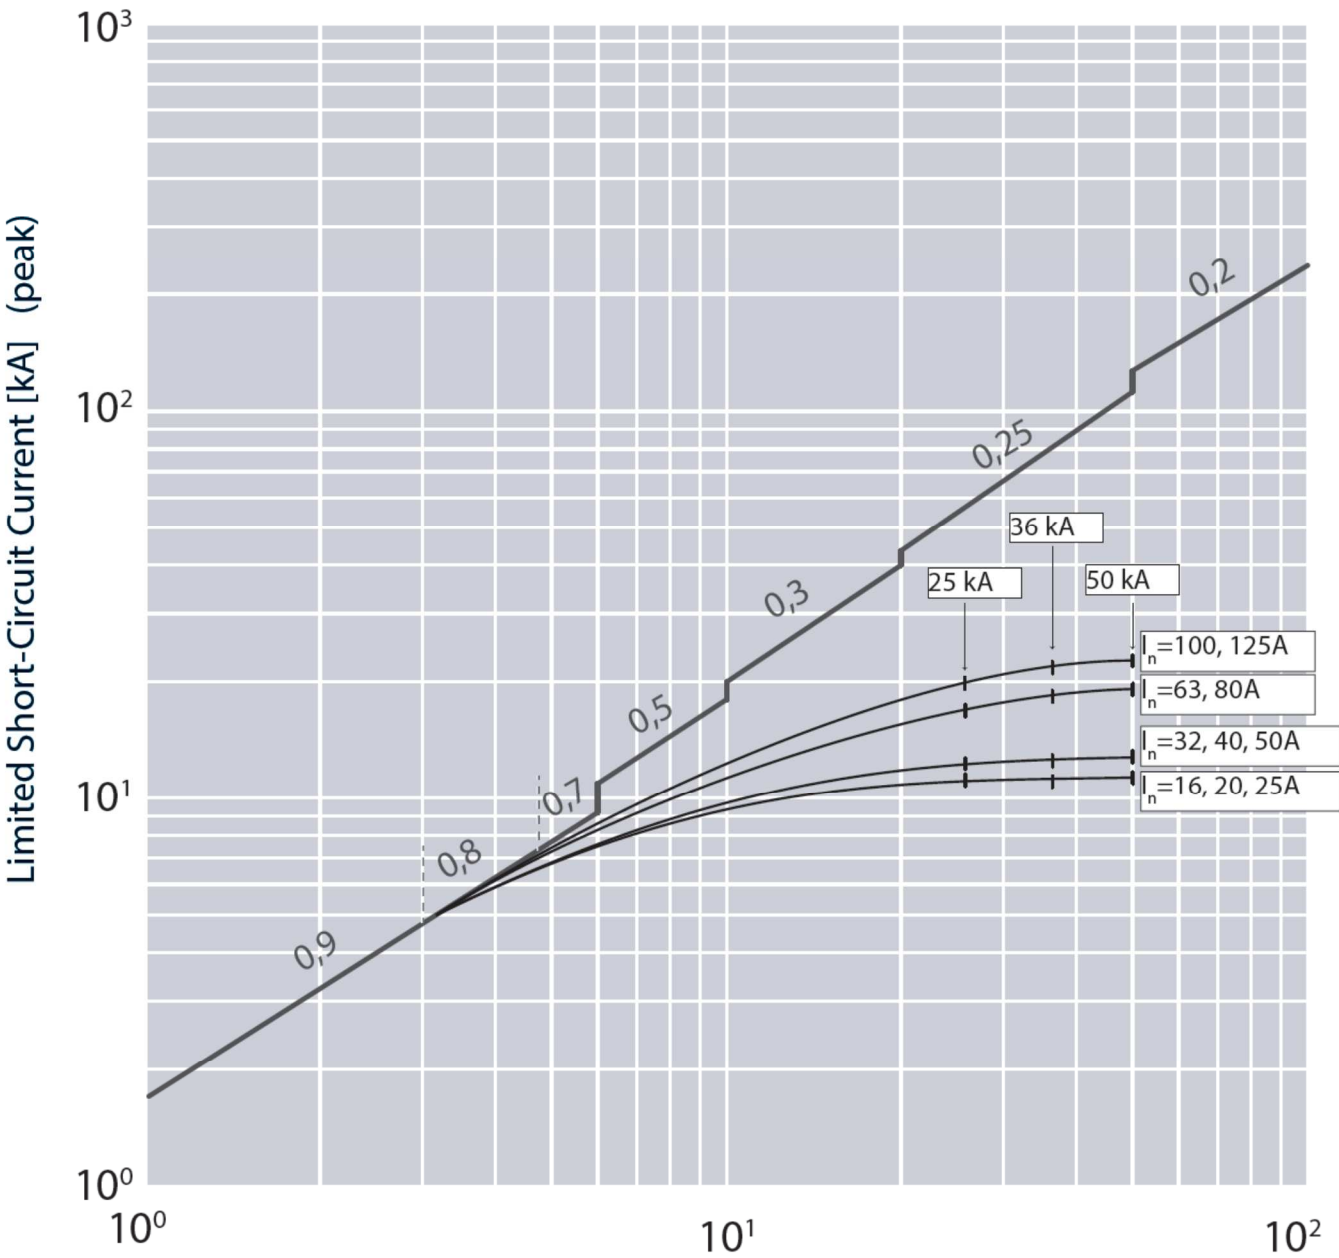

Prospective Fault Current [kA] (RMS)

$I_{cu} = 36\text{-}50\text{-}70\text{-}100\text{ kA}$ $I_{max} = 125\text{A}$ 3-4 P $U_o = 415\text{Vac}$ (IEC/EN 60947-2)


Value	Description
I_{cc}	estimated short circuit symmetrical current (RMS value)
I_p	maximum short circuit peak current
	maximum prospective short circuit peak current corresponding at the power factor
	maximum real peak short circuit current

Megatiker M3 125 thermal magnetic circuit breakers and MS3 125 switch disconnectors

Reference(s) :
T7303F16/20/25/32/40/50/63/80/100/125; T7304F16/20/25/32/40/50/63/80/100/125;
T7303N16/20/25/32/40/50/63/80/100/125; T7304N16/20/25/32/40/50/63/80/100/125;
T7303H16/20/25/32/40/50/63/80/100/125; T7304H16/20/25/32/40/50/63/80/100/125;
T7303L16/20/25/32/40/50/63/80/100/125; T7304L16/20/25/32/40/50/63/80/100/125;
T7303S125; T7304S125

9.3.2 Cut-off peak current characteristic curve (kA) (breaking capacity $I_{cu} > 50\text{kA}$)

Update: 04/02/2020

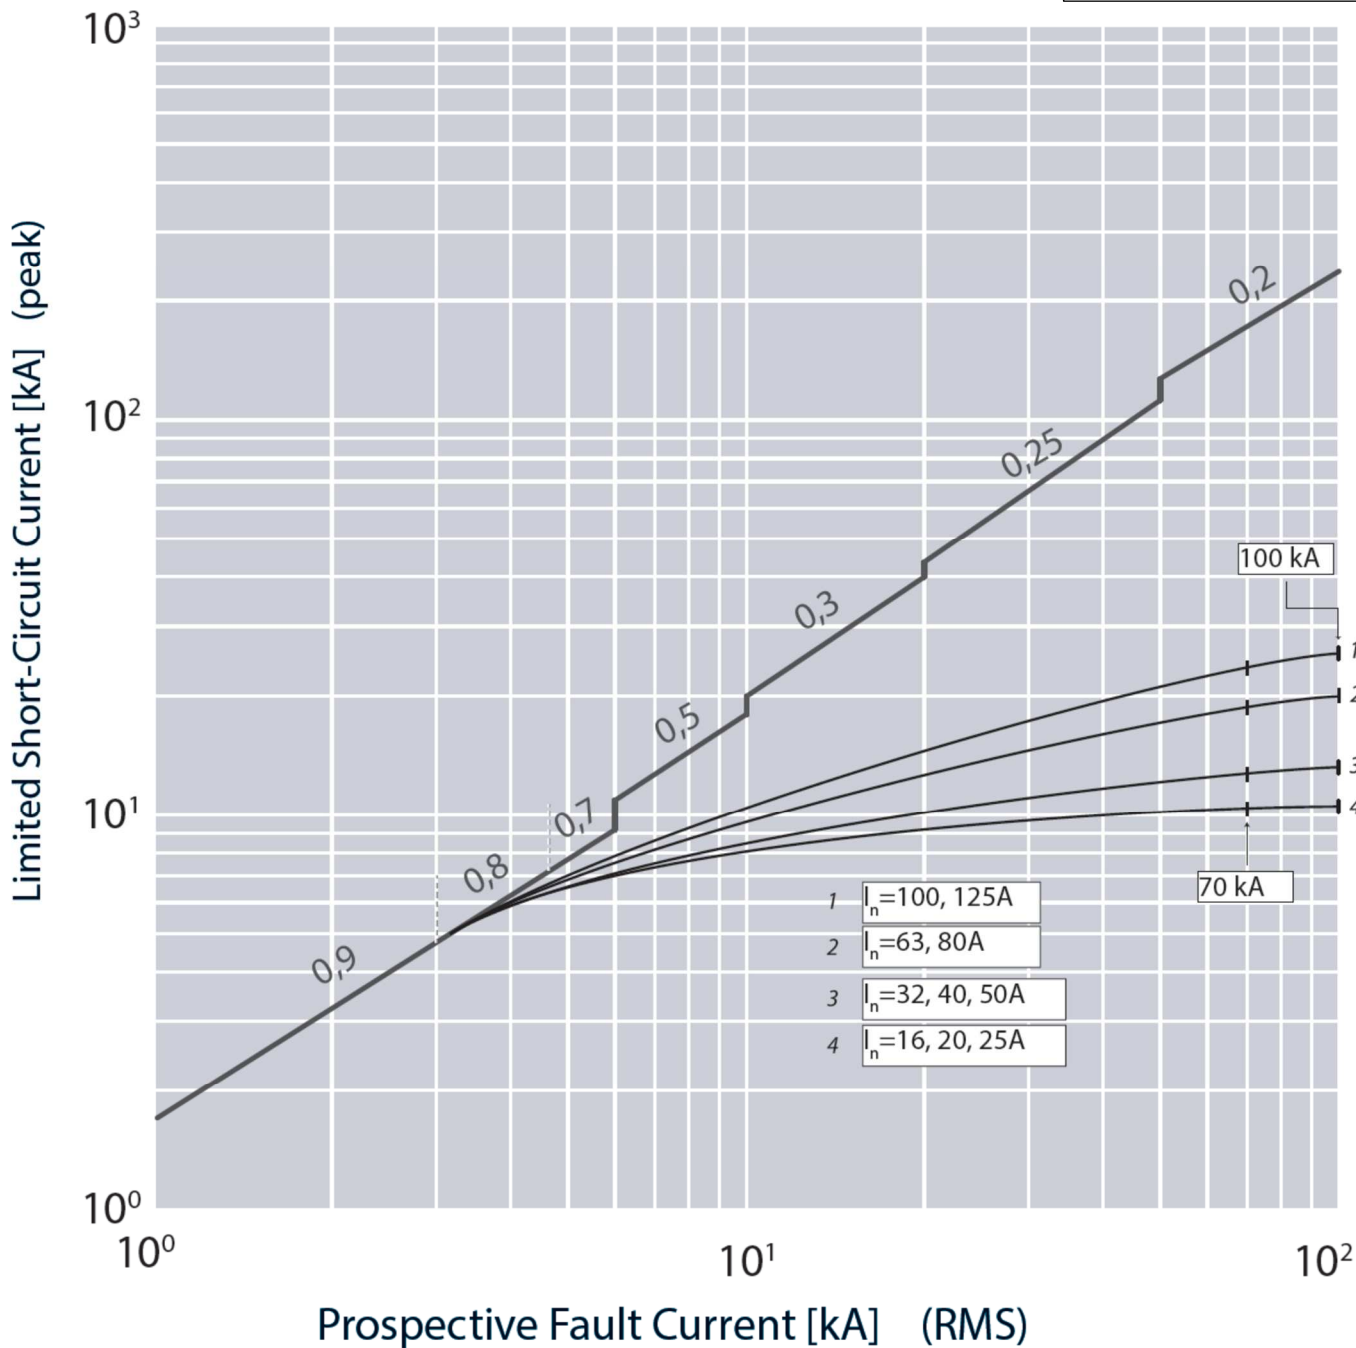

$I_{cu} = 36\text{-}50\text{-}70\text{-}100\text{ kA}$ $I_{max} = 125\text{ 3-4 P}$ $U_e = 415\text{Vac}$ (IEC/EN 60947-2)

Value	Description
I_{cc}	estimated short circuit symmetrical current (RMS value)
I_p	maximum short circuit peak current
	maximum prospective short circuit peak current
	corresponding at the power factor
	maximum real peak short circuit current

Megatiker M3 125 thermal magnetic circuit breakers and MS3 125 switch disconnectors

Reference(s) :

T7303F16/20/25/32/40/50/63/80/100/125; T7304F16/20/25/32/40/50/63/80/100/125;
T7303N16/20/25/32/40/50/63/80/100/125; T7304N16/20/25/32/40/50/63/80/100/125;
T7303H16/20/25/32/40/50/63/80/100/125; T7304H16/20/25/32/40/50/63/80/100/125;
T7303L16/20/25/32/40/50/63/80/100/125; T7304L16/20/25/32/40/50/63/80/100/125;
T7303S125; T7304S125

A) Derating Temperature and configurations

	Ambient temperature									
	30 °C		40 °C		50 °C		60 °C		70 °C	
Fixed version	I_{max} (A)	I_r / I_n	I_{max} (A)	I_r / I_n	I_{max} (A)	I_r / I_n	I_{max} (A)	I_r / I_n	I_{max} (A)	I_r / I_n
Cage terminals, flexible cable	130	1.04	125	1	125	1	114	0.91	108	0.86
Cage terminals, rigid cable	130	1.04	125	1	125	1	114	0.91	108	0.86
Lugs, flexible cable	130	1.04	125	1	125	1	114	0.91	108	0.86
Lugs, rigid cable	130	1.04	125	1	125	1	114	0.91	108	0.86
Spreaders, flexible cable	130	1.04	125	1	125	1	114	0.91	108	0.86
Spreaders, rigid cable	130	1.04	125	1	125	1	114	0.91	108	0.86
Rear flat terminals, flexible cable	130	1.04	125	1	125	1	114	0.91	108	0.86


For further technical information, please contact Legrand technical support.

B) Use in DC

B.1 Circuit breakers: breaking capacity in DC (kA) (values estimates only)

I_{cu} (kA)	I_n (A)	1 pole *	2 poles in series *			3 poles in series *		
		60 V	60 V	110 V	250 V	110 V	250 V	500 V
36	16 ÷ 125	35	36	35	10	35	10	10
50	16 ÷ 125	35	50	35	10	35	10	10


Applied to DC networks insulated from the ground
(this diagram applies to both 3P and 4P circuit breakers):

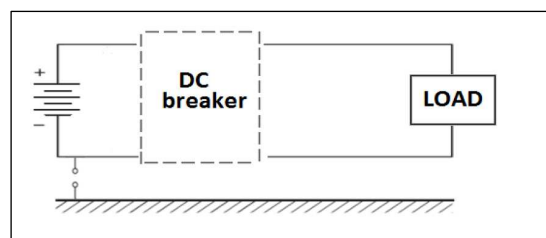


DC breaking capacity in the table respect the standards.

The positive tolerance is between 0% to 5% of voltage status


* Connection modality of the DC breaker:



1 pole



2 poles in series




3 poles in series


B.2 Switch disconnectors: category of use

	1 pole *	2 poles in series *		3 poles in series *	4 poles in series *
I _n (A)	60 V	110 V	250	500 V	750 V
125	DC23	DC23	DC23	DC23	DC23

Applied to DC networks insulated from the ground

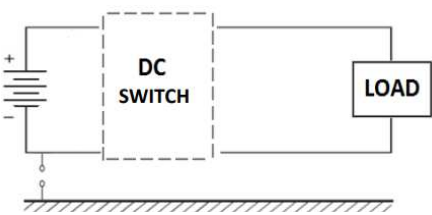

* Connection modality for DC switch disconnectors (polarity can be inverted):

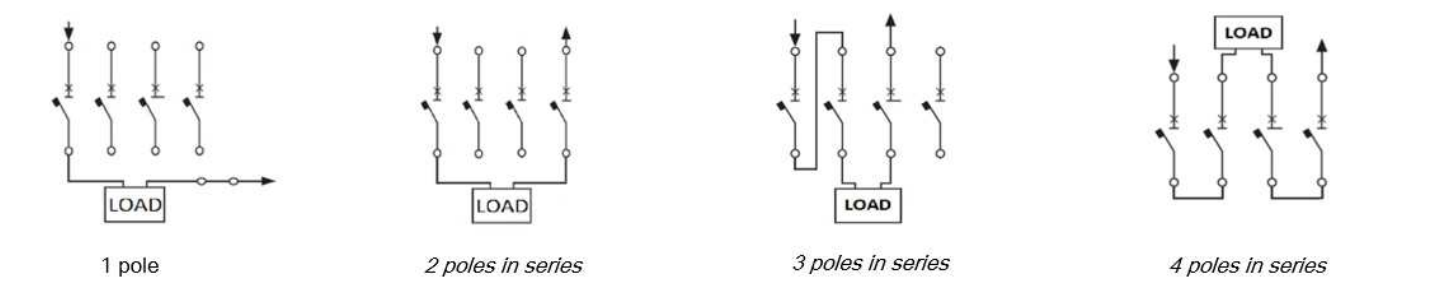

Data indicated in this document refers exclusively to test conditions according to product standards, unless otherwise indicated in the documentation.

For the different conditions of use of the product, inside electrical equipment or in any case inserted in the installation context, refer to the regulatory requirements of the equipment, local regulations and design specifications of the system