

Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :

T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;



CONTENTS	PAGES
1. USE	1
2. RANGE	1
3. DIMENSIONS AND WEIGHTS	1
4. OVERVIEW	5
5. ELECTRICAL CONNECTIONS	5
6. ELECTRICAL AND MECHANICAL CHARACTERISTICS	7
7. CONFORMITY	9
8. EQUIPMENTS AND ACCESSORIES	10
9. CURVES	13

1. USE

Megatiker MP3 platform has been developed to give a new solution of protection devices for a more precise approach in power installations in order to offer the correct answer for different project needs.

Megatiker MP3 platform provide a complete project approach in premium market segment, offering a range completely suitable for high power application with high performance breakers in compact dimensions and at a competitive costs.

2. RANGE


Circuit breakers

Megatiker MP3 250								
I _n (A)	36 kA		50 kA		70 kA		100 kA	
	3P	4P	3P	4P	3P	4P	3P	4P
6.3	T733F6MP	T734F6MP	T733N6MP	T734N6MP	T733H6MP	T734H6MP	T733L6MP	T734L6MP
12.5	T733F12MP	T734F12MP	T733N12MP	T734N12MP	T733H12MP	T734H12MP	T733L12MP	T734L12MP
25	T733F25MP	T734F25MP	T733N25MP	T734N25MP	T733H25MP	T734H25MP	T733L25MP	T734L25MP
32	T733F32MP	T734F32MP	T733N32MP	T734N32MP	T733H32MP	T734H32MP	T733L32MP	T734L32MP
50	T733F50MP	T734F50MP	T733N50MP	T734N50MP	T733H50MP	T734H50MP	T733L50MP	T734L50MP
80	T733F80MP	T734F80MP	T733N80MP	T734N80MP	T733H80MP	T734H80MP	T733L80MP	T734L80MP
100	T733F100MP	T734F100MP	T733N100MP	T734N100MP	T733H100MP	T734H100MP	T733L100MP	T734L100MP
160	T733F160MP	T734F160MP	T733N160MP	T734N160MP	T733H160MP	T734H160MP	T733L160MP	T734L160MP
220	T733F220MP	T734F220MP	T733N220MP	T734N220MP	T733H220MP	T734H220MP	T733L220MP	T734L220MP


3. DIMENSIONS AND WEIGHTS

3.1 Dimensions

Lateral view

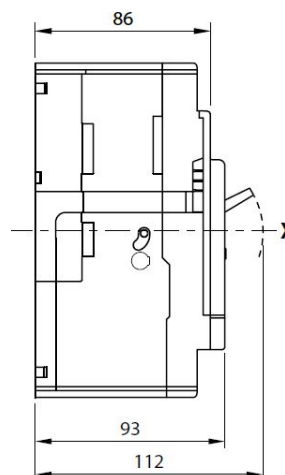

Frontal view (3 and 4 poles)

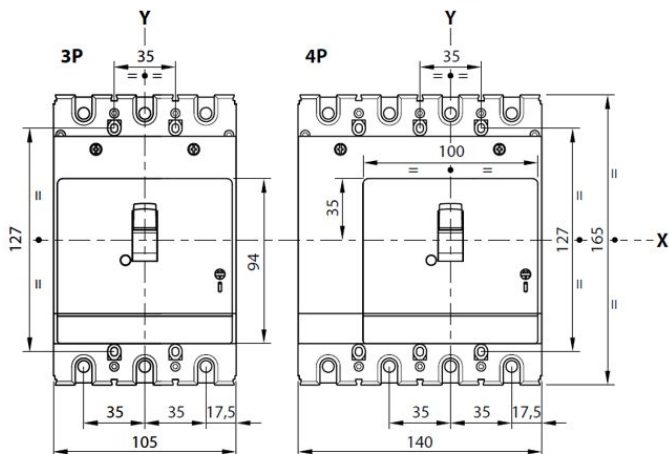


Megatiker MP3 250 only magnetic circuit breakers


Reference(s) :

T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;


Plug-in version (3P)

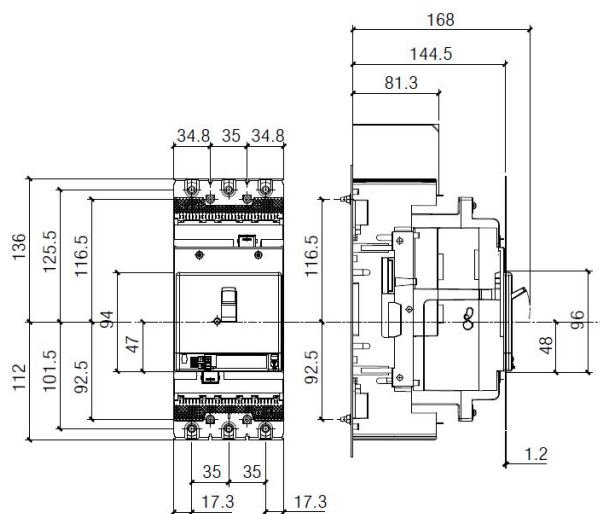


Draw-out version (4P)

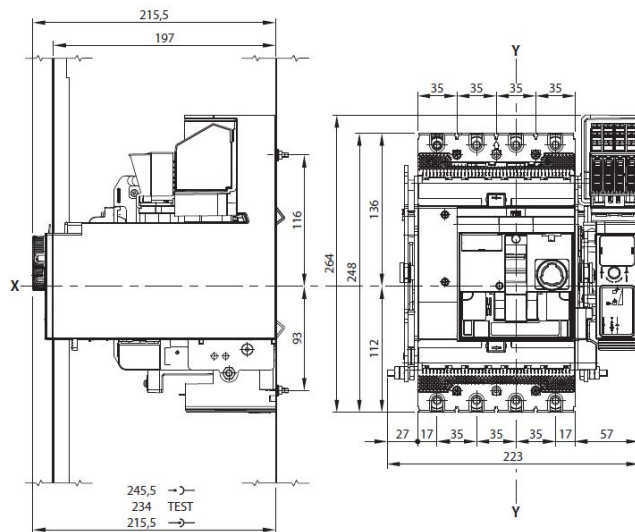

Plug-in version (4P)

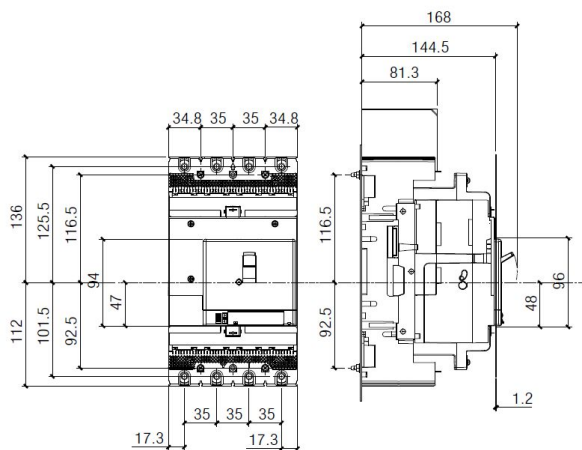

Rear terminals

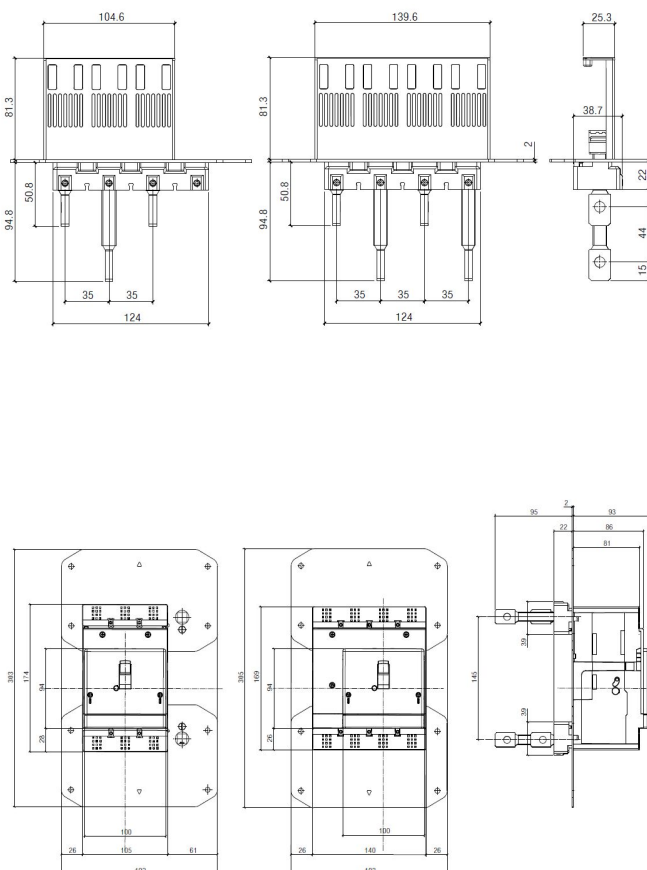


Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :

T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;


Interlock (3P)

(for rear plate interlock dimension, see relative instruction sheet)



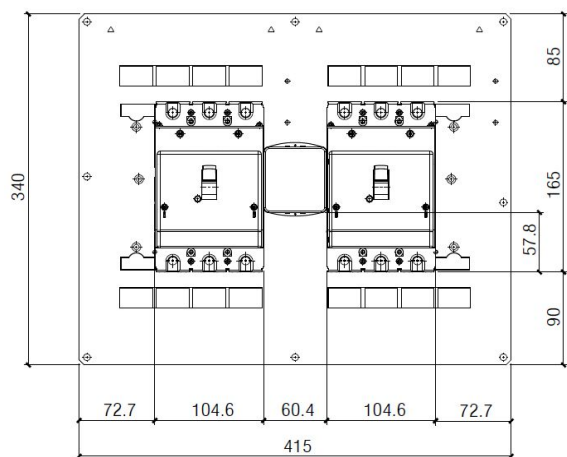


Interlock (4P)


(for rear plate interlock dimension, see relative instruction sheet)

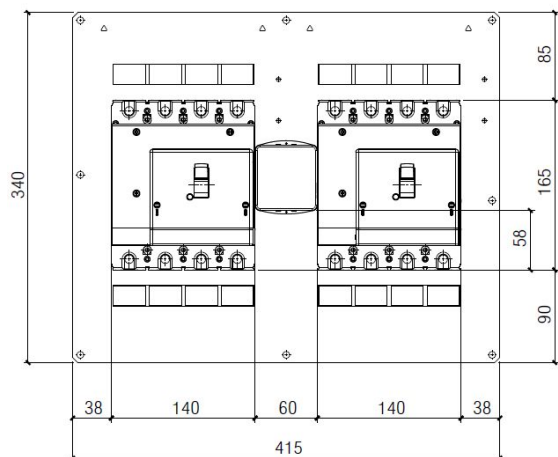

Direct rotary handle

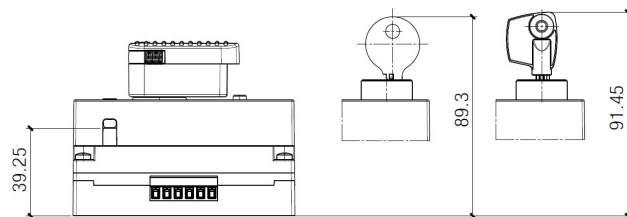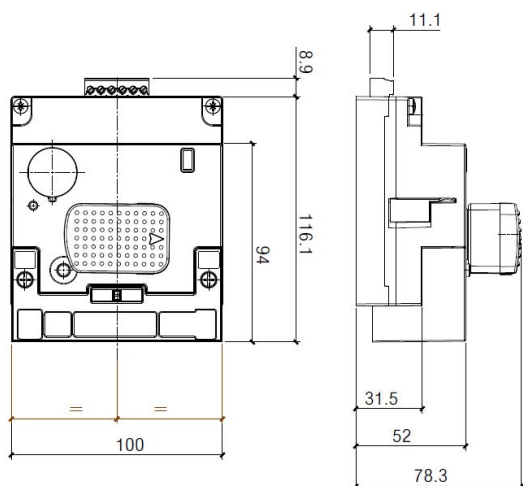



Vari-depth rotary handle

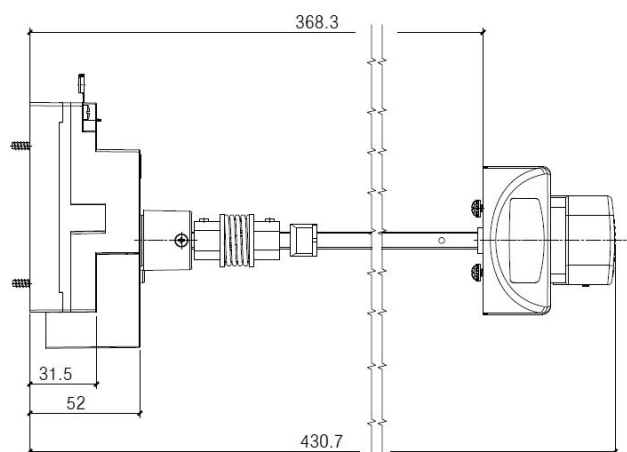



Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :


T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

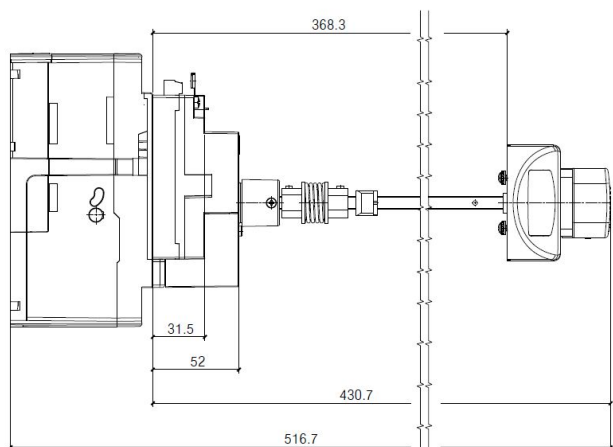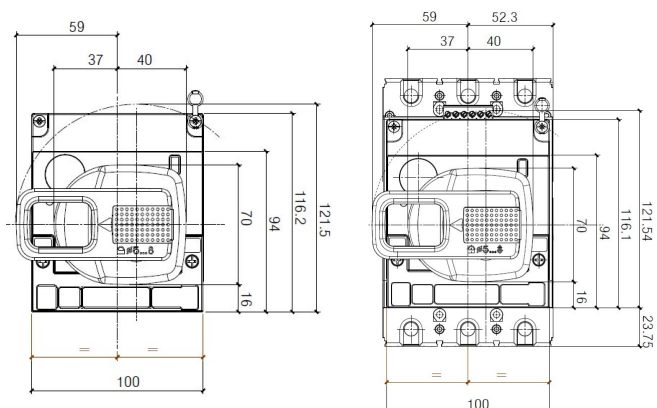


Sealable terminal shields

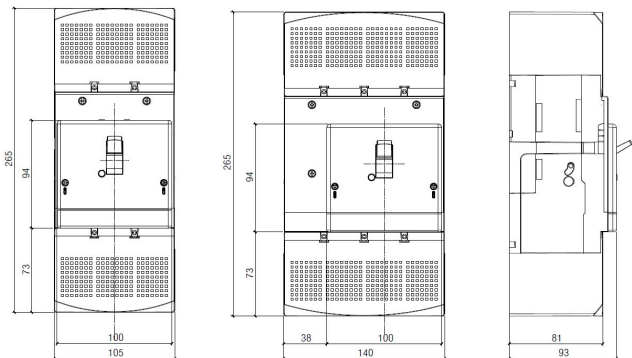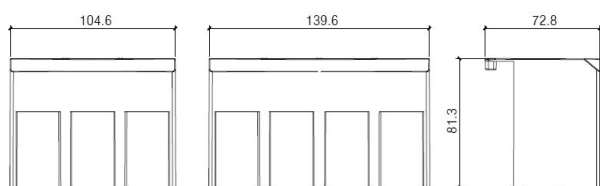

Spreaders


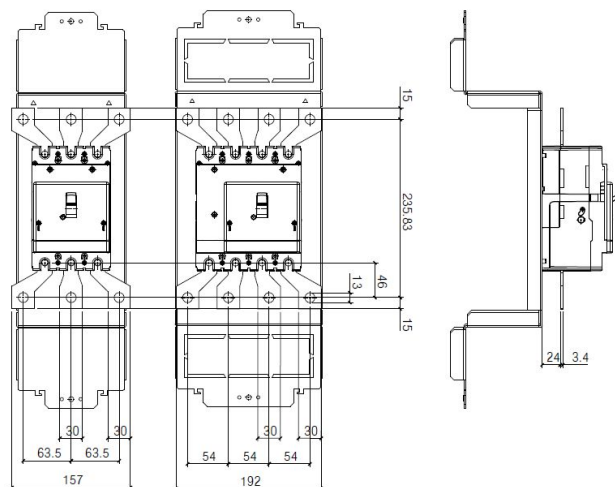


Motor operator

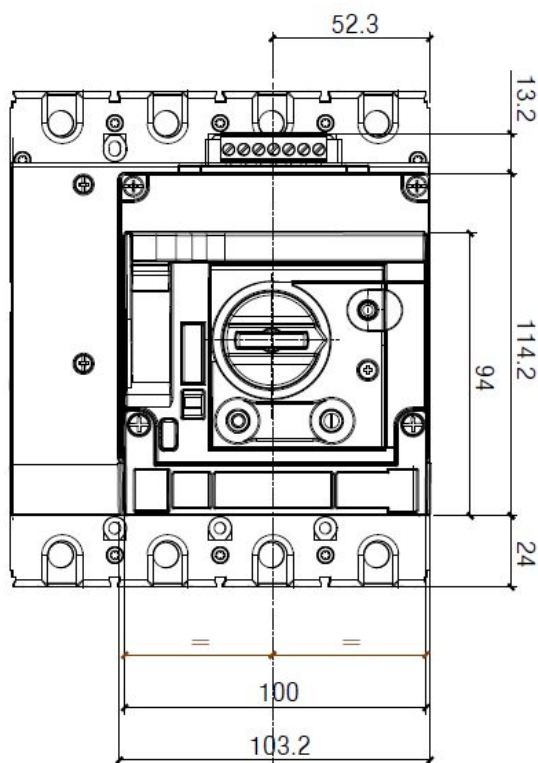

Megatiker MP3 250 only
magnetic circuit breakers

Reference(s) :
T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

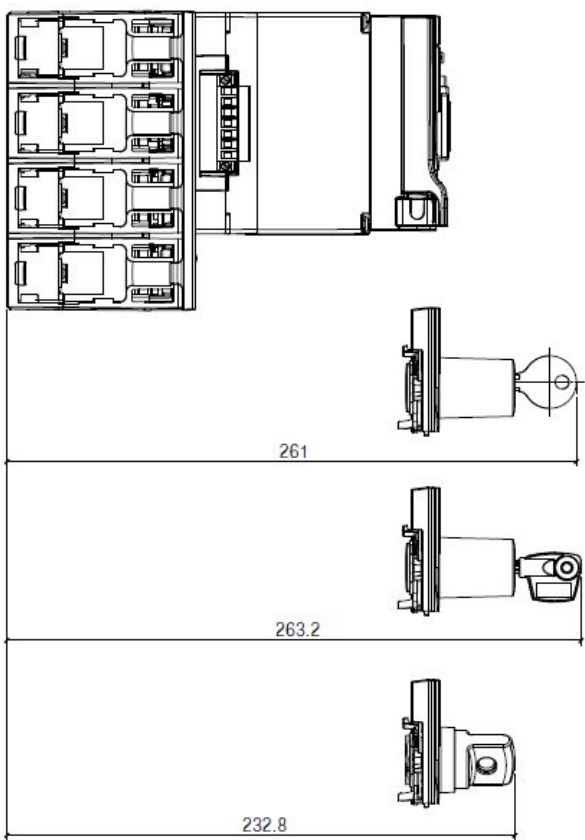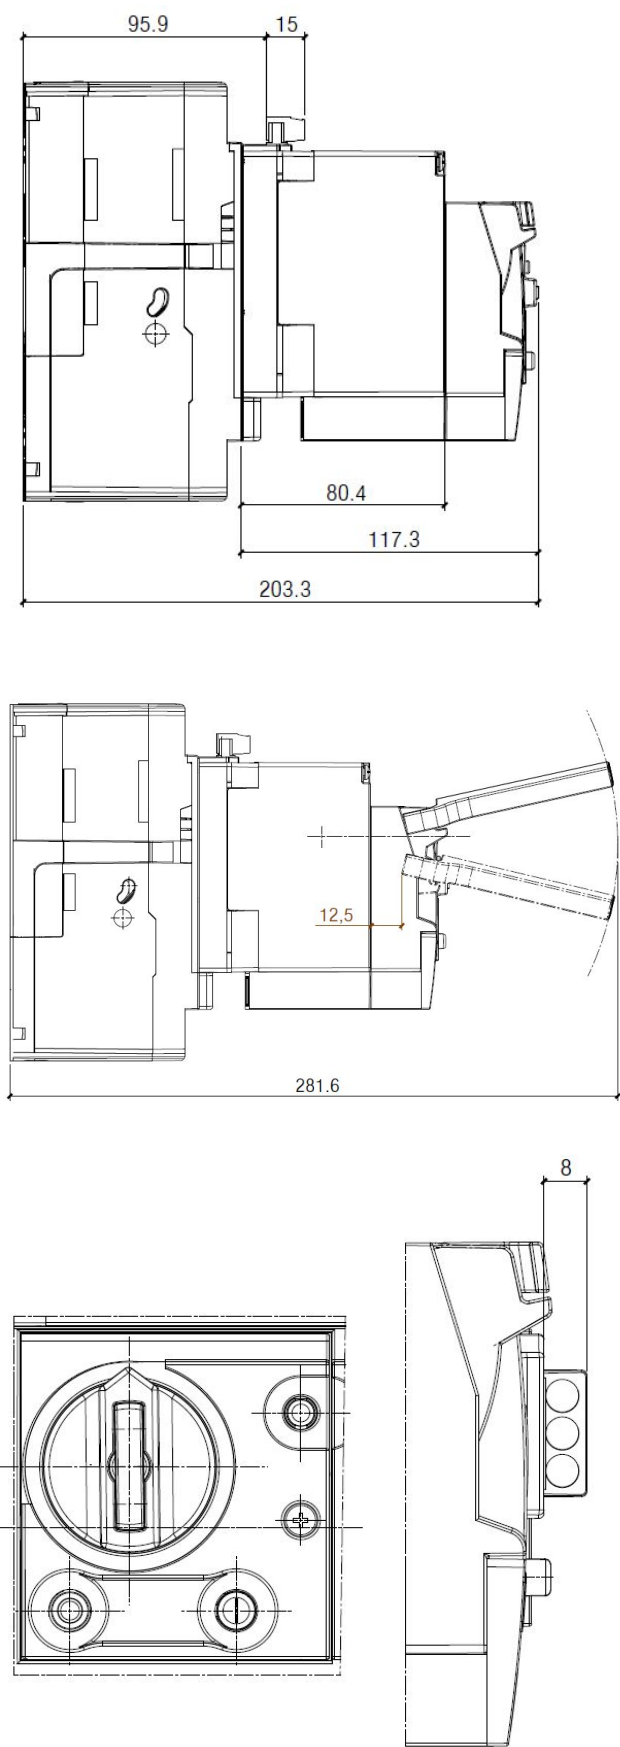

3.2 Weights

Configuration	Weights (Kg)	
	3P	4P
Circuit breaker/switch disconnecter	1.5	1.9
Plug-in*	3.5	4.5
Draw-out**	2.5	
Interlock*	0.35	
Rear interlock (for plug-in/draw-out version)*	5	
Motor operator*	1	
* to add to device weight		
** to add to device and plug-in weights		

4. OVERVIEW

4.1 Supplied with:

- fixing screws (2 for 3P and 4 for 4P)
- screws for connections (6 for 3P and 8 for 4P)
- phase insulators (2 for 3P and 3 for 4P)

5. ELECTRICAL CONNECTIONS

5.1 Mounting possibilities

On plate:

- Vertical
- Horizontal
- Supply inverter type



Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :




T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

5.2 Mounting



(see instruction sheet for detailed mounting procedures)

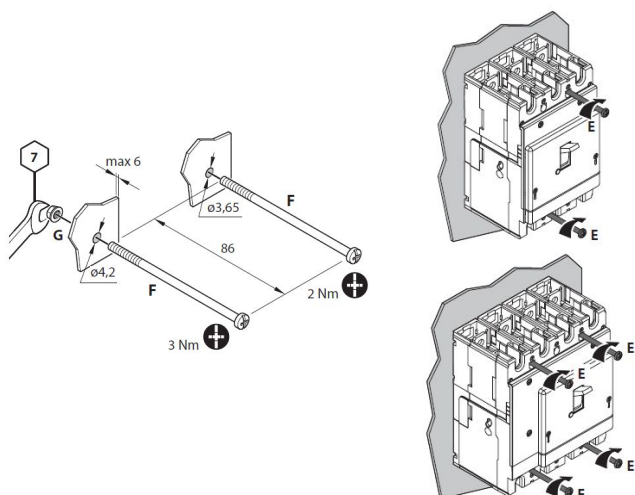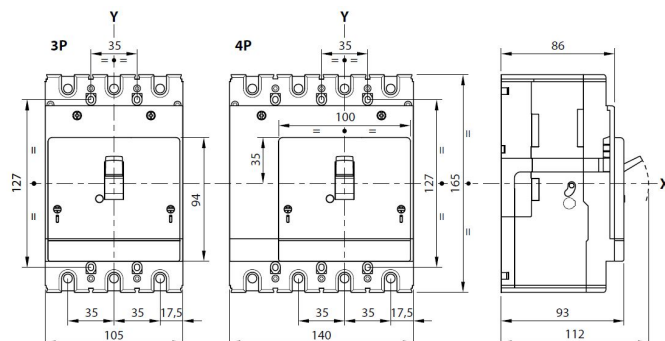

Busbars/cable lugs:

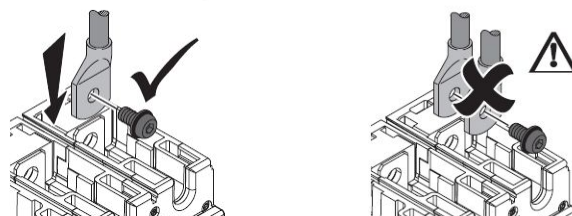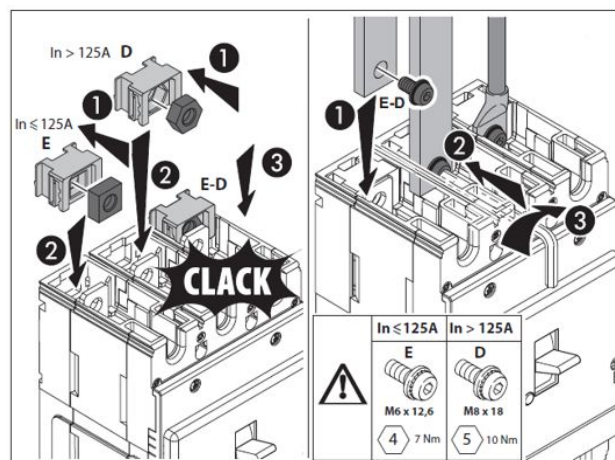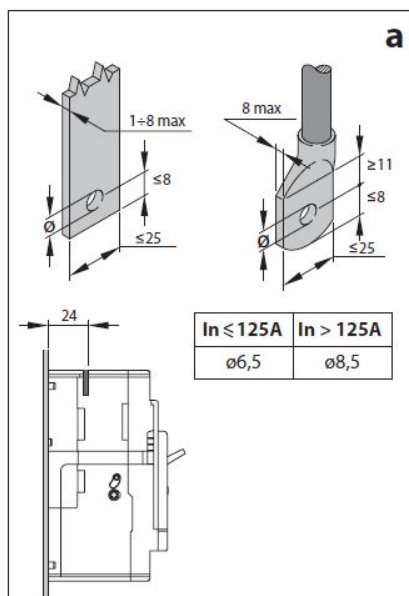

Cables:

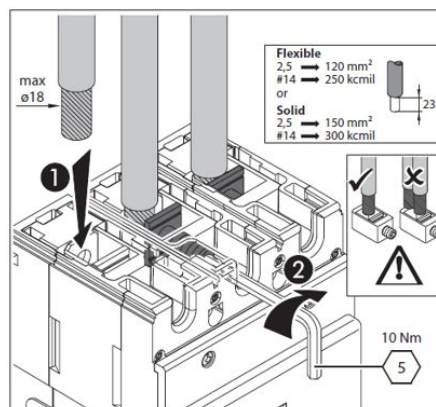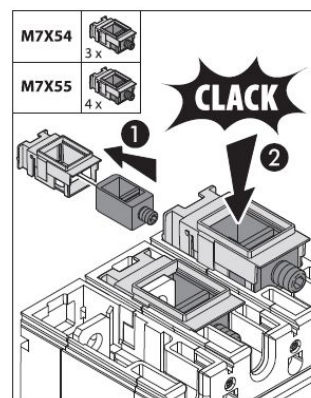

Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :


T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

6. ELECTRICAL AND MECHANICAL CHARACTERISTICS

Circuit breaker

Circuit Breaker	Megatiker MP3 250 F/N/H/L (36kA, 50kA, 70kA, 100kA)
Rated current (A)	6.3-12.5-25-32-50-80-100-160-220
Poles	3 - 4
Pole pitch (mm)	35
Rated insulation voltage (50/60Hz) U_i (V)	800
Rated operating voltage (50/60Hz) U_o (V)	690
Rated impulse withstand current U_{imp} (kV)	8
Rated frequency (Hz)	50 - 60
Reference ambient temperature(°C)	40 - 50
Operating temperature (°C)	-25 ÷ 70
Mechanical endurance (cycles)	12000
Mechanical endurance with motor control (cycles)	12000
Electrical endurance at I_n (cycles)	6000
Electrical endurance at 0.5 I_n (cycles)	6000
Utilization category	A
Suitable for isolation	Yes
Type of protection	Magnetic
Thermal adjustment I_t	-
Magnetic adjustment I_l (A)	6-14 x I_n
Neutral protection for 4P (% I_n of phase pole)	100
Dimensions (W x H x D) (mm)	105 x 165 x 86 (3P) 140 x 165 x 86 (4P)

6.1 Main parts constituting the circuit breaker

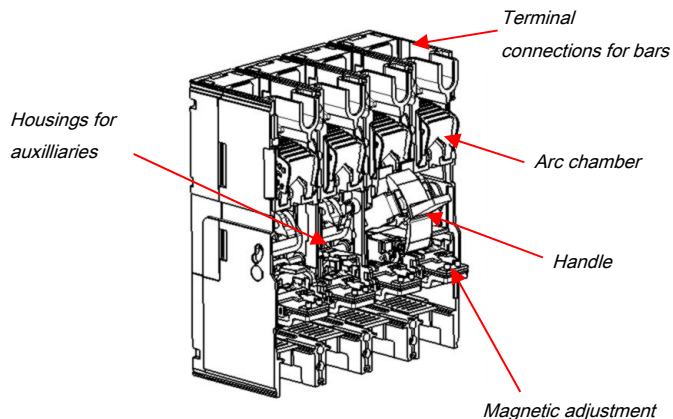

6.2 Breaking capacity (kA)

		Breaking capacity (kA) & I_{cs}			
		3P-4P			
IEC 60947-2	U_e/I_{cu} (I_{cu} letter)	36kA (F)	50kA (N)	70kA (H)	100kA (L)
	240 V AC	70	90	100	150
	415 V AC	36	50	70	100
	500 V AC	16	18	30	35
	690 V AC	7	8	20	22
	250 V DC	10	10	10	10
	I_{cs} (% I_{cu})	100	100	100	100
	Rated making capacity under short circuit I_{cm}				
	I_{cm} (kA) at 415V	76.5	105	154	220
	240 V AC	70	90	100	150
NEMA AB-1	500 V AC	16	18	30	35
	690 V AC	7	8	20	22

6.3 Rated current (I_n) at 40°C / 50°C

I_n (A)	Phases limit trip current	
	magnetic (I_l)	
	min	max
6.3	37.8	88.2
12.5	75	175
25	150	350
32	192	448
50	300	700
80	480	1120
100	600	1400
160	960	2240
220	1320	3080

6.3 Load operations

Force on handle	N
Opening operation	63,5
Closing operation	66
Restore operation	86,5

6.4 Electrodynamic forces

The table below shows an indication of suggested distances to keep between the breaker and the first fixing point of the conductor and bars in order to reduce the effects of the electrodynamic stresses that may be created during a short circuit. In the realization of anchorage system it is recommend the use of isolators suitable for the type of conductor used and the operating voltage.

Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :

T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

I _{cc} (kA)	Maximum Distance (mm)
36	350
50	300
70	250
100	200

According to conductor type and bar system (except Legrand bar kits), the choice of the distance to keep is to be calibrated by the installer.

Also installer must take into account the weight of the conductors so that this does not affect the electrical junction between the conductor itself and the connection point.

6.5 Power losses per pole under I_n

Circuit breaker

In (A)	Power losses per pole (W)								
	6.3	12.5	25	32	50	80	100	160	220
Cage terminals	1.06	0.60	2.39	3.92	0.77	1.96	3.07	7.85	14.84
Lugs	0.97	0.55	2.19	3.58	0.70	1.79	2.80	7.17	13.55
Spreaders	0.82	0.46	1.84	3.02	0.59	1.51	2.36	6.04	11.41
Rear terminals	1.00	0.56	2.26	3.70	0.72	1.85	2.89	7.39	13.98

Note: power loss in the table above are referred and measured as described in the standard IEC 60947-2 (Annex G) for circuit-breakers. Values in the table are referred to a single phase.

6.6 DERATINGS

according to IEC/EN 60947-1

6.6.1 Temperature

Rated current and his adjustment has to be considered relating to a rise or fall of ambient temperature and to a different version or installation conditions. The table below indicates the maximum long-time (LT) protection setting depending on the ambient temperature.

	Temperature Ta (°C)											
I _n (A)	-25	-20	-10	-5	0	10	20	30	40	50	60	70
6.3	9	9	9	8	8	8	7	7	6.3	6.3	6	5
12.5	18	18	17	17	16	15	14	13	12.5	12.5	11	11
25	37	36	34	33	32	30	29	27	25	25	23	21
32	47	46	44	42	41	39	37	34	32	32	29	27
50	74	72	68	66	64	61	57	54	50	50	45	43
80	118	114	109	106	103	98	92	86	80	80	72	68
100	147	143	136	132	129	122	115	107	100	100	90	85
160	235	229	218	212	206	195	184	172	160	160	144	136
220	323	315	299	291	284	268	252	236	220	220	198	187

For derating temperature with other configurations, see table A.

6.6.2 Specific condition use

Climatic conditions

according to IEC/EN 60947-1 Annex Q, Cat. F subject to temperature, humidity, vibration, shock and salt mist.

Pollution degree

for Megatiker MP3 250 circuit breakers, degree 3, according to IEC/EN 60947-2

6.6.3 Altitude

Altitude derating for Megatiker MP3 250

Altitude (m)	2000	3000	4000	5000
U _e (V)	690	590	520	460
I _n (A) (T _a = 40°C/50°C)	1 x I _n	0.98 x I _n	0.93 x I _n	0.9 x I _n

6.6.4 Use in DC

See table B.

Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :

T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

7. CONFORMITY

Megatiker MP3 250 range of product concerning circuit-breakers and switch-disconnectors exceed compliance with the IEC/EN standard 60947-2 and 60947-3 respectively. Certification available by IECEE CB-scheme or LOVAG Compliance scheme.

Megatiker MP3 250 respect the European Directives REACh, RoHS, RAEE.


For specific information, please contact Legrand support.

7.1 Marking


Product (both circuit breakers and switch disconnectors) are provided with labelling in full conformity to the referred standard and directives requirements by laser or sticker labels (for illustrative purposes only) as:

Product laser label on front

- Manufacturer responsible
- Denomination, type product, code
- Standard conformity
- Standard characteristics declared
- Coloured identification of I_{cu} at 415V

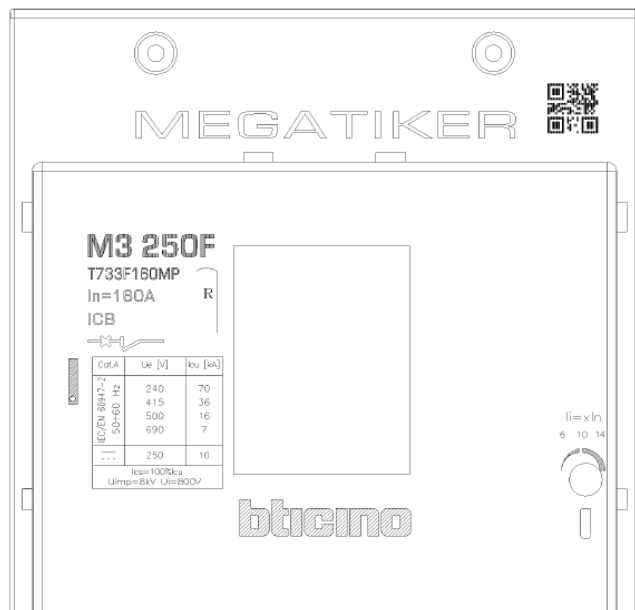


- Mark/Licence (if any)
- Directive requirements
- Bar code identification product
- Manufacturing Country




Mark sticker label on side

- Product code
- Mark/Licence (if any)
- Country deviation, if any

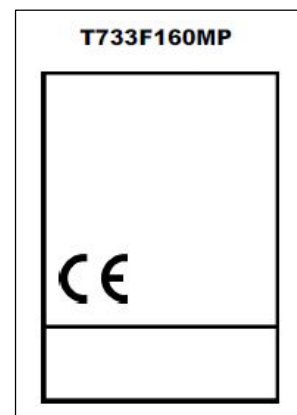

Packaging sticker label

- Manufacturer responsible
- Denomination and type product
- Mark/Licence (if any)
- Directive requirements
- Bar code identification product

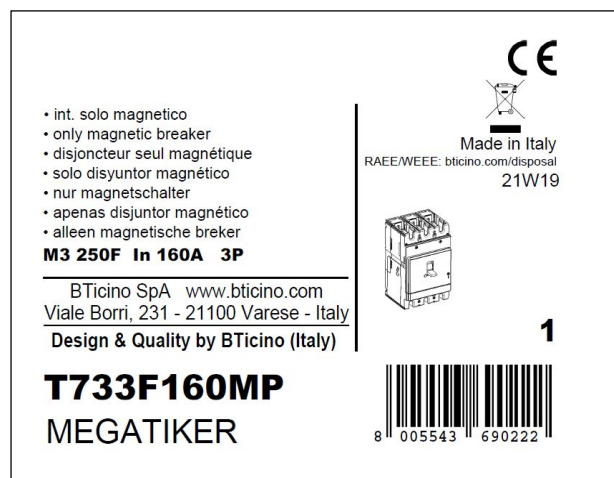

Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :

T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

8. EQUIPMENTS AND ACCESSORIES

8.1 Releases (for Megatiker M3 125/250, M1 and M2)

- shunt releases with voltage:

12 Vac and dc
24 Vac and dc
48 Vac and dc
110÷130 Vac
220÷277 Vac
380÷480 Vac

ref. M7S012
ref. M7S024
ref. M7S048
ref. M7S110
ref. M7S230
ref. M7S415

Maximum power = 400 VA / W

- undervoltage releases with voltage:

12 Vac and dc
24 Vac and dc
48 Vac and dc
110÷130 Vac and dc
220÷240 Vac
277 Vac
380÷415 Vac
440÷480 Vac

ref. M7U012
ref. M7U024
ref. M7U048
ref. M7U110
ref. M7U230
ref. M7U277
ref. M7U415
ref. M7U480

Maximum power = 4 VA

Circuit breaker opening time < 50 ms

UVR releases can be used on Megatiker M3 125/250 starting from batch 19W15

- time-lag undervoltage releases (800 ms)

Time-lag modules with voltage:

230 V ac
400 V ac

ref. M7000MR/230
ref. M7000MR/400

Release

ref. M7UEM

(to be equipped with a time-lag module M7000MR/230 and M7000MR/400)

8.2 Auxiliary contacts

(for Megatiker M3 125/250, M1 and M2)

Auxiliary contacts (1NC and 1 NO)

ref. M7R32

(for rotary handle)

Changeover switch 3A – 250 VAC

ref. M7X01

Signalling contact plugged-in / draw-out version

ref. M7B10

(Ref. M7X01 and . M7B10 are also for Megatiker M1/M2)





To show the state of the contacts or opening of the Megatiker M1/M2 and Megatiker M3 125/250 on a fault:

- Auxiliary contact (standard) OC
- Fault signal CTR

Auxiliary contact electrical characteristics		
Rated voltage (V _n)	V (ac or dc)	24 to 250
Intensity (A)	24 V dc	5
	48 V dc	1.7
	110 V dc	0.5
	230 V dc	0.25
	110 V ac	4
	230/250 V ac	3

Configurations:

Megatiker MP3 250 → 1 auxiliary contacts + 1 fault signal

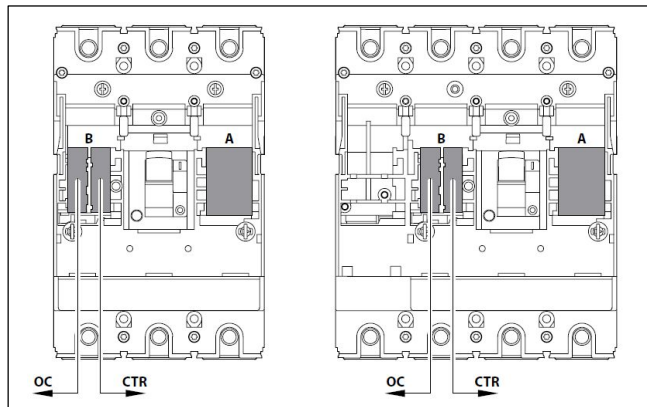

	B	A
UVR	✗	✓
ST	✗	✓
OC/CTR	✓	✗

To get more information on auxiliary mounting procedures, please refer to product instruction sheet.

8.3 Universal keylocks

These keylocks must be used for all the accessories that can be locked:

- rotary handle
- motor operator
- plug-in mechanism
- draw-out mechanism

For each of these, a specific accessory (indicated in the specific section of this datasheet) must be added in order to get the complete locking kits for the specific application.

- 1 lock + 1 flat key with random mapping ref. M7R24
- 1 lock + 1 flat key with fixed mapping (EL43525) ref. M7R25
- 1 lock + 1 flat key with fixed mapping (EL43363) ref. M7R26
- 1 lock + 1 star key with random mapping ref. M7R27

Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :

T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

8.3 Rotary handles

Direct on DPX³ (with auxiliary option)

- Standard (black) ref. M7R24
- For emergency use (red / yellow) ref. M7R25

Vari-depth handle IP55 (with auxiliary option)

- Standard (black) ref. M7R26
- For emergency use (red / yellow) ref. M7R27

Locking accessories (for rotary handle with auxiliary option)

- Key lock accessory for direct rotary handle ref. M7R30
- Key lock accessory for vari-depth rotary handle ref. M7R31
(ref. M7R31 is compatible with Megatiker M3 125 also)

Ref. M7R30 and M7R31 must be used with universal keylocks to get the complete locking kit for rotary handle

8.4 Motor operators

For synchronized operations (energy storage type):


- 24 Vac and dc ref. M7M024
- 48 Vac and dc ref. M7M048
- 110 Vac ref. M7M110
- 230 Vac ref. M7M230

Technical parameters:

Voltage	Property	AC		DC	
		Opening	Closing	Opening	Closing
24V ac/dc	Maximum inrush power (VA)	75	430	55	320
	Rated power (VA)	45	-	20	-
	Absorption time (s)	2.8	0.01	3.3	0.01
	Operating current time (s)	1.1	0.03	1.2	0.03
48V ac/dc	Maximum inrush power (VA)	85	1000	70	690
	Rated power (VA)	65	-	15	-
	Absorption time (s)	3.3	0.006	3.8	0.006
	Operating current time (s)	1.1	0.02	1.3	0.02
110V ac	Maximum inrush power (VA)	95	600	-	-
	Rated power (VA)	60	-	-	-
	Absorption time (s)	3	0.02	-	-
	Operating current time (s)	1.0	0.03	-	-
230V ac	Maximum inrush power (VA)	125	460	-	-
	Rated power (VA)	70	-	-	-
	Absorption time (s)	2.5	0.08	-	-
	Operating current time (s)	0.9	0.03	-	-

It is necessary to foresee a protection device (e.g. fuse) along the motor operator power line. The correct size of the fuse depends on the motor version and on the number of users.

Here a schematic example:



Locking accessory (for motor operator)

- Padlock (for motor operator locking) ref. M7M61
- Key lock accessory for motor operator ref. M7M60

Ref. M7M60 must be used with universal keylocks to get the complete locking kit for motor operator

8.6 Mechanical accessories

- Padlock (for locking in "OPEN" position) ref. M7X02
(ref. M7X02 is compatible with Megatiker M3 125 / M1 / M2)

- Sealable terminal shields:
 - Set of 2 (for 3P) ref. M7C22
 - Set of 3 (for 4P) ref. M7C23

- Insulated shields:
 - Set of 2 (for 3P) ref. M7F01
 - Set of 3 (for 4P) ref. M7F02
 (ref. M7F01/ M7F02 are compatible with Megatiker M3 125 also)

8.7 Connection accessories

Cage terminals

- Set of 3 terminals for cables 150 mm² max (solid) or 120 mm² max (flexible) Cu/Al ref. M7X54
- Set of 4 terminals for cables 150 mm² max (rigid) or 120 mm² max (flexible) Cu/Al ref. M7X55

Spreaders (incoming or outgoing):

- Set of 3 (for 3P) ref. M7A52
- Set of 4 (for 4P) ref. M7A53

Rear terminals (incoming or outgoing):

- Set of 3 (for 3P) ref. M7A56
- Set of 4 (for 4P) ref. M7A57

Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :

T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

8.8 Plug-in version

((A plug-in is a Megatiker M3 250 fitted with special terminals and mounted on a plug-in base))

Bases

(for plug-in and draw-out versions for Megatiker M3 250 and MS3 250)

- Plug-in/draw-out base for 3P *ref. M7B50*
- Plug-in/draw-out base for 4P *ref. M7B51*
- Plug-in/draw-out mobile part kit for 3P *ref. M7B52*
- Plug-in/draw-out mobile part kit for 4P *ref. M7B53*

Plug-in accessories

Locking accessory (for plug-in)

- Key lock accessory for plug-in *ref. M7B64*

Ref. M7B64 must be used with universal keylocks to get the complete locking kit for plug-in version

8.9 Draw-out version

(A Megatiker M3 250 draw-out version is a plug-in Megatiker M3 250 fitted with a "Debro-lift" mechanism which can be used to withdraw the breaker while keeping it on its base)

"Debro-lift" mechanism

(supplied with a rigid slide and handle for drawing-out)

- transformation kit for 3P *ref. M7B54*
- transformation kit for 4P *ref. M7B55*

Frontal masks for draw-out version

(to provide in addition to debro-lift mechanism according to accessory mounted)

- Frontal module, with frontal mask (3P and 4P) *ref. M7B60*
(if neither motor operator nor rotary handle are mounted)
- Frontal mask for motor operator (3P and 4P) *ref. M7B61*

Locking accessory (for draw-out)

- Padlock for draw-out position *ref. M7B65*
- Key lock accessory for draw-out *ref. M7B63*

Ref. M7B63 must be used with universal keylocks to get the complete locking kit for draw-out version

Auxiliary contacts

- Automatic auxiliary contacts for draw-out version *ref. 4 222 30*
- 6 contact connector (under sliding contacts) *ref. 0 098 19*

(Ref. 0 098 19 can be used with both plug-in and draw-out version)

8.10 Interlock mechanism

(for interlocking 2 Megatiker M3 125 HP or 2 Megatiker M3 250)

No frame mixing in interlock mechanism


- Interlock mechanism – standard version *ref. M7I01*
(for fixed version Megatiker M3 125 and 250)
- Interlock mechanism – for electronic module *ref. M7I02*
(for fixed version Megatiker M3 125 and 250)
- Interlock plate for Megatiker M3 250 *ref. M7I05*
- Rear interlock mechanism *ref. M7I03*
(for Megatiker M3 250 plug-in and/or draw-out version)
If used ref. F15/7500P6, maximum 1 set

Megatiker MP3 250 only
magnetic circuit breakers

Reference(s) :
T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

9. CURVES
9.1 Magnetic tripping curve

Update: 29/08/2019

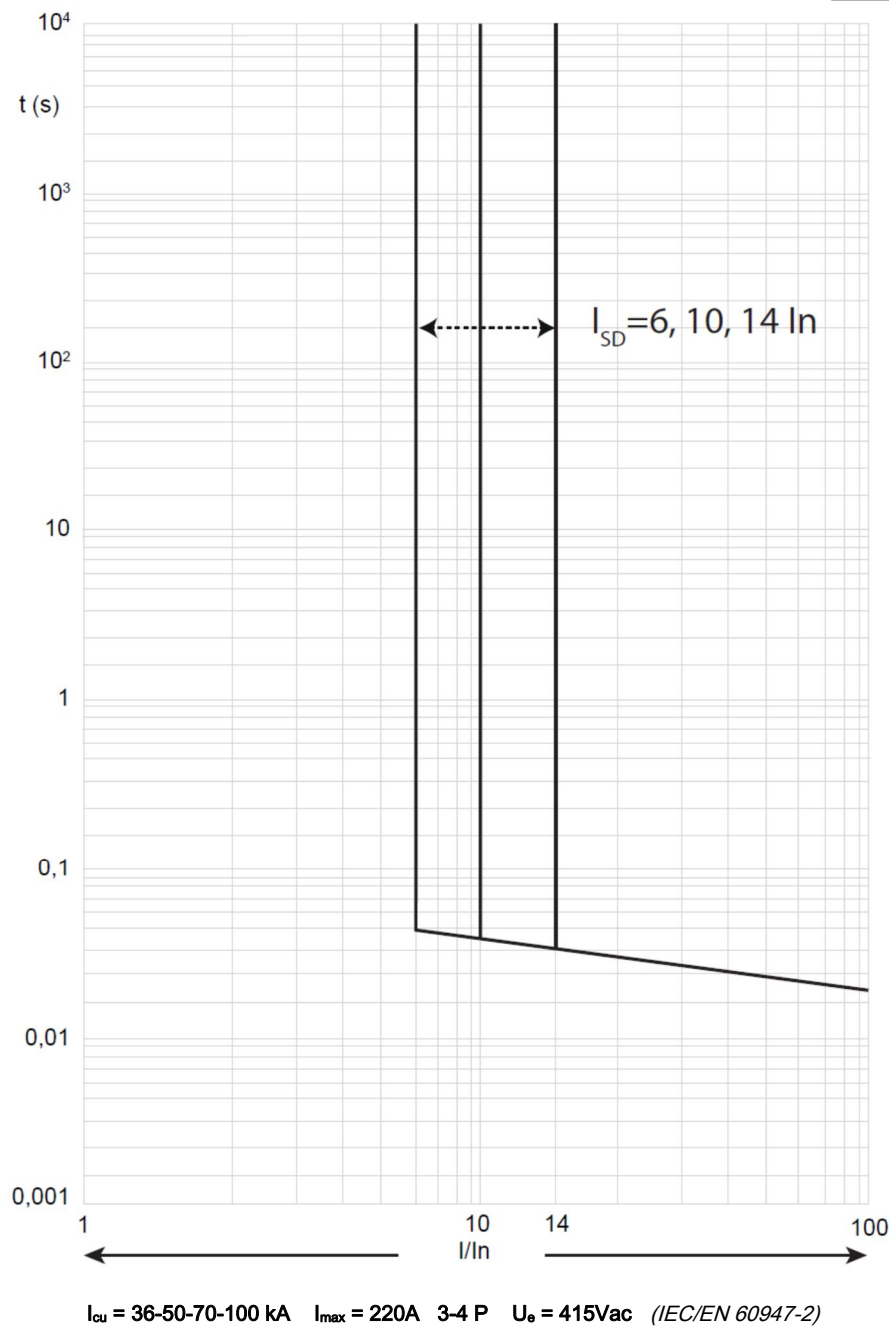

Value	Description
t	time
I	current
I_n	rated current
I_r	long time setting current
curve 1	characteristic with cold start
curve 2	characteristic with hot start


Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :

T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

9.2.1 Pass-through specific energy characteristic curve (breaking capacity $I_{cu} \leq 50\text{kA}$)

Update: 25/11/2020

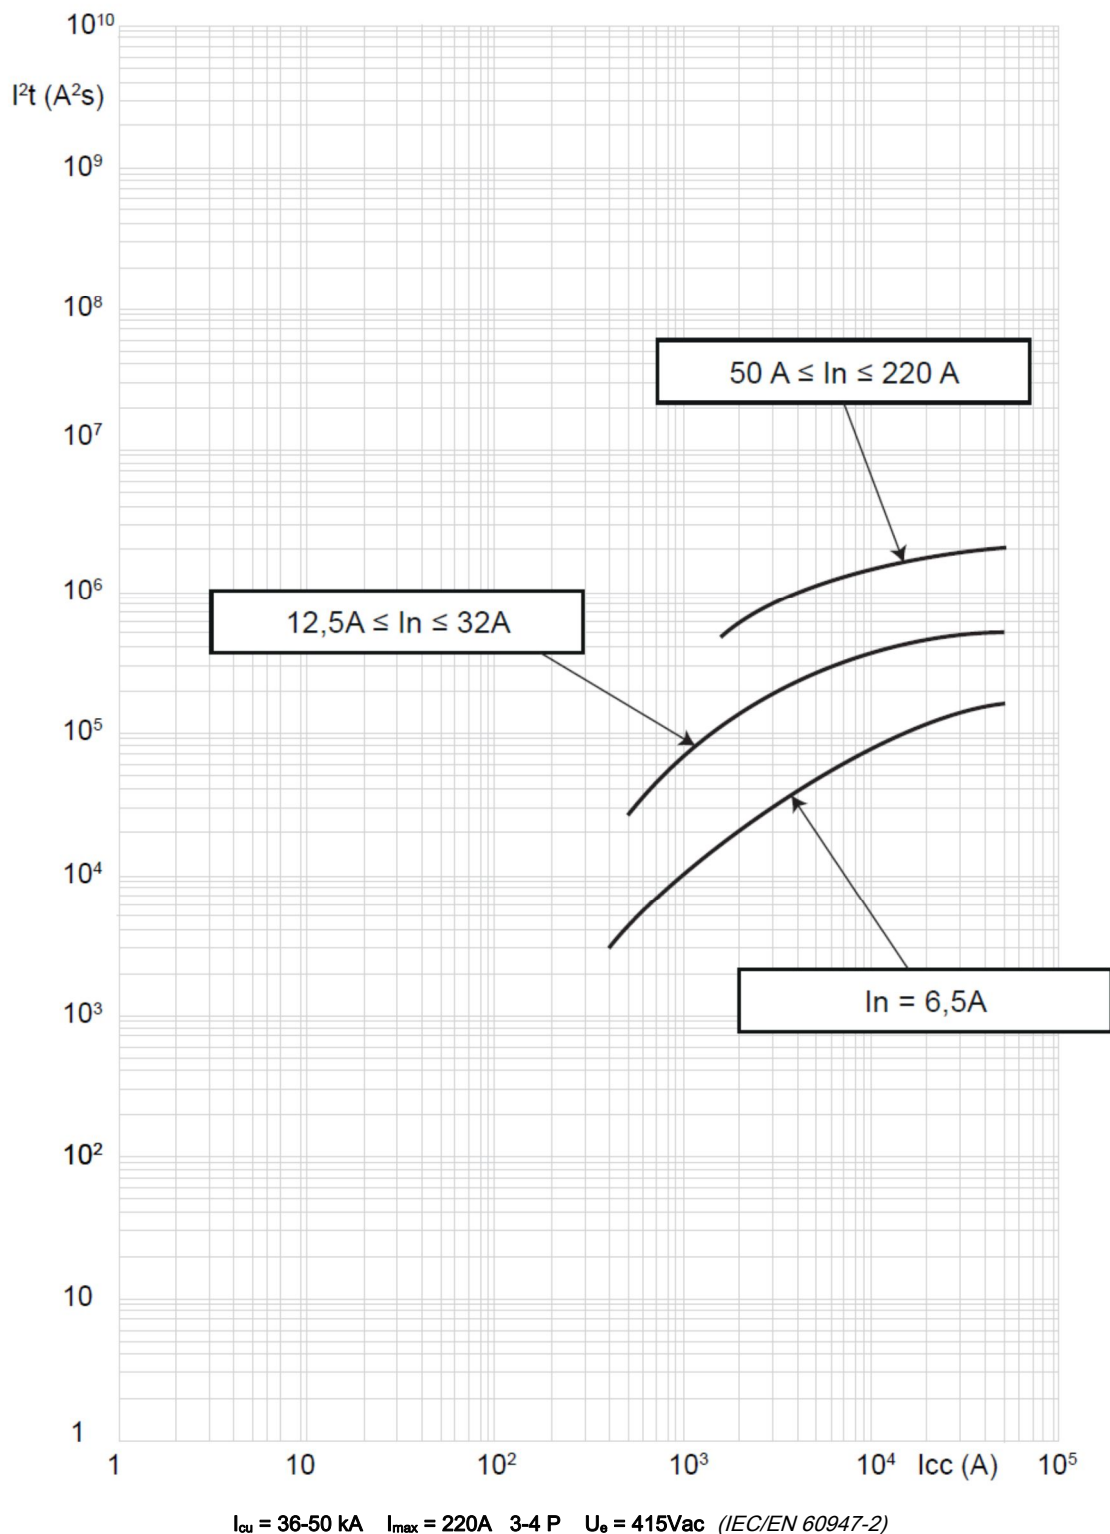

Value	Description
I_{cc}	short circuit current
$I^2t\text{ (A}^2\text{s)}$	pass-through specific energy


Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :

T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

9.2.2 Pass-through specific energy characteristic curve (breaking capacity $I_{cu} > 50\text{kA}$)

Update: 25/11/2020

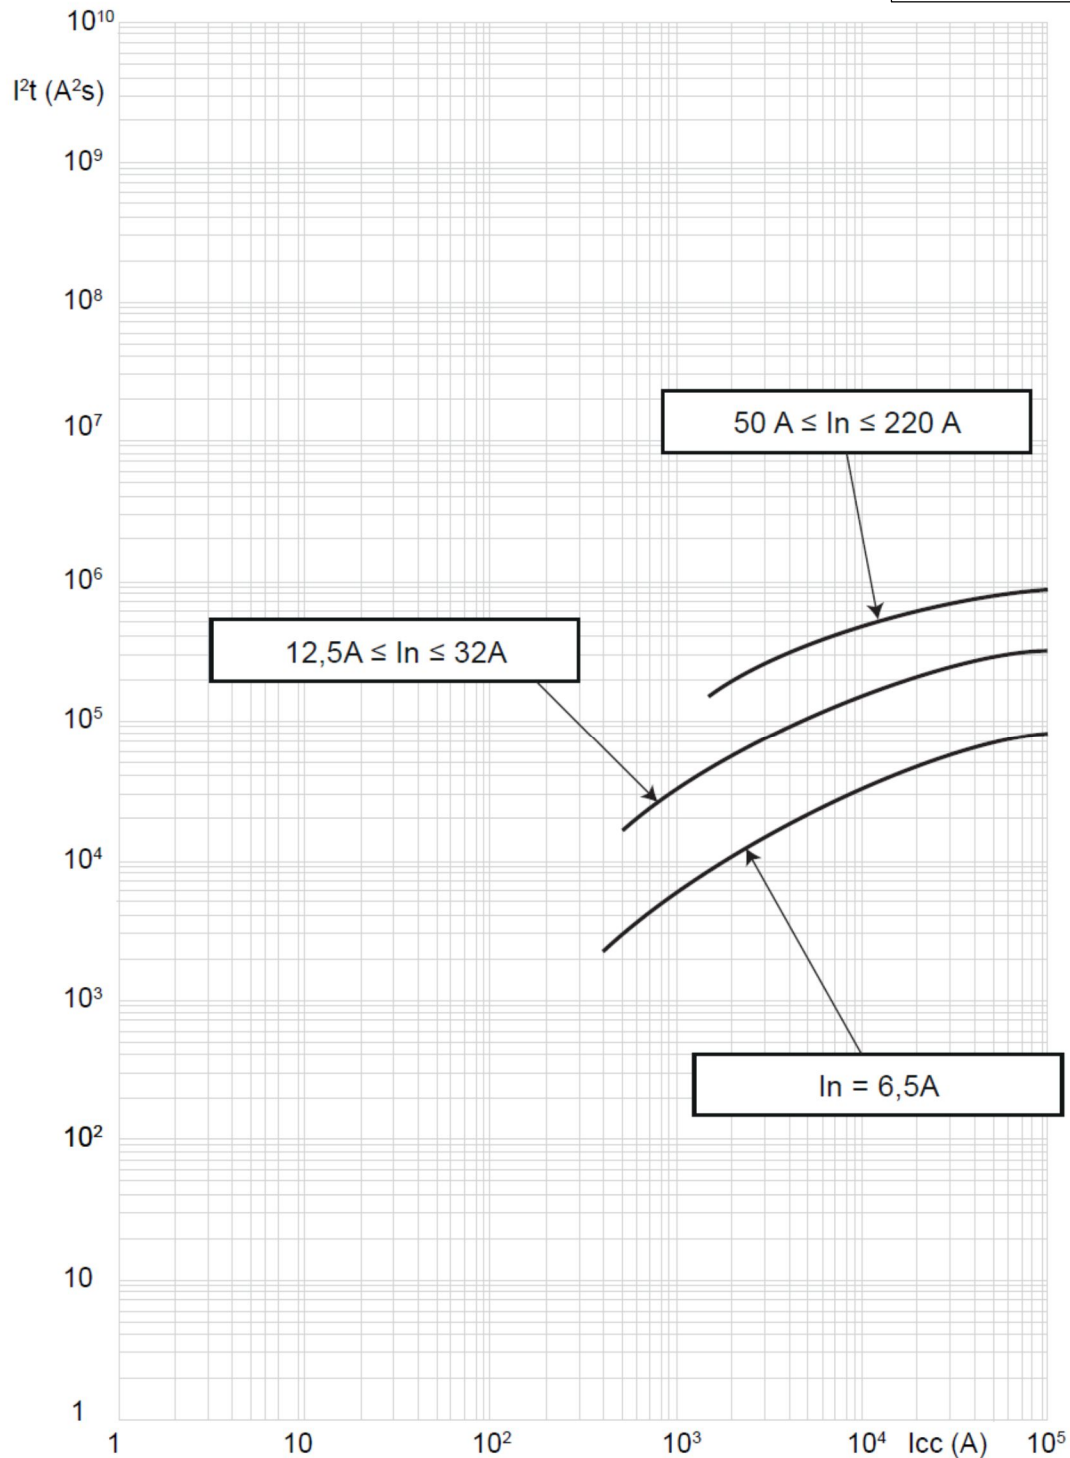

$I_{cu} = 70\text{-}100\text{ kA}$ $I_{max} = 220\text{A}$ 3-4 P $U_o = 415\text{Vac}$ (IEC/EN 60947-2)


Value	Description
I_{cc}	short circuit current
$I^2t \text{ (A}^2\text{s)}$	pass-through specific energy

Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :
T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

9.3.1 Cut-off peak current characteristic curve (kA) (breaking capacity $I_{cu} \leq 50\text{kA}$)

Update: 25/11/2020

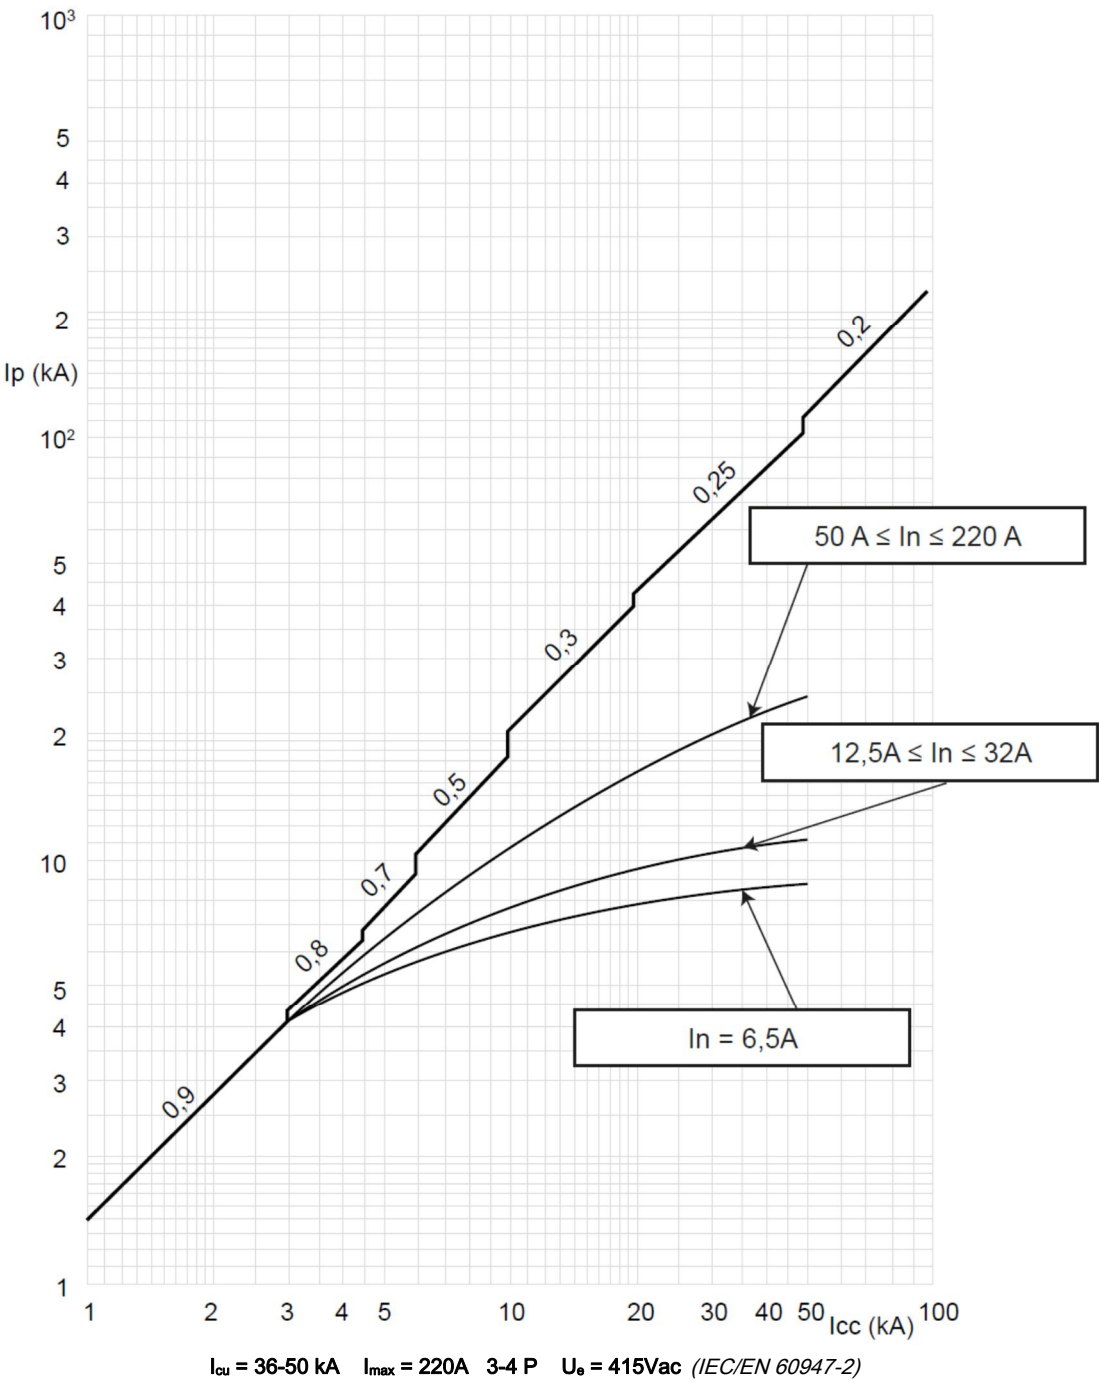


Value	Description
I_{cc}	estimated short circuit symmetrical current (RMS value)
I_p	maximum short circuit peak current
	maximum prospective short circuit peak current corresponding at the power factor
	maximum real peak short circuit current

Megatiker MP3 250 only
magnetic circuit breakers

Reference(s) :
T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

9.3.2 Cut-off peak current characteristic curve (kA) (breaking capacity $I_{cu} > 50\text{kA}$)

Update: 25/11/2020

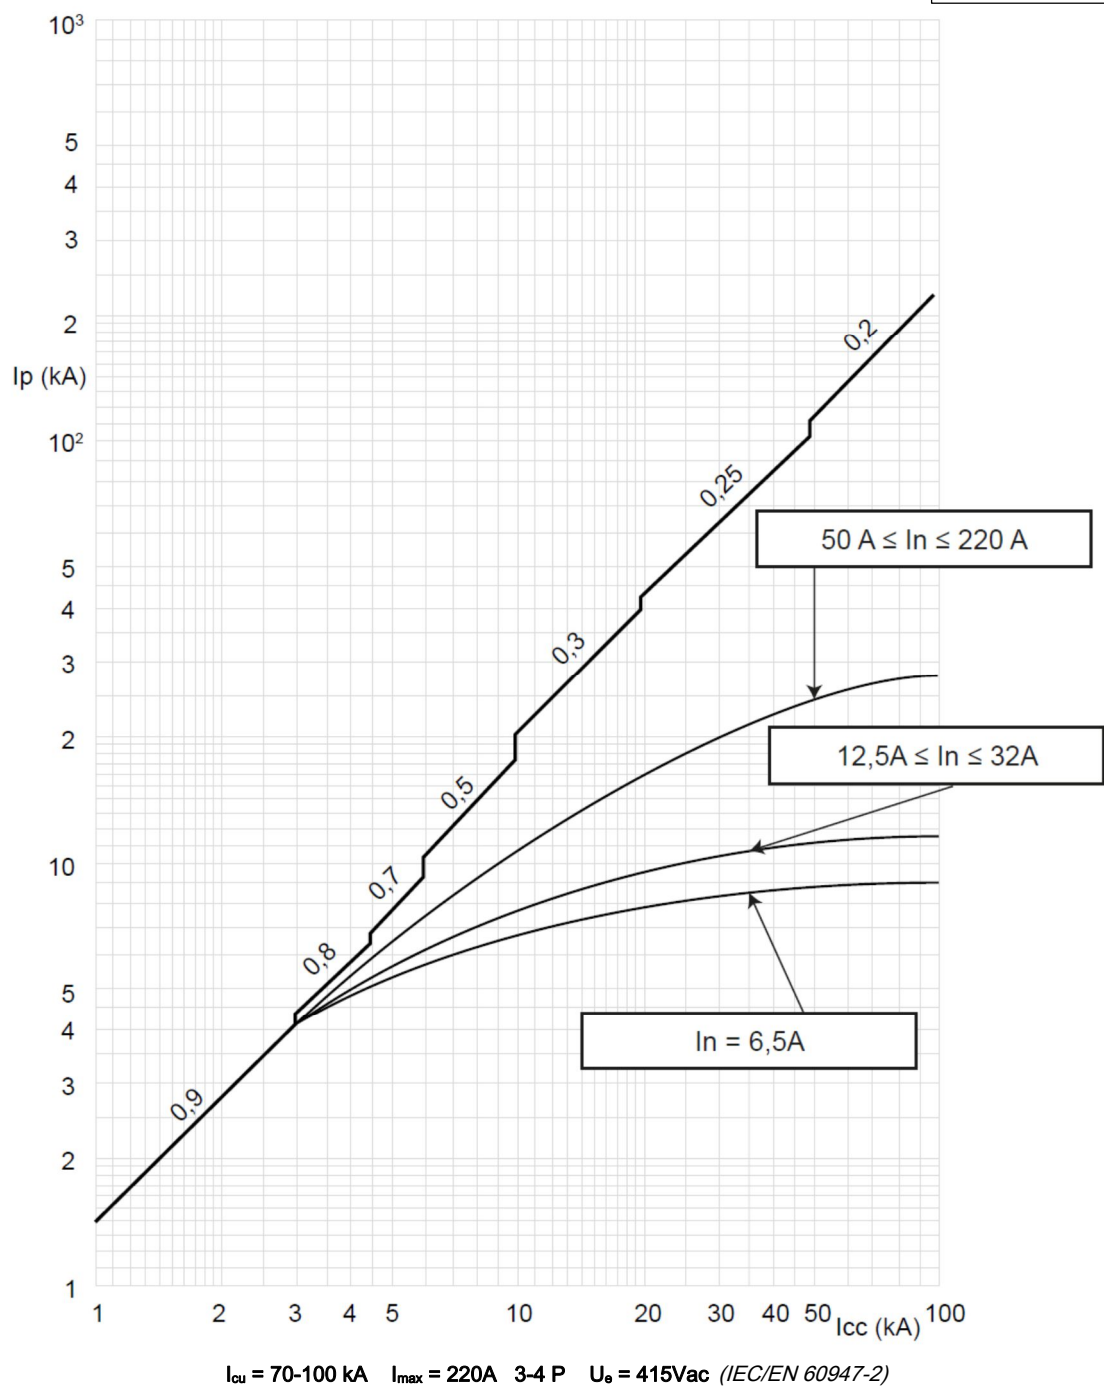

Value	Description
I_{cc}	estimated short circuit symmetrical current (RMS value)
I_p	maximum short circuit peak current
	maximum prospective short circuit peak current
	corresponding at the power factor
	maximum real peak short circuit current

Megatiker MP3 250 only magnetic circuit breakers

Reference(s) :

T733F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734F6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734N6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734H6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T733L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP; T734L6MP / 12MP / 25MP / 32MP / 50MP / 80MP / 100MP / 160MP / 220MP;

A) Derating Temperature and configurations


	Ambient temperature									
	30 °C		40 °C		50 °C		60 °C		70 °C	
Fixed version	I_{max} (A)	I_r / I_n	I_{max} (A)	I_r / I_n	I_{max} (A)	I_r / I_n	I_{max} (A)	I_r / I_n	I_{max} (A)	I_r / I_n
Cage terminals, flexible cable	220	1	220	1	220	1	198	0.90	187	0.85
Lugs, flexible cable	220	1	220	1	220	1	209	0.95	198	0.90
Spreaders, flexible cable	220	1	220	1	220	1	209	0.95	198	0.90
Plug-in/draw-out version	I_{max} (A)	I_r / I_n	I_{max} (A)	I_r / I_n	I_{max} (A)	I_r / I_n	I_{max} (A)	I_r / I_n	I_{max} (A)	I_r / I_n
Cage terminals, flexible cable	220	1	198	0.90	198	0.90	187	0.85	165	0.75
Rear flat terminals, flexible cable	-	-	-	-	-	-	-	-	-	-
Rear flat terminals, Cu bars, vertical	-	-	-	-	-	-	-	-	-	-

For further technical information, please contact Legrand technical support.


B) Breaking capacity in DC (kA)

I_{cu} (kA)	I_n (A)	1 pole *	2 poles in series *				3 poles in series *		
		60 V	60 V	110 V	250 V	110 V	250 V	500 V	
36	6.3 ÷ 220	35	36	35	10	36	10	10	
50	6.3 ÷ 220	35	50	35	10	50	10	10	
70	6.3 ÷ 220	35	50	35	10	50	10	10	
100	6.3 ÷ 220	35	50	35	10	50	10	10	


These values are applied to DC networks insulated from the ground (*this diagram applies to both 3P and 4P circuit breakers*):

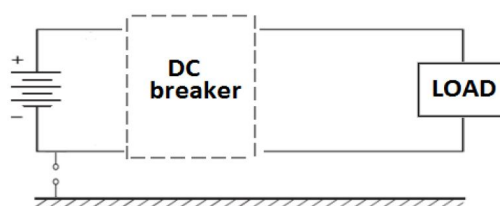


* Connection modality of the DC breaker:



1 pole



2 poles in series



3 poles in series