



MÀTIX QUINZIÑO^{MX}

Flush wireless switches


AM4570CWI - AM4574CWI - AM4003CWI - AM4027CWI
QZ4570CWI - QZ4574CWI - QZ4003CWI - QZ4027CWI




AM4003CWI



AM4027CWI



AM4570CWI



AM4574CWI

Use

It is equipped with 2 buttons for activating Home / Away - Wake up / Sleep scenarios or ON/OFF control of one or more connected switches or control of one or more connected rolling shutter switches.
Scenarios can be customized by the Home + Control app.
Flush installation into a flush mounting box. Integrated LED for low battery indication.
- 1 module.

Range

Designation	Cat. Nos.
All controls, with battery. Equipped with an LED indicator (configuration) and a RESET button (hidden) used to return to factory settings.	AM4570CWI
	AM4574CWI
	AM4003CWI
	AM4027CWI
	QZ4570CWI
	QZ4574CWI
	QZ4003CWI
	QZ4027CWI

Colours code:

☐ White

Technical characteristics

- Mechanical characteristics

Protection against impacts: IK 02
Protection against solid bodies/liquids: IP 20 without plate and rocker plate

- Material characteristics

Mechanism casing ABS
Mechanism functional cover: PC

Halogen-free
UV resistant

Self-extinguishing: 650°C/30 s

- Electrical characteristics

Powered by a CR2032 - 3 V lithium battery (supplied)
Battery life: 8 years for 10 activations a day
ZigBee radio technology frequency: 2.4 GHz to 2.4835 GHz
Wireless mesh network, self-adaptive and secure (AES 128), conforming to standard IEEE 802.15.4 (LR-WPAN)
Power level: < 100 mW


- Climate characteristics

Usage temperature: +5°C to +45°C
Storage temperature: 0°C to +45°C

Standards and approvals


The undersigned, BTICINO, declares that the radio-electric equipment type (AM4570CWI-AM4574CWI-AM4003CWI-AM4027CWI-QZ4570CWI-QZ4574CWI-QZ4003CWI-QZ4027CWI) complies with directive 2014/53/EU. The full text of the EU declaration of conformity is available on the following website: www.bticino.it/red

Overall dimensions (mm)

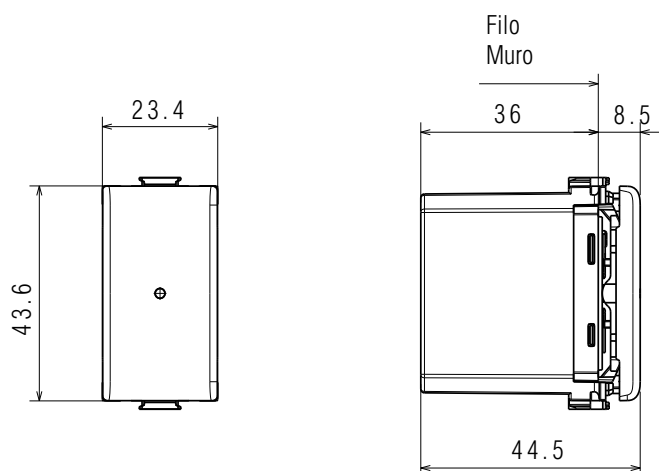


Operation

Front view

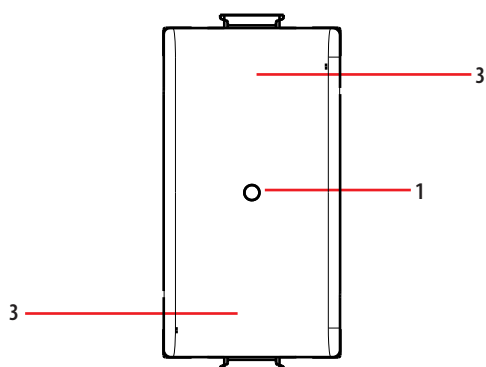

Front view without coverkey

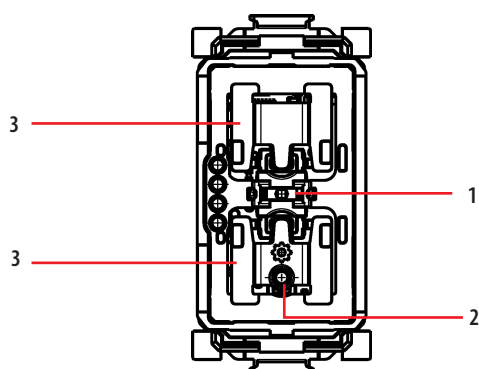

Legend

- 1. LED indicator: useful during installation
- 2. RESET button used to return to factory settings
- 3. Control pushbutton

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

The plates must not be painted.



Take care to recycle the battery appropriately.

RAEE/WEEE: bticino.com/disposal