



LF-GAD240-10000-24 5-in-1 Dimming LED Driver

## Features

- DALI DT6/PUSH/0-10V/PWM/Rx dimmable
- Built-in active PFC function
- Standby power consumption <0.5W
- Flicker free
- All-round protections: over current protection and short circuit protection
- IP20
- Suitable for Class I light fixtures
- 5-year warranty (please refer to the warranty condition)



## Applications


· Indoor office lighting · decorative lighting · commercial lighting · residential lighting

## Descriptions

LF-GAD240-10000-24 is a 240W DALI DT6/PUSH/0-10V/PWM/Rx dimmable constant voltage LED driver featuring constant voltage output 24Vdc and maximum load current 10A. Its input voltage ranges from 220 to 240Vac and it has all-round protections: over current protection and short circuit protection.

## Product Model

LF - GAD 240 - 10000 - 24

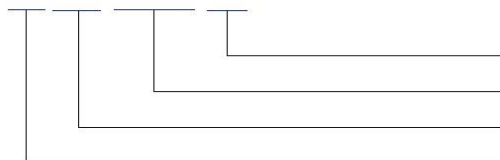

- 24: output voltage: 24V
- 10000: max. output current: 10000mA
- 240: output power: 240W
- GAD: 5-in-1 dimming LED driver

## Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.

Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.

Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

## ■ Electrical Characteristics

| Model                      |                                    | LF-GAD240-10000-24                                                                                                              |     |     |     |     |
|----------------------------|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|-----|
| Output                     | Output Voltage                     | 24V                                                                                                                             |     |     |     |     |
|                            | Output Current                     | 10A max.                                                                                                                        |     |     |     |     |
|                            | Flicker Index (Modulation Depth)   | IEC-Pst $\leq 1$ , CIE SVM $\leq 0.9$ , modulation depth $\leq 1\%$<br>Complies with flicker-free standard (IEEE Std 1789-2015) |     |     |     |     |
|                            | Ripple Voltage                     | $< 10\%$                                                                                                                        |     |     |     |     |
|                            | Voltage Tolerance                  | $\pm 3\%$                                                                                                                       |     |     |     |     |
|                            | Temperature Drift                  | $\pm 10\%$                                                                                                                      |     |     |     |     |
|                            | Start-up Time                      | $< 1.5S$                                                                                                                        |     |     |     |     |
| Input                      | Input Voltage                      | 220-240Vac (voltage limit: 198-264Vac)                                                                                          |     |     |     |     |
|                            | DC Input Voltage                   | 180-264Vdc                                                                                                                      |     |     |     |     |
|                            | Input Frequency                    | 47-63Hz                                                                                                                         |     |     |     |     |
|                            | Input Current                      | 1.6A max.                                                                                                                       |     |     |     |     |
|                            | PF                                 | $\geq 0.9$                                                                                                                      |     |     |     |     |
|                            | THD                                | $\leq 10\%$                                                                                                                     |     |     |     |     |
|                            | Efficiency                         | $\geq 93\%$                                                                                                                     |     |     |     |     |
|                            | Inrush Current                     | $\leq 90A \& 390uS @ 230Vac$                                                                                                    |     |     |     |     |
|                            | Load Quantities of Circuit Breaker | Model                                                                                                                           | B10 | C10 | B16 | C16 |
|                            |                                    | Quantity (pcs)                                                                                                                  | 2   | 4   | 5   | 8   |
|                            | Leakage Current                    | $\leq 0.7mA$                                                                                                                    |     |     |     |     |
|                            | Standby Power Consumption          | $\leq 0.5W$ (light off)                                                                                                         |     |     |     |     |
| Protection Characteristics | Over Voltage                       | $< 33V$                                                                                                                         |     |     |     |     |
|                            | Short Circuit                      | Hiccup mode (auto-recovery)                                                                                                     |     |     |     |     |
| Environment Descriptions   | Operating Temperature              | $-20^{\circ}C - +50^{\circ}C$                                                                                                   |     |     |     |     |
|                            | Operating Humidity                 | 20-90%RH (no condensation)                                                                                                      |     |     |     |     |
|                            | Storage Temperature/ Humidity      | $-30^{\circ}C - 80^{\circ}C$ (6 months in Class I environment); 20-95%RH (no condensation)                                      |     |     |     |     |
|                            | Atmospheric Pressure               | 86-106kPa                                                                                                                       |     |     |     |     |

Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.

Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.

Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

2

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY  
Tel. +39 02.25117310 Fax +39 02.25117610 sito internet: [www.elcart.com](http://www.elcart.com) e-mail: [tecnico@elcart.it](mailto:tecnico@elcart.it)

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.  
The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to the performances and the use of the product.  
La divulgación de los datos contenidos en esta ficha son un servicio unicamente informativo y no constituyen ningun vínculo de parte de Elcart respecto a las prestaciones y uso del producto.

## ■ Electrical Characteristics

|                  |                               |                                                                                                                                                                                                                                                                                                                                                                   |
|------------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety & EMC     | Certifications                | TUV-ENEC, CE, CB, RCM, CCC                                                                                                                                                                                                                                                                                                                                        |
|                  | Withstanding Voltage          | I/P-O/P: 3.75kV 5mA 60S; I/P-PE: 1.5kVac, <5mA 60S;<br>O/P-PE: 0.5kVac, <5mA 60S                                                                                                                                                                                                                                                                                  |
|                  | Insulation Resistance         | I/P-O/P: >100MΩ@500Vdc; I/P-PE: 500Vdc, >100MΩ;<br>O/P-PE: 500Vdc, >100MΩ                                                                                                                                                                                                                                                                                         |
|                  | Safety Standards              | ENEC: EN61347-1: 2015, EN61347-2-13: 2014/A1: 2017,<br>EN62384 2016/A1: 2009<br>CCC: GB19510.1-2009, GB19510.14-2009<br>RCM: AS61347.2-13: 2018<br>SAA: AS61347.2-13: 2018<br>CE-LVD: EN61347-2-13: 2014/A1: 2017, EN61347-1: 2015, EN62493: 2015<br>CB: IEC61347-1: 2015, IEC61347-2-3: 2014, IEC 61347-2-13: 2014/AMD1:<br>2016<br>ErP: EU 2019/2020@2019.12.05 |
|                  | EMI                           | CE-EMC: EN55015, EN61000-3-2, EN61000-3-3<br>CCC: GB/T17743, GB17625.1, GB17625.2                                                                                                                                                                                                                                                                                 |
|                  | EMS                           | CE-EMC/RCM: EN61000-4-2, 3, 4, 5 (L-N: 2kV, L/N-PG: 4kV), 6, 11<br>CCC: GB/T17626.2, 3, 4, 5, 6, 1                                                                                                                                                                                                                                                                |
| Other Parameters | IP Rating                     | IP20                                                                                                                                                                                                                                                                                                                                                              |
|                  | RoHS                          | RoHS 2.0 (EU) 2015/863                                                                                                                                                                                                                                                                                                                                            |
|                  | Warranty                      | 5 years (Tc≤90℃)                                                                                                                                                                                                                                                                                                                                                  |
|                  | Compatibility of DALI Dimming | Yuanhao Master, Philips Master DDBC120-DALI, OSRAM Master, Helvar Master 905 Router, Tridonic Master-24138923, HDL MC64-DALI431 Master                                                                                                                                                                                                                            |
|                  | DALI Standard                 | IEC 62386-101 102 207: DALI 2.0                                                                                                                                                                                                                                                                                                                                   |
|                  | Noise Level                   | ≤29dBA (this data is measured in a soundproof room and the noise collector should be 10CM away from LED driver)                                                                                                                                                                                                                                                   |

### Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.

Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.


Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

## ■ Electrical Characteristics


|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Equipment</b>     | AC power source: CHROMA6530, digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test): Everfine LFA-3000, etc.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Test Remark</b>        | If there are no special remarks, the above parameters are tested at the ambient temperature of 25°C, humidity of 50%, full load and input voltage of 230Vac/50Hz.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Additional Remarks</b> | <ol style="list-style-type: none"> <li>1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.</li> <li>2. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.</li> <li>3. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.</li> <li>4. When using the LED driver, please pay attention that the total output power not exceed the maximum rated output power, otherwise the warranty service of LED driver would be failed.</li> </ol> |

## ■ Product Characteristic Curves

PF Curve

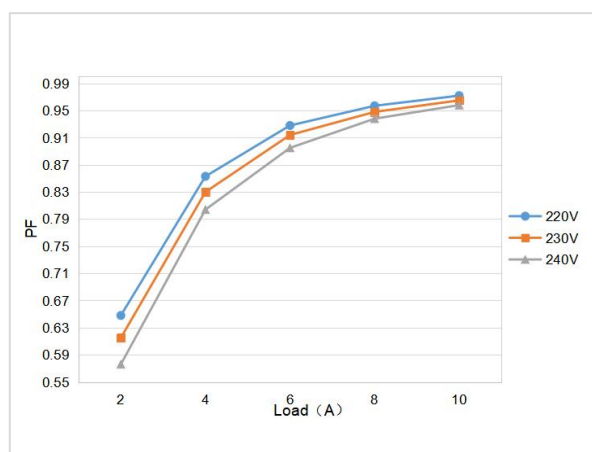

Efficiency Curve

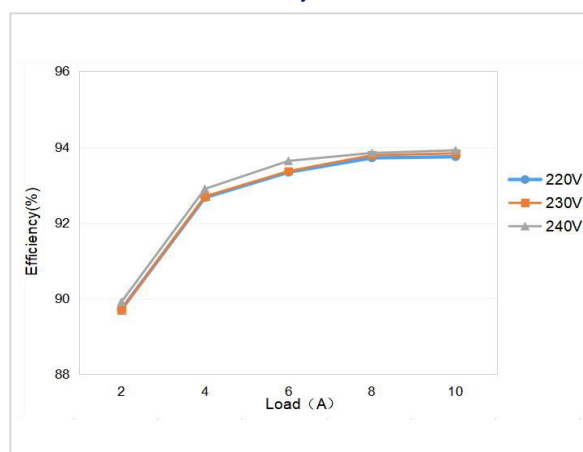


Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.

Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.

Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

■ Product Characteristic Curves

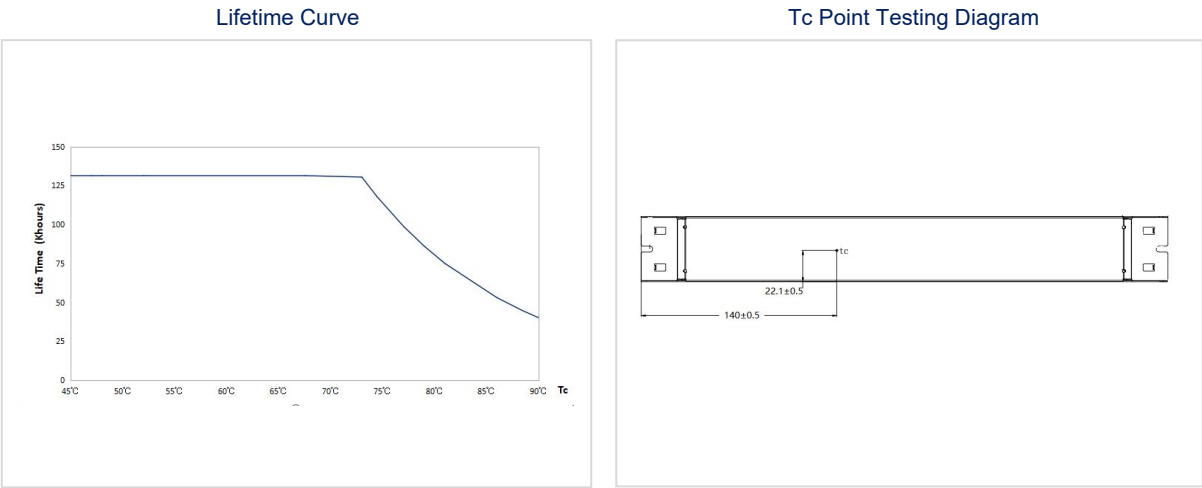

■ Product Definitions

Product Terminals

| INPUT      |                                   | OUTPUT |                                         |
|------------|-----------------------------------|--------|-----------------------------------------|
| PGND       | Earth wire                        | LED+   | Positive electrode output of LED driver |
| AC-L       | Input terminal of AC live wire    | LED+   | Positive electrode output of LED driver |
| AC-N       | Input terminal of AC neutral wire | LED-   | Negative electrode output of LED driver |
|            |                                   | LED-   | Negative electrode output of LED driver |
| DALI2/PUSH | DALI2/PUSH dimming input          | DIM+   | Positive electrode of dimming           |
| DALI1/PUSH | DALI1/PUSH dimming input          | DIM-   | Negative electrode of dimming           |


**Lifud Technology Co., Ltd.**  
Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.  
Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.  
Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

## ■ Dimming Operation Instructions


### 0-10V Dimming Operations

- Connect 0-10V signal to DIM terminal.
- In 0-10V dimming mode, when the input voltage is  $0.3V \pm 0.1$ , the light turns off; when it's  $0.5V \pm 0.1$ , the light turns on.
- Dimming depth: 0.3% (typical value) (max. output current)
- DIM+/DIM- (without signal connected): 100% rated current output


### Wiring Diagram of 0-10V Dimming

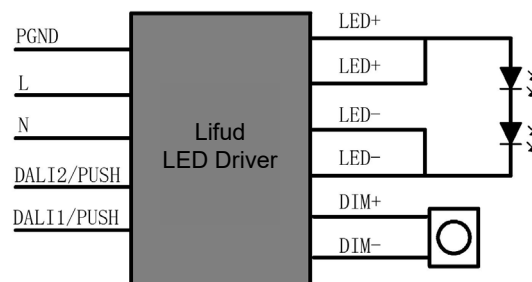

### 0-10V Dimming Curve of Dim-to-off Version (linear)

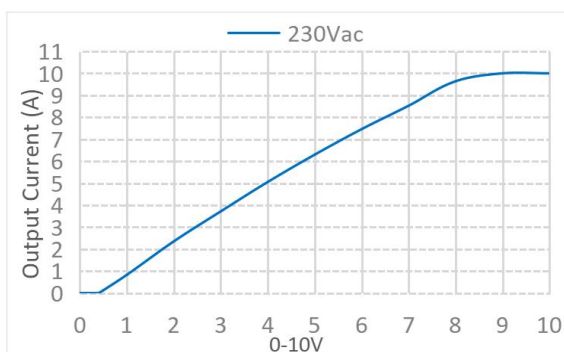

### 0-10V Dimming Curve of Dim-to-off Version (logarithmic)

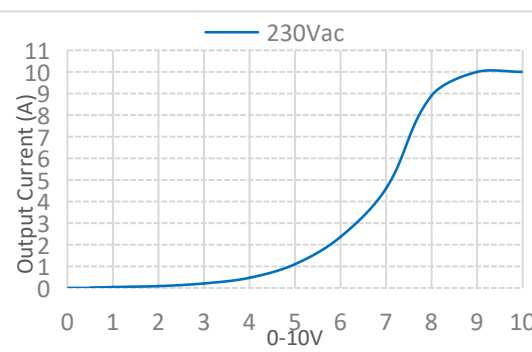

Input: 230Vac; output: 24Vdc/10mA  
(this data is measured by Lifud 0-10V dimmer and the chart is for reference only)

### Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.

Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.


Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

## ■ Dimming Operation Instructions


### PWM Dimming Operations

- Connect PWM signal to DIM terminal.
- Compatible signal frequency: 0.4-3kHz; amplitude: 9-10(V); when it's 2.8%-5.6%, the light turns off; when it's 4.8%-7.3%, the light turns on.
- Dimming depth: 0.3% (max. output current)
- DIM+/DIM- (without signal connected): 100% rated current output


### Wiring Diagram of PWM Dimming

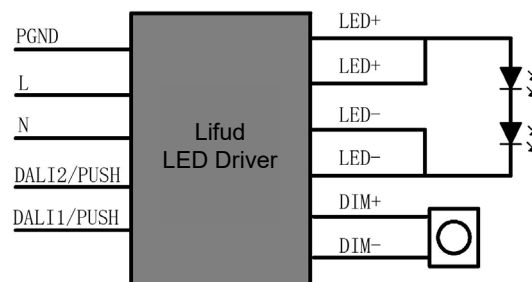

### PWM Dimming Curve of Dim-to-off Version (linear)

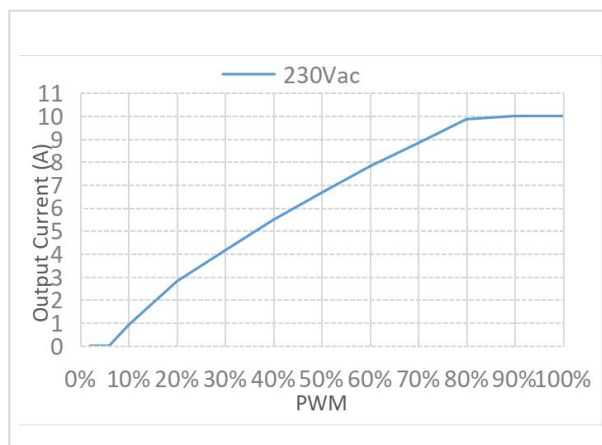

### PWM Dimming Curve of Dim-to-off Version (logarithmic)

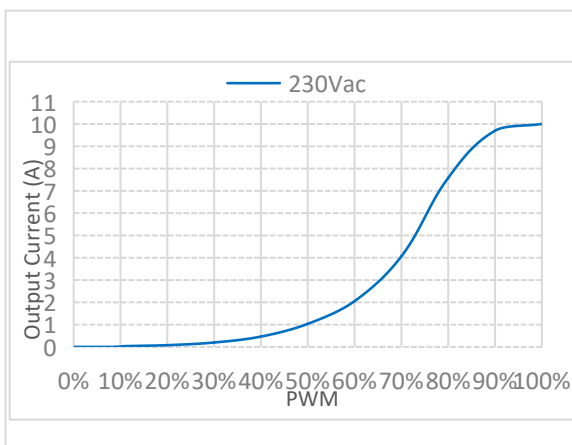

Input: 230Vac; output: 24Vdc/10mA

(this data is measured by PWM signal generator RIGOL and the chart is for reference only)

### Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.

Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.


Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

## ■ Dimming Operation Instructions


### Rx Dimming Operations

- Connect Rx signal to DIM terminal.  
When the resistance is  $4 \pm 1\text{K}\Omega$ , the light turns on;  
when it's  $3 \pm 1\text{K}\Omega$ , the light turns off.
- Range: 0-100K $\Omega$
- Dimming depth: 0.3% (max. output current)
- DIM+/DIM- (without signal connected): 100% rated current output


### Wiring Diagram of Rx Dimming

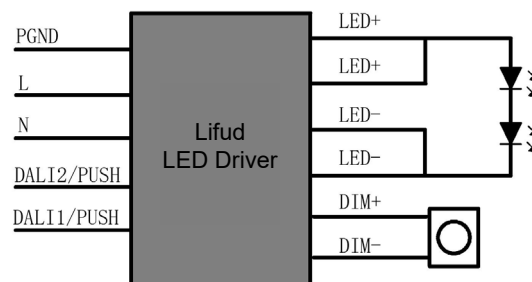

### Rx Dimming Curve of Dim-to-off Version (linear)

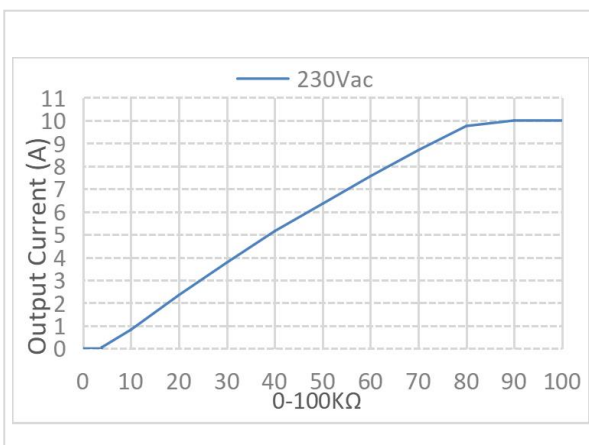

### Rx Dimming Curve of Dim-to-off Version (logarithmic)

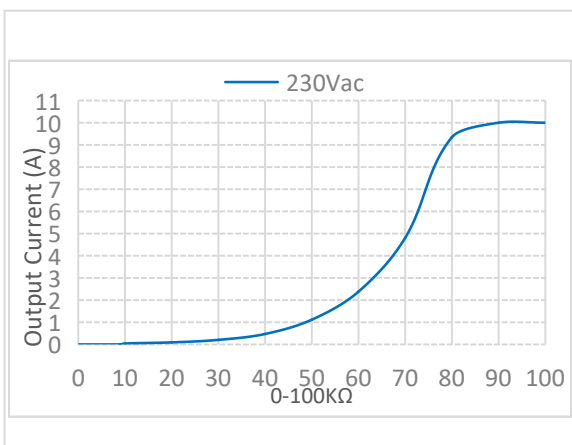

Input: 230Vac; output: 24Vdc/10mA  
(this data is measured by LEVITON dimmer and the chart is for reference only)

### Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.

Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.


Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

## ■ Dimming Operation Instructions


### DALI Dimming Operations

- Default setting: 100% brightness
- Connect DALI signal to DA1/PUSH & DA2/PUSH terminals.
- DALI protocol includes 16 groups
- Max. quantity of drivers connected in parallel in DALI dimming mode: 64 pcs.
- Min. dimming depth of DALI dimming: 0.3% (max. output current)


### Wiring Diagram of DALI Dimming

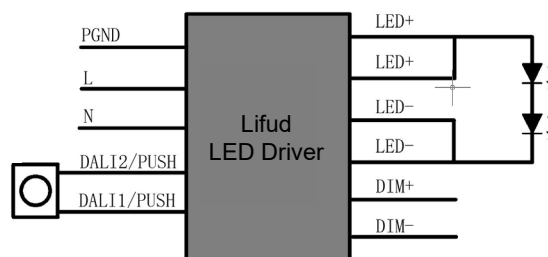

### DALI Dimming Curve (linear)

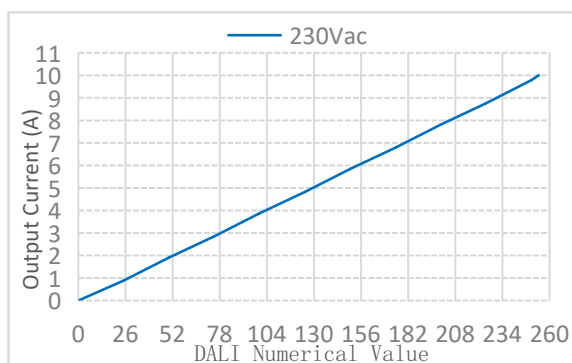

### DALI Dimming Curve (logarithmic)

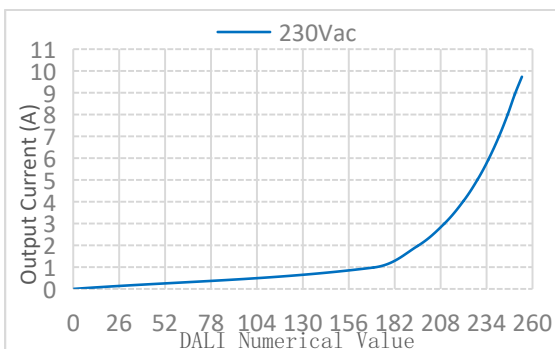

### Lifud Technology Co., Ltd.


Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.

Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.

Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

## ■ Dimming Operation Instructions

### Wiring Diagram of PUSH Dimming

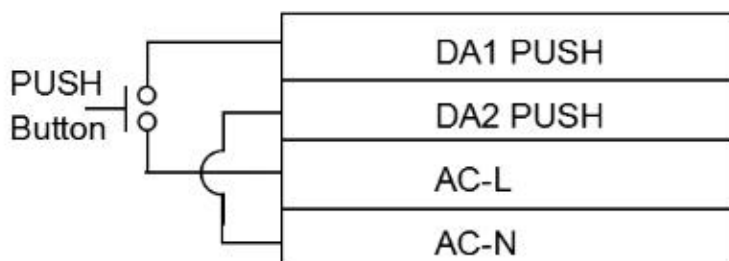

### PUSH Dimming Operations

| Operation    | Duration    | Function                |
|--------------|-------------|-------------------------|
| Instant Push | 0.1-0.5 sec | LED light on/off        |
| Long Push    | 0.6-9 sec   | Dim up/down the light   |
| Reset Push   | >9 sec      | Reset to 50% brightness |

- The PUSH operation won't cause any variations on LED driver if it's less than 0.1S.
- Connect the PUSH switch in series between AC-L and DA1/PUSH terminals; short circuit AC-N and DA2/PUSH terminals.
- Min. dimming depth of PUSH dimming: 1% (max. output current)
- The PUSH dimming mode has the memory function in case of any power failure. When the LED driver is powered on again, the light will return to the previous state before power failure.

### Switching of Dimming Mode

- Default setting: DALI logarithmic dimming mode; use DALI programming software to switch to linear dimming mode
- **Switch to PUSH dimming mode**  
After powering the driver on by AC for 2 secs, long press the PUSH button and keep it for more than 3 secs.
- **Switch to 0-10V/PWM/Rx dimming mode**  
After powering the driver on by AC for 2 secs, adjust the 0-10V/PWM/Rx dimmer (from max. to min. or min. to max.) and wait for 1 sec
- **Switch to DALI dimming mode**  
After powering the driver on by AC for 2 secs, press the DALI dimmer for ON/OFF operation.  
(When switching from DALI dimming mode to others, the DALI light must be on; if the DALI light is off, the dimming mode cannot be switched by default.)

### Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.



Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.

Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

## ■ Structure & Dimensions (unit: mm)

### Overall Appearance

| Model              | Overall Appearance (L*W*H) | Distance Between 2 Positioning Holes | Diameter of Positioning Hole |
|--------------------|----------------------------|--------------------------------------|------------------------------|
| LF-GAD240-10000-24 | 410.1*46.2*34 mm           | 364.6 mm                             | 4.2 mm                       |

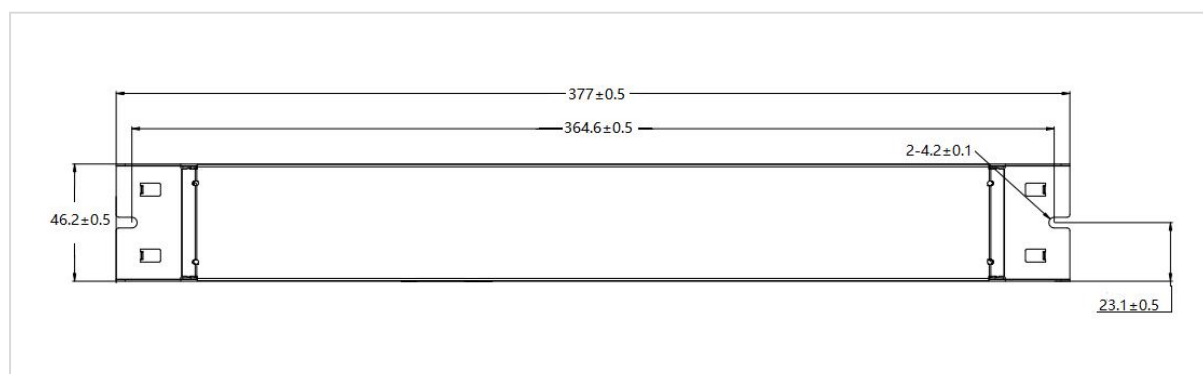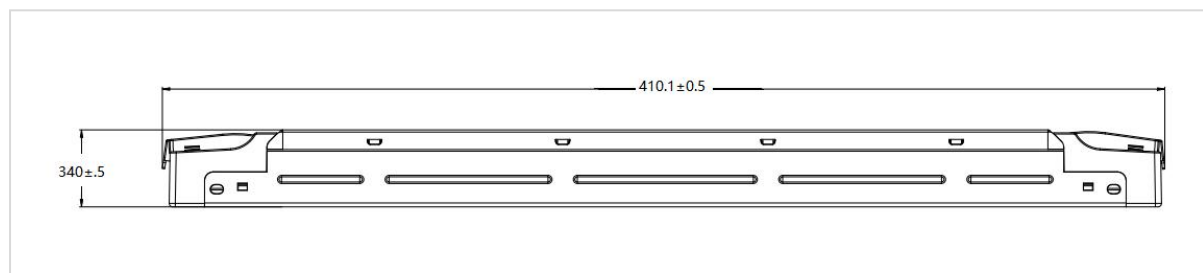

## ■ Packaging Specifications

| Model       | LF-GAD240-10000-24                    |
|-------------|---------------------------------------|
| Carton Size | 426*319*150 mm (L*W*H)                |
| Quantity    | 6 pcs/layer; 3 layers/ctn; 18 pcs/ctn |
| Weight      | 0.75±0.1% kg/pc; 13±0.5 kg/ctn        |

### Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.

Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.

Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)



LF-GAD240-10000-24 5-in-1 Dimming LED Driver

## ■ Transportation and Storage

### 1. Transportation

- Suitable transportation means: vehicles, boats and aeroplanes.
- In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

### 2. Storage

- The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

## Cautions

- Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.
- Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.
- Man-made damage is beyond the scope of Lifud warranty service.

Remark: Lifud Tecnology Co., Ltd. reserves the right to interpret any contents of this specification.



### Informazione agli utenti ex art. 26 D.Lgs. 49/2014

Il simbolo riportato sull'apparecchiatura (Allegato IX D.Lgs. 49/2014) indica che il rifiuto deve essere oggetto di "raccolta separata" e che è stato immesso sul mercato, in Italia, dopo il 31/12/2010. Pertanto, l'utente dovrà conferire (o far conferire) il rifiuto ai centri di raccolta differenziata predisposti dalle amministrazioni locali, oppure consegnarlo al rivenditore contro acquisto di una nuova apparecchiatura di tipo equivalente.

L'utente ha dunque un ruolo attivo: la raccolta differenziata del rifiuto e le successive operazioni di trattamento, recupero e smaltimento favoriscono la produzione di apparecchiature con materiali riciclati e limitano gli effetti negativi sull'ambiente e sulla salute eventualmente causati da una gestione impropria del rifiuto.

Nel caso di RAEE di piccolissime dimensioni (<25 cm), l'utente ha diritto al conferimento gratuito, senza obbligo di contestuale acquisto, ai distributori al dettaglio la cui superficie di vendita specializzata eccede i 400 mq.



IMPORTATO E DISTRIBUITO DA  
ELCART DISTRIBUTION SPA  
Via Michelangelo Buonarroti, 46  
20093 COLOGNO MONZESE (MI)  
ITALY  
[www.elcart.com](http://www.elcart.com) - [info@elcart.it](mailto:info@elcart.it)

Made in China

### Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.

Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.

Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

12

ELCART DISTRIBUTION SPA via Michelangelo Buonarroti, 46 - 20093 Cologno Monzese (Milano) ITALY  
Tel. +39 02.25117310 Fax +39 02.25117610 sito internet: [www.elcart.com](http://www.elcart.com) e-mail: [tecnico@elcart.it](mailto:tecnico@elcart.it)

La divulgazione dei dati contenuti in questa scheda è da ritenersi un servizio puramente informativo e non costituisce alcun vincolo da parte della Elcart in merito a prestazioni ed utilizzo del prodotto.  
The divulgation of data contained on this technical sheet are exclusively for informational reasons and establish no link on behalf of Elcart regard to the performances and the use of the product.  
La divulgación de los datos contenidos en esta ficha son un servicio unicamente informativo y no constituyen ningun vínculo de parte de Elcart respecto a las prestaciones y uso del producto.