


LED Intelligent Driver (constant voltage)

- Small size and light weight. The housing is made from V0 flame retardant PC materials that SAMSUNG/COVESTRO uses.
- The clamshell design and screwless type for strain-relief. The design of dismountable end cap allows you to adjust the length of housing depending on your needs.
- Automatically recognize 0-10V and 1-10V input signals.
- Ultra-low consumption of 0-10V ports < 0.05mA.
- Dimming range: 0~100%, LED dimming starts at 0.1%.
- With soft-on and fade-in function, bring more comfortable visual experiences.
- High-performance drivers: Efficiency 93%, PF>0.98, THD<6%.
- Dimming interfaces have photoelectric isolation that are compliant with the latest safety standards and more secure and reliable.
- Comply with the ERP directive of EU energy efficiency, stand-by power consumption 0.5W.
- Innovative thermal management technology, has intelligent protection of driver lifetime.
- Over-heat / Over voltage / Over load / Short circuit protection, recover automatically.
- The design of dismountable end covers is for convenient adjustments of length of drivers.
- Suitable for lamp applications of indoor I / II / III types.
- Up to 50,000-hour life time.
- 5 years warranty (Rubycon Capacitor).

5 in 1 dimming

0-10V
1-10V
10V PWM
RX
Push DIM

Ultra-low consumption of 0-10V ports: < 0.05mA.

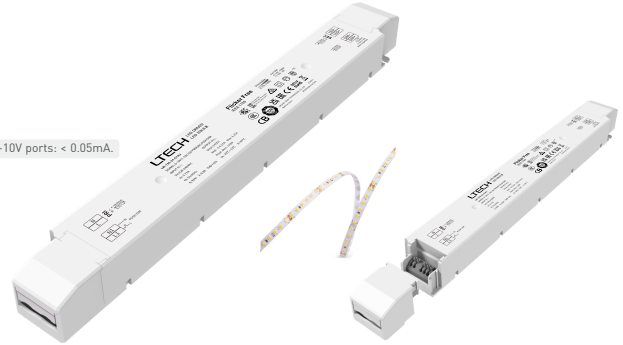Flicker-free
IEEE 1789Dimmable:
0.1%-100%


Technical Specs

Model		LM-150-24-G1A2		LM-150-12-G1A2	
OUTPUT	Output Voltage	24Vdc		12Vdc	
	Output Voltage Range	24Vdc \pm 0.5Vdc		12Vdc \pm 0.5Vdc	
	Output Current	Max. 6.25A		Max. 12.5A	
	Output Power	Max. 150W			
	Output Power Range	0~150W			
	Strobe Level	High frequency exemption level			
	Dimming Range	0~100%, down to 0.1%			
	Overload Power Limitation	$\geq 102\%$			
	Ripple	Switch ripple ≤ 200 mV, noise ≤ 500 mV		Switch ripple ≤ 200 mV, noise ≤ 800 mV	
	PWM frequency	3600Hz			
INPUT	Dimming Interface	0-10V(1-10V/10V PWM/RX), Push DIM			
	Input Voltage	220-240Vac 200-280Vdc			
	Frequency	50/60Hz			
	Input Current	≤ 0.75 A/230Vac			
	Power Factor	PF>0.98/230Vac (at full load)			
	THD	THD<6% $\text{\textcircled{230Vdc}}$ (at full load)			
	Efficiency (typ.)	93%		92%	
	Standby Power Loss	0.5W			
	Inrush Current	Cold start 45A/230Vac			
ENVIRONMENT	Anti Surge	L-N: 2KV			
	Leakage Current	Max. 0.5mA			
	Working Temperature	ta: -20 ~ 50°C tc: 85°C			
	Working Humidity	20 ~ 95%RH, non-condensing			
	Storage Temperature, Humidity	-40 ~ 80°C, 10~95%RH			
	Temperature Coefficient	$\pm 0.03\%/^{\circ}\text{C}$ (0-50°C)			
	Vibration	10~500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively			
	Overheat Protection	Intelligently adjust or turn off the output current if the PCB temperature $\geq 110^{\circ}\text{C}$, and recover automatically			
	Overload Protection	Shut down the output when current load $\geq 102\%$, and recover automatically			
PROTECTION	Short Circuit Protection	Enter hiccup mode if short circuit occurs, and recover automatically			
	Overvoltage Protection	Shut down the output when non-load voltage ≥ 28 V, and recover automatically		Shut down the output when non-load voltage ≥ 16 V, and recover automatically	
	Withstand Voltage	I/P-O/P: 3750Vac			
	Isolation Resistance	I/P-O/P: 100MQ/500VDC/25°C/70%RH			
SAFETY & EMC	Safety Standards	CCC	China	GB19510.1, GB19510.14	
		TUV	Germany	EN61347-1, EN61347-2-13, EN62493	
		CB	CB member states	IEC61347-1, IEC61347-2-13	
		CE	European Union	EN61347-1, EN61347-2-13, EN62384, EN61547	
		KC	Korea	KC61347-1, KC61347-2-13	
		EAC	Russia	IEC61347-1, IEC61347-2-13	
		RCM	Australia	AS 61347-1, AS 61347-2-13	
		EMEC	Europe	EN61347-1, EN61347-2-13, EN62384	
	EMC Emission	UKCA	Britain	BS EN 61347-2-13:2014+A1:2017, BS EN 61347-1:2015+A1:2021	
		CCC	China	GB/T17743, GB17625.1	
		CE	European Union	EN55015, EN61000-3-2, EN61000-3-3, EN61547	
		KC	Korea	KN15, KN61547	
		EAC	Russia	IEC62493, IEC61547, EH55015	
		RCM	Australia	EN55015, EN61000-3-2, EN61000-3-3, EN61547	
		UKCA	Britain	BS EN IEC 55015:2019/A11:2020, BS EN 61547:2009, BS EN IEC 61000-3-2:2019, BS EN 61000-3-3:2013/A1:2019	
	EMC Immunity	EN61000-4-2, 3, 4, 5, 6, 8, 11, EN61547			
	Strobe Test Standard	IEEE 1789			
OTHERS	Gross weight[G.W]	430g \pm 10g			
	Dimensions	352 \times 43 \times 30mm(L \times W \times H)			
	Package size	355 \times 44 \times 33mm(L \times W \times H)			
	Carton Size	370 \times 340 \times 93mm(L \times W \times H) 20pcs/ctn 9.4kg \pm 5%/ctn			

The driver is suitable for connecting resistor current-limiting LED fixture (e.g. LED strip). The inrush current will be dozens of times increased if connecting built-in constant current IC current-limiting LED fixtures, the driver will activate the overloaded protection (hiccups flickering). When you order, please remark controlling the constant current LED fixture (e.g. MR16 lamp, underground light, LED wall washer, constant current LED strip, etc.), so that we can prepare them with special procedures.


Dimensions

Unit: mm

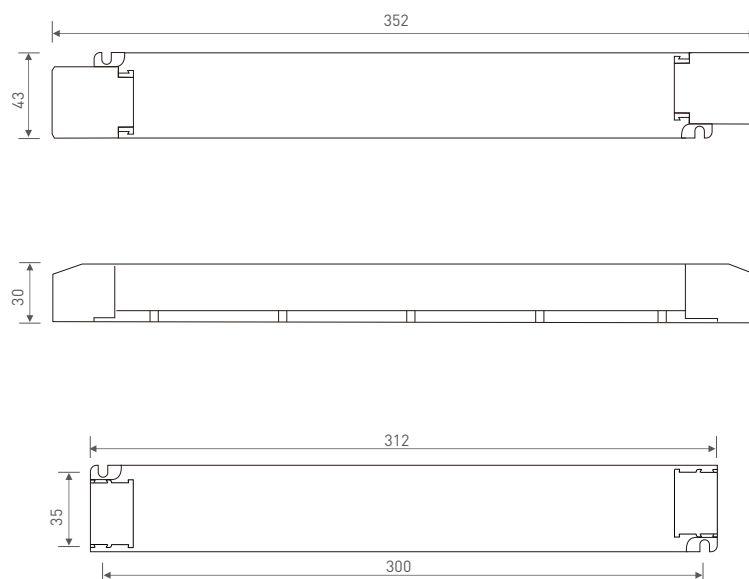


Wiring Diagram

0-10V Connection

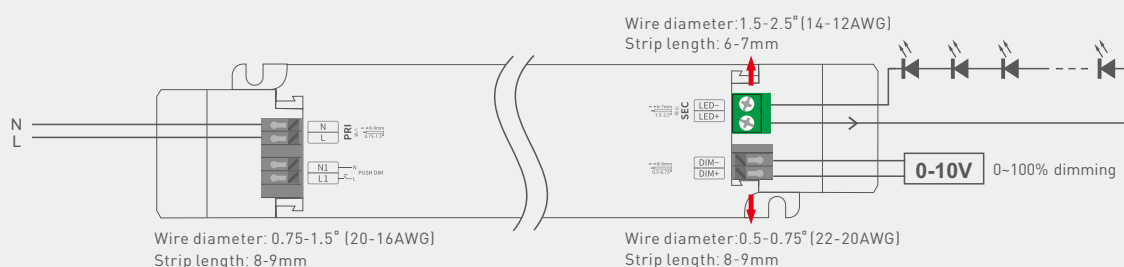

Push DIM Connection

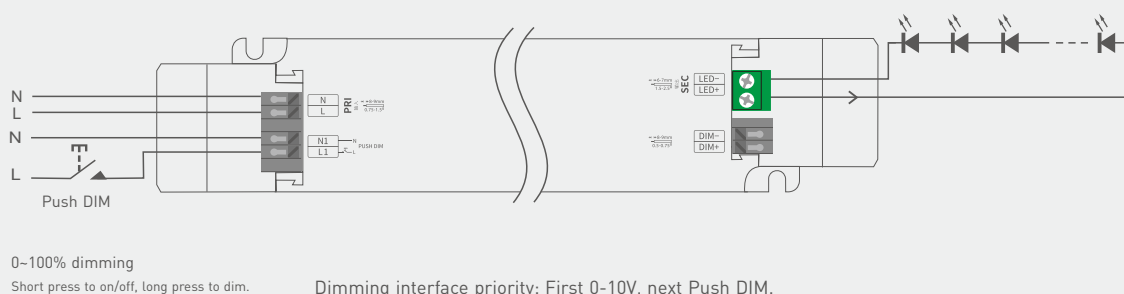

Push DIM




Reset switch


- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the light level goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning off and on again.

Application of Protective Cover


Wire pressing board:




Push the wire pressing board to fix the wires.





Push outward the side plate, meanwhile use the tool to uninstall the wire pressing board.




Uninstall protective cover:





Break off the bottom left and right to remove the protective cover.




Installation Precautions







Please do not stack the products. The distance between two products should be $\geq 15\text{cm}$ so as not to affect heat dissipation and the lifespan of the products.







Please not place the products on LED drivers. The distance between the product and the driver should be $\geq 15\text{cm}$ so as not to affect heat dissipation and shorten the lifespan of the products.



Relationship Diagrams

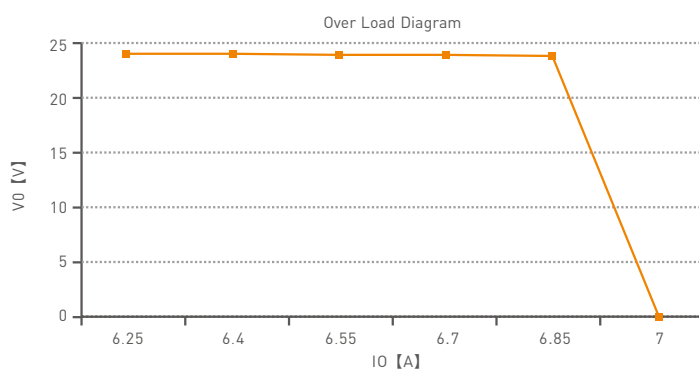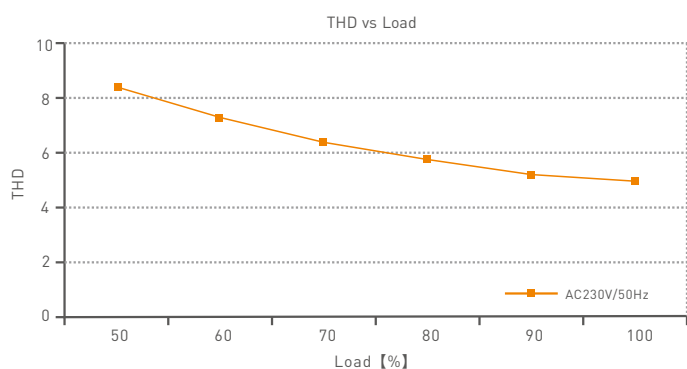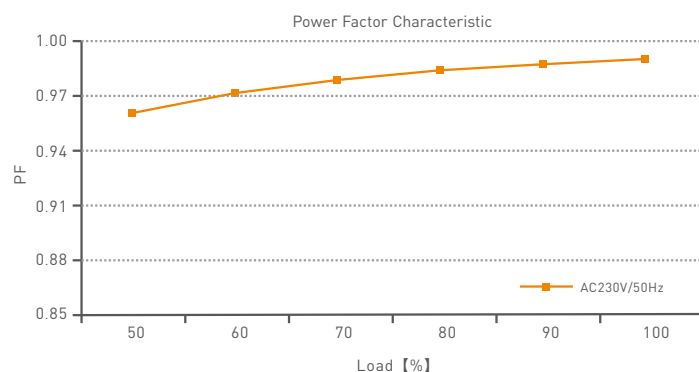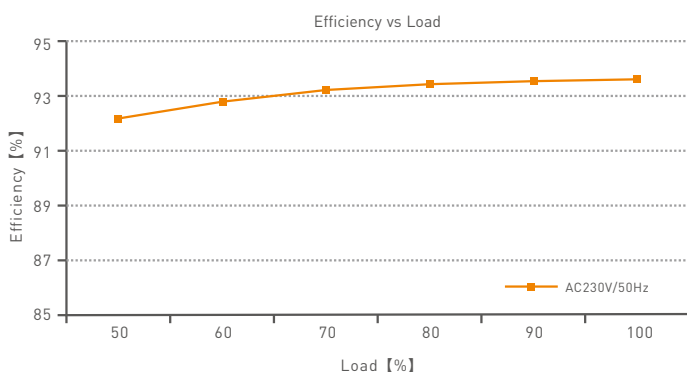


LM-150-24-G1A2

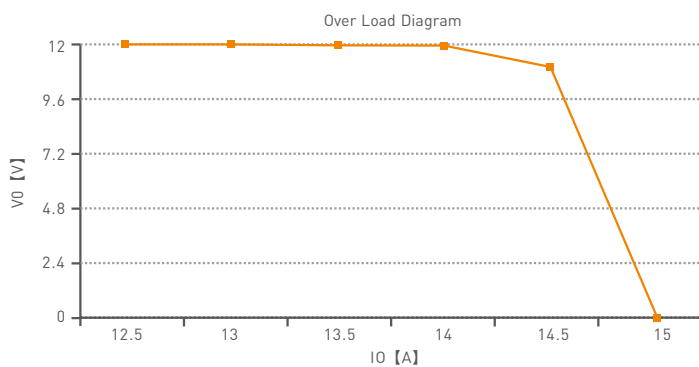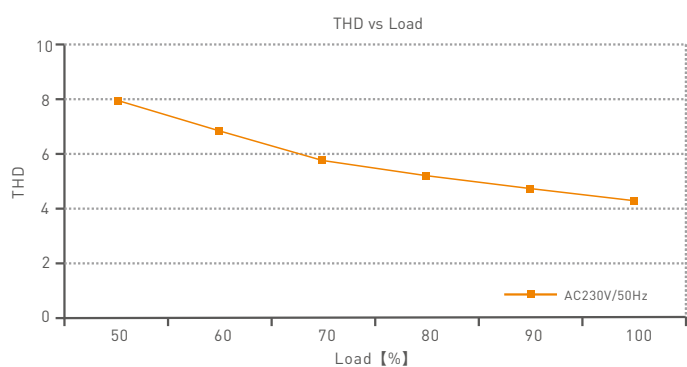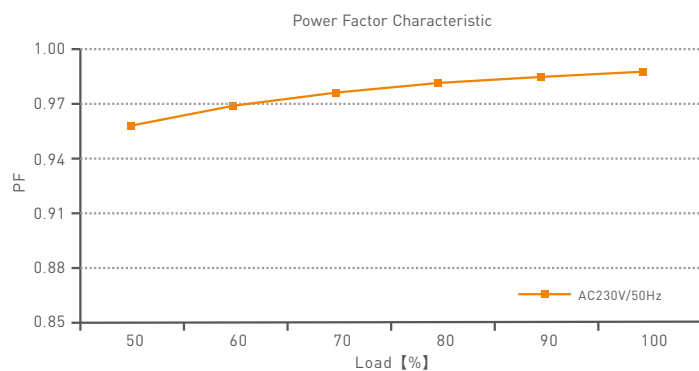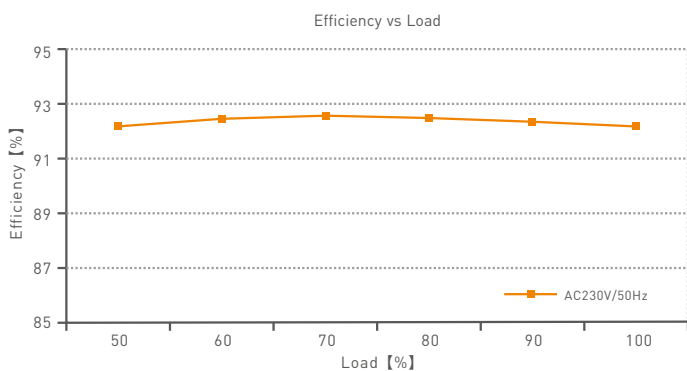

LM-150-12-G1A2

Flicker Test Form

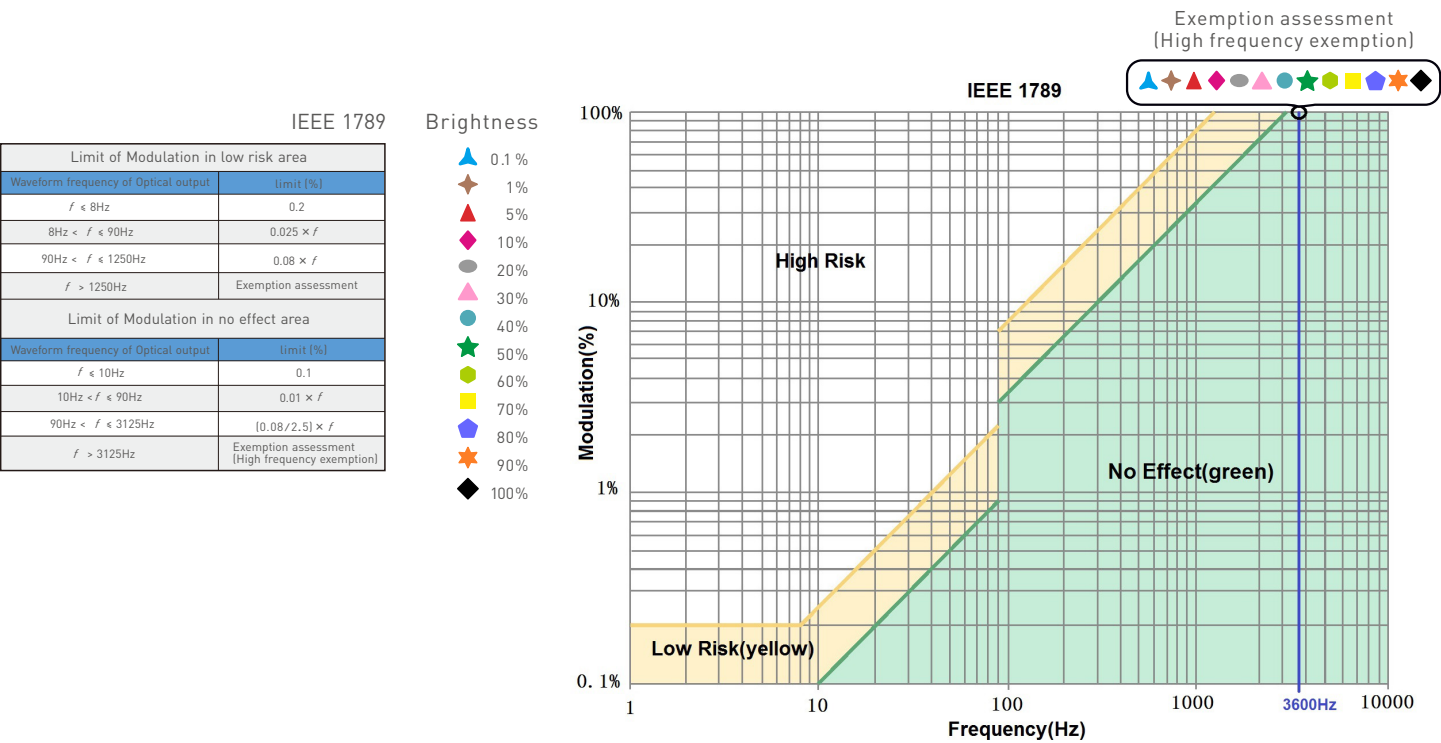

Attentions

- Products shall be installed by qualified professionals.
 - LTECH products are non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
 - Good heat dissipation will extend the working life of products. Please ensure good ventilation.
 - Please check if the working voltage used complies with the parameter requirements of products.
 - The diameter of wire used must be able to load the light fixtures you connect and ensure the firm wiring.
 - Before you power on products, please make sure all the wiring is correct in case of incorrect connection that causes damage to light fixtures.
 - If a fault occurs, please do not attempt to fix products by yourself. If you have any question, please contact your suppliers.
- ※ This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

Update Log

Version	Updated Time	Update Content	Updated by
A0	2019.06.20	Original version	Huang Yunting
A1	2020.03.05	Add flicker test form	Huang Yunting
A2	2020.04.09	Update product description	Huang Yunting
A3	2021.06.04	Change TUV certification icon	Liu Weili
A4	2021.12.10	Update product silk screen	Liu Weili