



#### Caratteristiche elettriche

Corrente d'impiego max ( $\leq 440V$ ) A 18

#### Caratteristiche dei contatti

Corrente di impiego Ie AC-3 ( $\leq 440V \leq 55^\circ C$ ) A 18

| Potenza nominale AC-3 ( $T \leq 55^\circ C$ ) | V  | kW  |
|-----------------------------------------------|----|-----|
| 230V                                          | kW | 4   |
| 400V                                          | kW | 7.5 |
| 415V                                          | kW | 9   |
| 440V                                          | kW | 9   |
| 500V                                          | kW | 10  |
| 690V                                          | kW | 10  |

Contatti ausiliari incorporati

|    |   |
|----|---|
| NA | 0 |
| NC | 1 |

#### Dati tecnici UL

Maximum UL/CSA horsepower ratings single-phase

|           |    |   |
|-----------|----|---|
| 110V-120V | HP | 1 |
| 220V-240V | HP | 3 |

Maximum UL/CSA horsepower ratings three-phase, 3-pole


|           |    |    |
|-----------|----|----|
| 200V-208V | HP | 5  |
| 220V-240V | HP | 5  |
| 440V-480V | HP | 10 |
| 550V-600V | HP | 15 |

#### Caratteristiche meccaniche


Attacchi tipo Vite di fissaggio

Peso prodotto g 760

#### Dimensioni

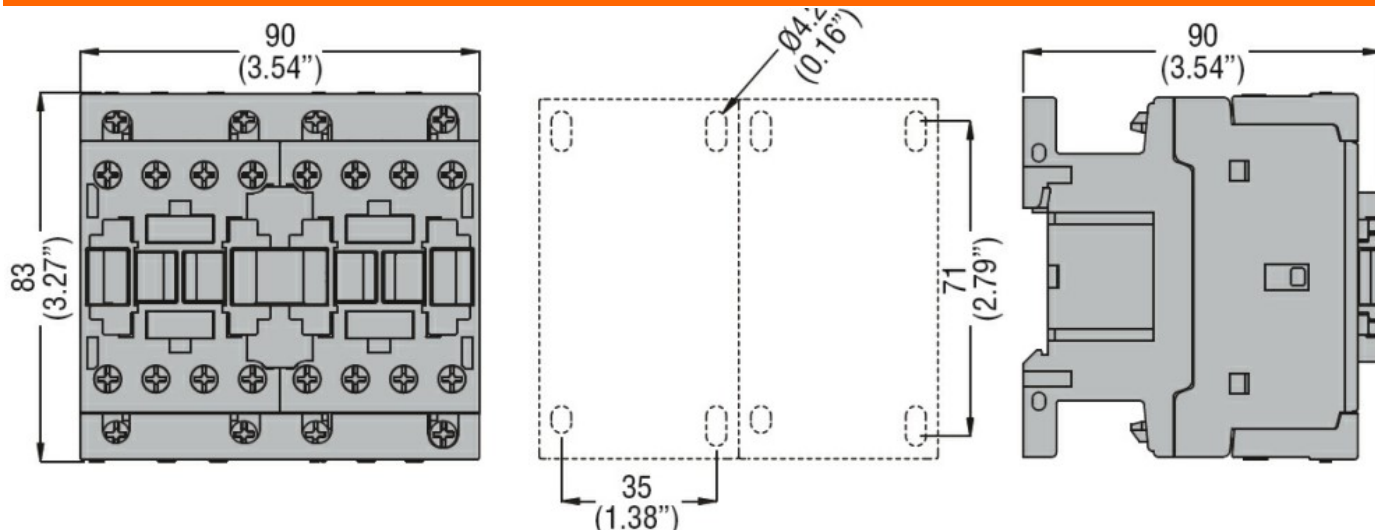

#### Schemi elettrici

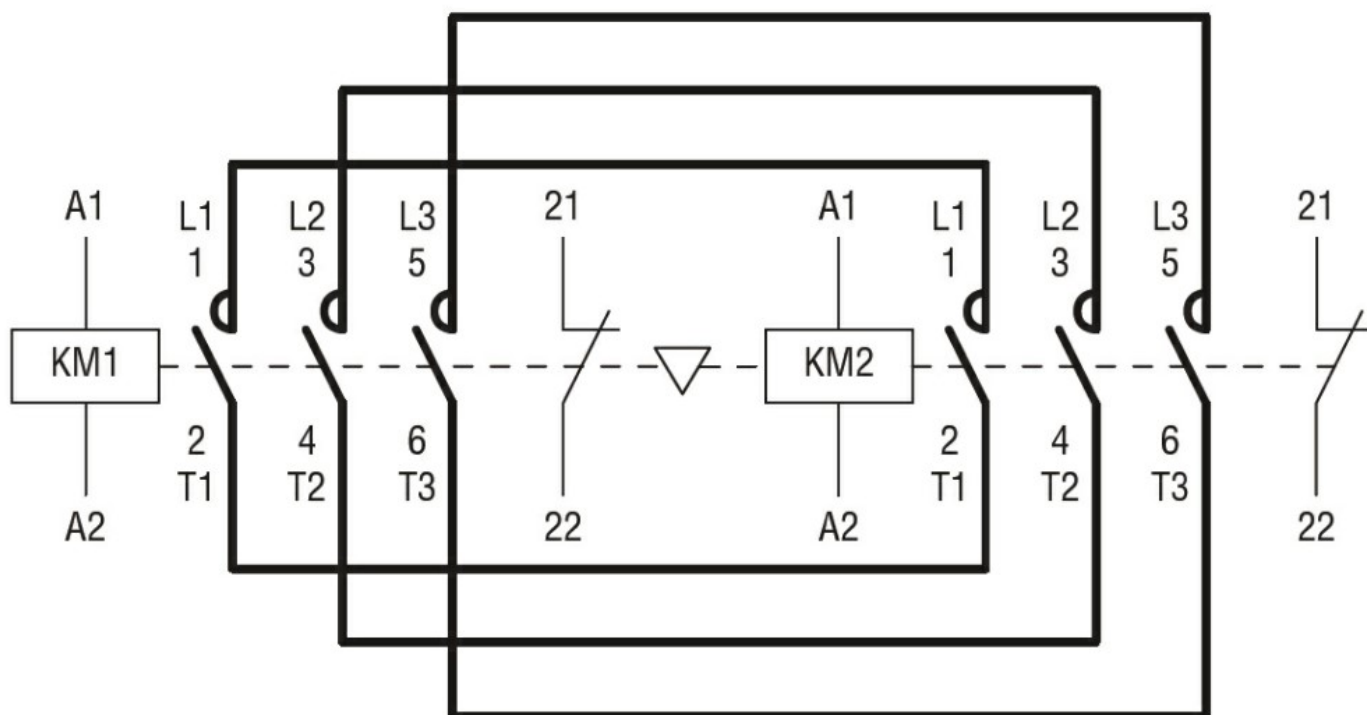

#### Omologazioni e conformità

##### Conformità

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508 CSA C22.2 n° 14

##### Omologazioni

cULus

#### Classificazione ETIM

ETIM 8.0

EC001037 -  
Combinazione  
starter motore