
M3P0387022060


ROZRUSZNIK GWIAZDA-TRÓJKĄT (30KW), ZŁOŻONY, W OBUDOWIE, CZAS ROZRUCHU DO 12 SEKUND I MAKSYMALNIE 30 ROZRUCHÓW NA GODZINĘ, MAKS. PRĄD ROBOCZY 60A. NAPIĘCIE CEWKI 220VAC 60HZ




Właściwości elektryczne			
Maksymalny prąd roboczy (≤440 V)		A	60
Komponenty			
W zestawie standardowa obudowa rozrusznika			M3PA70
W zestawie standardowy stycznik			BF3800A, BF3800A, BF2510A
Możliwość zakupu dodatkowego przekaźnika termicznego			RF38…
W zestawie standardowy zestyk pomocniczy			BFX1020, BFX1011, BFX1011
Właściwości styków			
Standardowe moce silnika wg IEC			
	230 V	kW	15
	400 V	kW	30
	440 V	kW	30
	500 V	kW	30
Właściwości mechaniczne			
Masa		g	3800
Warunki otoczenia			
Temperatura pracy			
	min.	°C	-25
	maks.	°C	+60
Temperatura składowania			
	min.	°C	-40
	maks.	°C	+70
Odporność i zabezpieczenie			
Stopień ochrony IP od frontu			IP65
Wymiary			


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

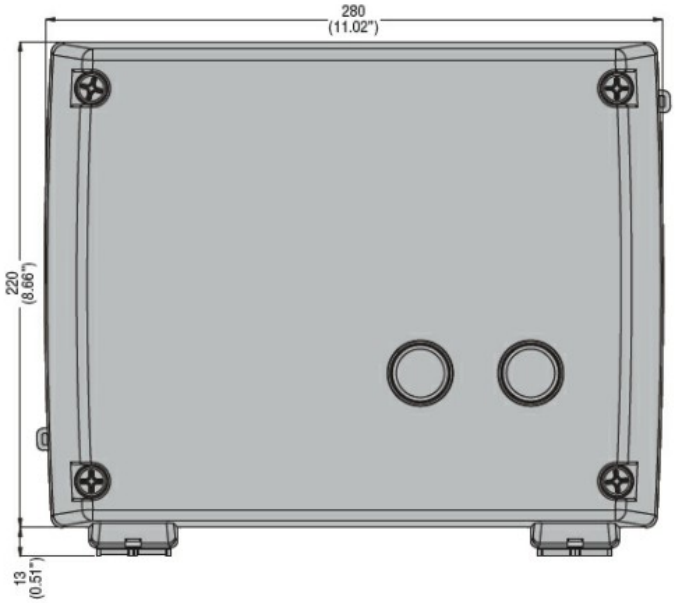

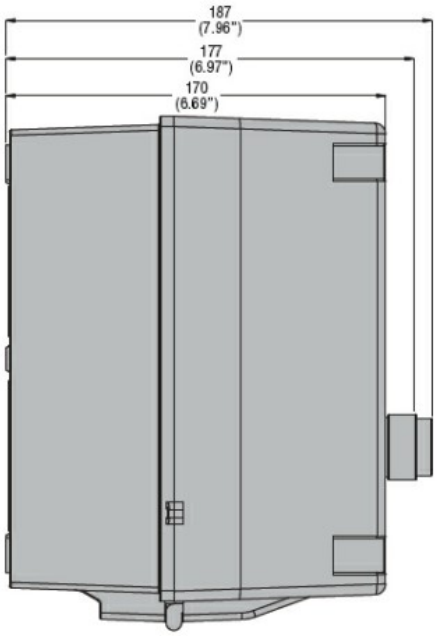

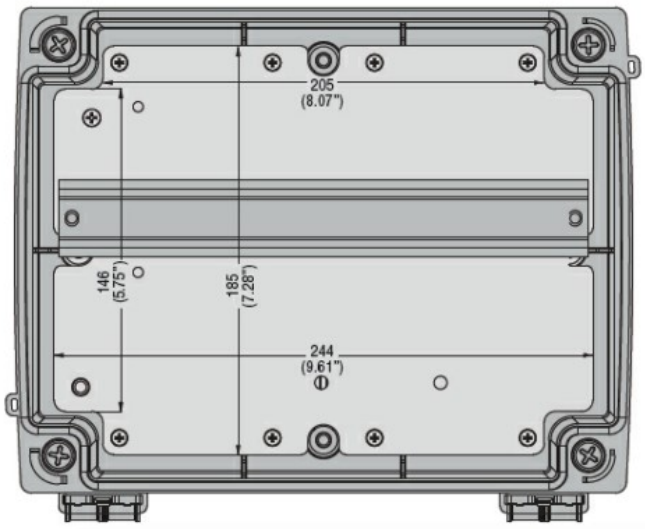



Drilling for surface fixing

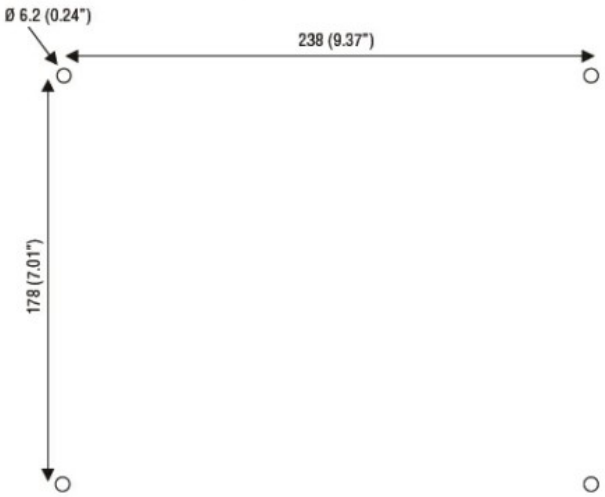

Schemat połączeń elektrycznych

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

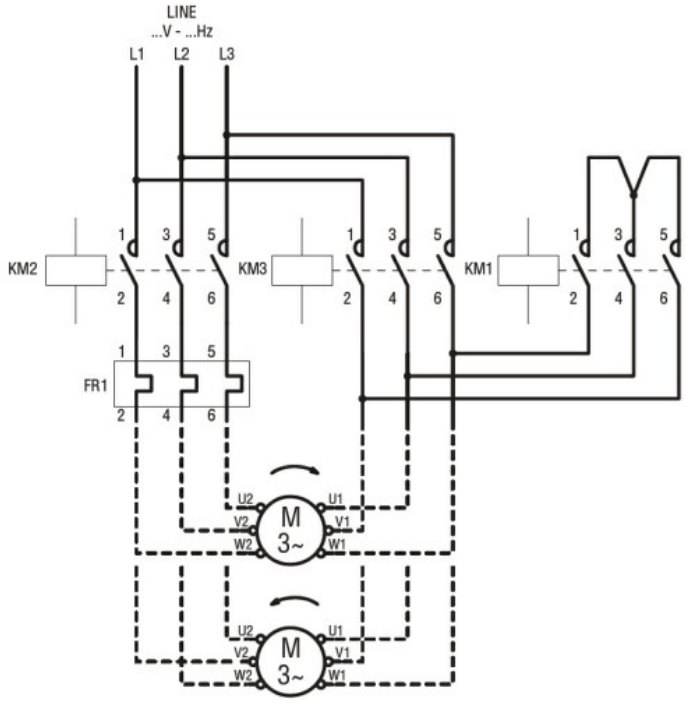

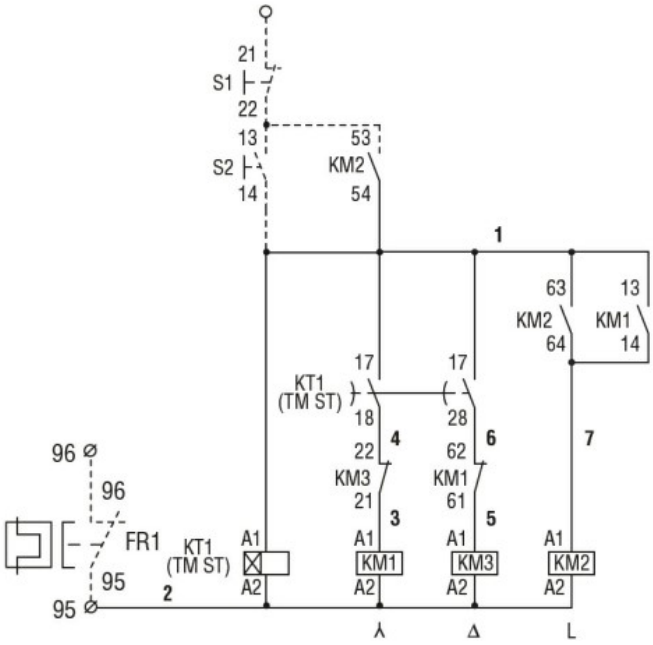

Klasyfikacja ETIM

ETIM 8,0

EC001037 - Układ rozruchowy silnika

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding