VLG30007A480

VARIABLE SPEED DRIVE, THREE-PHASE SUPPLY 380-480VAC 50/60HZ. EMC SUPPRESSOR BUILT-IN, CAT. C3, 0.75KW



General characteristics		
Rated power supply voltage		380…480VAC 50/60Hz
Rated output voltage	VAC	Three-phase 0… 480VAC 0-400Hz
Rated output current	A	2.5
Rated output power	kW	0.75
Rated output power	HP	1
EMC filter		Built-in EMC suppressor cat. C3
Communication port		RS485, Modbus-RTU
Technical features		
Input type		Three-phase
Rated mains voltage	VAC	380…480
Operating mains voltage range	VAC	323…528
Rated mains frequency	Hz	50/60
Operating mains frequency range	Hz	47.5…63
Output type		Three-phase
Output voltage range	VAC	0…480
Output frequency range	Hz	0…400
Current overload	%/s	150% for 60s (heavy load); 120% for 60s (standard load)
Brake chopper		Yes
Switching frequency		2…15kHz
Functions		
Motor control modes		V/f linear, V/f quadratic, V/f custom, sensorless vector control

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Speed reference signals		External potentiometer 0…5kΩ Voltage signals: 0…10VDC or -10…+10VDC Current signals: 0/4…20mA Buttons on front keyboard Front potentiometer Preset speeds Modbus
3-wire control		Yes
S-shape curves		Yes
Slip compensation		Yes
Flying restart		Yes
Access to DC bus		No
DC braking		Yes
DC injection at start		Yes
PID control		Yes
Sequencer (programmable frequency/time cycles)		No
Preset speeds		Yes
Autotuning		Yes
Safe torque Off (STO) safety function		No
PTC probe input		No
Protections		Overcurrent Output short circuit and earth/ground leakage Overvoltage Undervoltage Phase loss Motor heat overload (i2t) Overtemperature Speed reverse
Input and Output		
Number of digital input	Nr.	5
Digital input type		Selectable PNP or NPN logic
Number of digital output	Nr.	2
Digital output arrangement		1 relay output with changeover contact (C/O-SPDT) + 1 NO relay output
Output contacts ratings		1A 250VAC, 1A 30VDC
Number of analog input	Nr.	2


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

VLG30007A480

VARIABLE SPEED DRIVE, THREE-PHASE SUPPLY 380-480VAC 50/60HZ. EMC SUPPRESSOR BUILT-IN, CAT. C3, 0.75KW

Analog input type				1 voltage input type 0…10VDC or -10…+10VDC, 1 current input type 0/4…20mA
Number of analog output			Nr.	1
Analog output type				0…10VDC
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-10
		max	°C	+50
		Current derating		Over 45°C
	Storage temperature			
		min	°C	-20
		max	°C	+65
Relative humidity			%	<95% (with no condensing)
Max altitude			m	4000m (over 1000m derate the rated current by 1%/1000m)
Maximum Pollution degree				2
Housing				
Installation position				Vertical
IP degree of protection				IP20
Dimensions (W x H x D)			mm	86.2 x 164 x 139.7
Weight			Kg	1.08

Dimensions

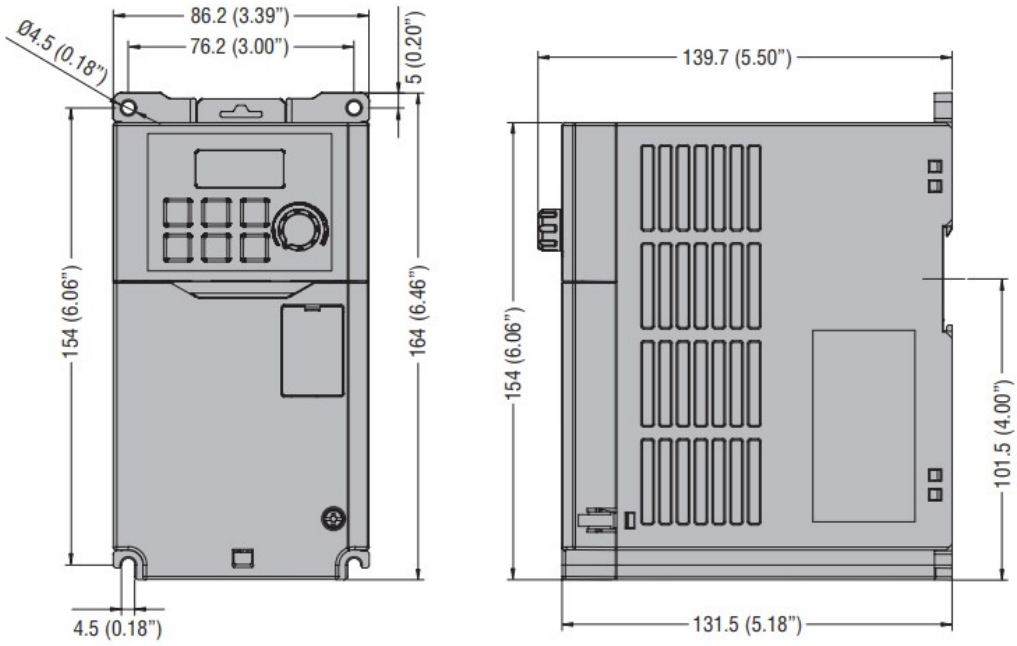


Wiring diagrams

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

VLG30007A480

VARIABLE SPEED DRIVE, THREE-PHASE SUPPLY 380-480VAC 50/60HZ. EMC SUPPRESSOR BUILT-IN, CAT. C3, 0.75KW

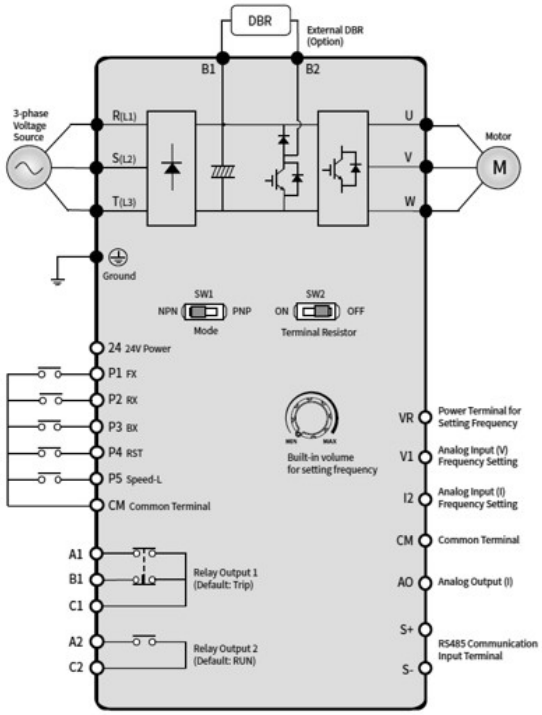

Certifications and compliance

Compliance

	CSA C22.2 N° 274
	EN/BS 61800-3
	EN/BS 61800-5-1
	UL 61800-5-1

Certificates

cULus

ETIM classification

ETIM 8.0	EC001857 - Frequency converter =< 1 kV

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding