

I/O Terminal Socket G70A

16-point I/O Terminal Socket accepts Various Devices such as G2R Relays, Solid State Relays, and Timers for More System Flexibility.

- Connects to a PLC with a simple snap-in connector.
- The G70A-ZOC16-3 can be combined with a DRT1-OD32ML I/O Terminal for DeviceNet connectivity.
- SPDT relays can be mounted.
- Conforms to VDE (VDE0160) and CE standards.
- Electric-shock preventive (finger-touch protection *) terminal socket.
- High-capacity (10 A) terminal socket.
- Built-in diodes for coil surge suppression.

* Round terminals cannot be used. Use Y terminals or ferrule terminals instead.



For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

Ordering Information

I/O Terminal Socket

Classification	Internal I/O common	Rated voltage	Model
Output	NPN (+ common)	24 VDC	G70A-ZOC16-3
	PNP (– common)	24 VDC	G70A-ZOC16-4

* Each relay to be mounted must incorporate a coil that has proper specifications within the maximum rated voltage range.

Suitable Relay/Solid State Relay/Solid-State Timer

Classification	I/O Terminal Socket	Relay	Solid State Relay (SSR)	Solid-State Timer
Output	NPN: G70A-ZOC16-3 PNP: G70A-ZOC16-4	G2R-1-S G2R-1-SN G2R-1-S (S) G2R-1-SN (S)	G3R-OA202SZN-UTU G3R-OA202SLN-UTU G3R-ODX02SN-UTU G3R-OD201SN-UTU G3RZ-201SLN	H3RN-1 H3RN-11

Accessories (Order Separately)

Short Bar

Applicable model	Model
G70A-ZOC16-3 G70A-ZOC16-4	G78-16-E

Connecting Sockets for I/O Terminal Expansion




Number of poles	Model
1 pole (G2R: 1 pole usage)	P2RFZ-05-E
2 poles (G2R: 2 poles usage)	P2RFZ-08-E

Cables for I/O Relay Terminals XW2Z-R

- Cable with Loose Wire and Crimp Terminals: XW2Z-RY□C
- Cable with Loose Wires: XW2Z-RA□C
- Cable with connectors
 - Fujitsu/Otax connectors (1:1): XW2Z-R□C
(1:2): XW2Z-RI□C-□
XW2Z-RO□C-□
(1:3): XW2Z-R□C-□-□
 - MIL connectors (1:1): XW2Z-RI□C
XW2Z-RO□C
(1:2): XW2Z-RI□-□-□-D□
XW2Z-RM□-□-□-D□
XW2Z-RO□-□-□-D1

Refer to "Connecting Cables" on page 12 for details.

Accessories for DIN Track Mounting

Appearance	Name		Model
	DIN Tracks	1 m	PFP-100N
		0.5 m	PFP-50N
	End Plate		PFP-M
	Spacer		PFP-S

Specifications

Ratings/Characteristics

Item	G70A-ZOC16-3	G70A-ZOC16-4
Contact resistance	10 mΩ (excluding the resistance of the relay to be used)	
Permissible current	10 A	
Max. operating voltage	380 VAC, 125 VDC	
Dielectric strength	4,000 VAC, 50/60 Hz for 1 min between connector and output terminals 2,000 VAC, 50/60 Hz for 1 min between output terminals 250 VAC, 50/60 Hz for 1 min between connectors	
Insulation resistance	Between connector and I/O terminals: 1,000 MΩ (at 500 V) Other: 100 MΩ (at 500 V)	
Vibration resistance	Malfunction: 10 to 61.2 to 10 Hz, 0.1-mm single amplitude (0.2-mm double amplitude); 61.2 to 150 to 61.2 Hz, 14.7 m/s ²	
Shock resistance	Malfunction: 200 m/s ²	
Noise immunity	Noise level: 2.0 kV; pulse width: 100 ns to 1 μs	
Ambient temperature	Operating: 0 to 55°C (with no condensation or icing)	
Ambient humidity	Operating: 35% to 85%	
Coil surge absorption element	Diode: 1 A, 400 V	
Protection diode for inverse connection	Diode (2 A, withstand inverse voltage: 40 V)	
Tensile strength	No damage when a tensile force of 49 N is applied for 1 second in any direction	
I/O terminal tightening torque	Tightening strength: 0.59 N·m; Tensile strength 49 N for 1 min.	
Weight	Approx. 400 g	

* Use a DC relay with a built-in diode because a DC relay without a built-in diode does not absorb any coil surge.

Approved Standards

The rated values for safety standard certification are not the same as individually defined performance values. Always check the specifications before use.

UL standard certification (File No. E95399)

Model	Ratings	Standard number	Category	Listed/Recognized	Contact ratings
G70A-ZOC16-3 G70A-ZOC16-4	---	UL508	NRAQ2	Recognized	10 A 250 VAC

CSA certified (File No. LR35535)

Model	Ratings	Standard number	Class number	Contact ratings
G70A-ZOC16-3 G70A-ZOC16-4	---	CSA C22.2 No.14	3211 04	10 A 250 VAC
				10 A 30 VDC

VDE Standards

Model	Standard number	Certification No.
G70A-ZOC16-3 G70A-ZOC16-4	VDE0160	124796

●Relay (G2R-1-S, G2R-1-SN, G2R-1-S (S), G2R-1-SN (S))

Coil Ratings

Rated voltage		24 VDC
Rated current		21.8 mA
Coil resistance		1,100 Ω
Coil inductance	Armature OFF	4.27
(H) (ref. value)	Armature ON	8.55
Must operate voltage		70% min. of rated voltage
Must release voltage		15% min. of rated voltage
Max. voltage		110% of rated voltage
Power consumption		Approx. 0.53 W

Contact Ratings

Number of poles		1 pole
Load		Resistive load ($\cos\phi = 1$) Inductive load ($\cos\phi = 0.4$; L/R = 7 ms)
Rated load		10 A at 250 VAC; 10 A at 30 VDC 7.5 A at 250 VAC; 5 A at 30 VDC
Rated carry current		10 A
Max. operating voltage		380 VAC, 125 VDC
Max. operating current		10 A
Max. switching capacity		2,500 VA, 300 W 1,875 VA, 150 W
Min. permissible load		100 mA at 5 VDC

●Relay (G2R-1A3-SN (SND), G2R-13-SN (SND))

Coil Ratings

Rated voltage		230 VAC	12 VDC	24 VDC
Rated current	50 Hz	3.7 mA	43.6 mA	21.8 mA
	60 Hz	3.1 mA		
Coil resistance		30,000 Ω	275 Ω	1,100 Ω
Must operate voltage		80% max. of rated voltage	70% max. of rated voltage	
Must release voltage		30% min. of rated voltage	15% min. of rated voltage	
Max. voltage		110% of rated voltage		
Power consumption		Approx. 0.7 W (60 Hz)	Approx. 0.53 W	

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of $+15\%/-20\%$ (AC rated current) or $\pm 10\%$ (DC coil resistance).

2. LEDs are used for the built-in operation indicator. For models equipped with these indications, the VAC rated current must be increased by approximately 1 mA; the VDC rated current, by approximately 4 mA.

3. Operating characteristics are measured at a coil temperature of 23°C.

● Solid State Relay (G3R-I/O)

Ratings

Input Module

Input

Model	Rated voltage	Operating voltage	Input current	Must operate voltage	Must release voltage
G3R-IAZR1SN	100 to 240 VAC	60 to 264 VAC	15 mA max.	60 VAC max.	20 VAC min.
G3R-IDZR1SN	5 VDC	4 to 6 VDC	8 mA max.	4 VDC max.	1 VDC min.
	12 to 24 VDC	6.6 to 32 VDC		6.6 VDC max.	3.6 VDC min.
G3R-IDZR1SN-1	5 VDC	4 to 6 VDC		4 VDC max.	1 VDC min.
	12 to 24 VDC	6.6 to 32 VDC		6.6 VDC max.	3.6 VDC min.

Output

Model	Load voltage	Load current
G3R-IAZR1SN	4 to 32 VDC	0.1 to 100 mA
G3R-IDZR1SN		
G3R-IDZR1SN-1		

Output Module

Input

Model	Rated voltage	Operating voltage	Input current	Must operate voltage	Must release voltage
G3R-OA202SZN-UTU	5 to 24 VDC	4 to 32 VDC	15 mA max. (at 25°C)	4 VDC max.	1 VDC min.
G3R-OA202SLN-UTU			8 mA max.		
G3R-ODX02SN-UTU					
G3R-OD201SN-UTU					

Output

Model	Load voltage	Load current *1, *2	Inrush current
G3R-OA202SZN-UTU	75 to 264 VAC	0.05 to 2 A	30 A (60 Hz, 1 cycle)
G3R-OA202SLN-UTU			
G3R-ODX02SN-UTU	4 to 60 VDC	0.01 to 2 A	8 A (10 ms)
G3R-OD201SN-UTU	40 to 200 VDC	0.01 to 1.5 A	8 A (10 ms)

*1. Depends on the ambient temperature. Refer to the Engineering Data (Reference Value) *Load Current vs. Ambient Temperature Rating* on page 7 for details.

*2. The minimum current value is measured at 10°C min.

Characteristics

Input Module

Item	G3R-IAZR1SN	G3R-IDZR1SN	G3R-IDZR1SN-1
Operate time	20 ms max.	0.1 ms max.	15 ms max.
Release time	20 ms max.	0.1 ms max.	15 ms max.
Response frequency	10 Hz	1 kHz	10 Hz
Output ON voltage drop	1.6 V max.		
Leakage current	5 μ A max.		
Insulation resistance	100 M Ω min. between input and output		
Dielectric strength	4,000 VAC, 50/60 Hz for 1 min between input and output		
Vibration resistance	10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)		
Shock resistance	1,000 m/s ²		
Ambient temperature	Operating: -30 to 80°C (with no icing) Storage: -30 to 100°C (with no icing)		
Ambient humidity	Operating: 45% to 85%		
Weight	Approx. 18 g		

Output Module

Item	G3R-OA202SZN-UTU	G3R-OA202SLN-UTU	G3R-ODX02SN-UTU	G3R-OD201SN-UTU
Operate time	1/2 of load power source cycle + 1 ms max.	1 ms max.		
Release time	1/2 of load power source cycle + 1 ms max.		2 ms max.	
Response frequency	20 Hz		100 Hz	
Output ON voltage drop	1.6 V max.			2.5 V max.
Leakage current	1.5 mA max.		1 mA max.	
Insulation resistance	100 MΩ min. between input and output			
Dielectric strength	4,000 VAC, 50/60 Hz for 1 min between input and output			
Vibration resistance	10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)			
Shock resistance	1,000 m/s ²			
Ambient temperature	Operating: -30 to 80°C (with no icing) Storage: -30 to 100°C (with no icing)			
Ambient humidity	Operating: 45% to 85%			
Weight	Approx. 18 g			

●Solid State Relay (G3RZ)

Ratings

Item Model	Input					Output			
	Rated voltage	Operating voltage	Impedance	Voltage level		Rated load voltage	Load voltage range	Load current *	Surge withstand current
				Must-operate voltage	Must-release voltage				
G3RZ-201SLN	5 VDC	4 to 6 VDC	400 Ω ±20%	4 VDC max.	1 VDC min.	5 to 240 VAC 5 to 100 VDC	3 to 264 VAC 3 to 125 VDC	100 μA to 1.0 A	10 A (10 ms)
	12 VDC	9.6 to 14.4 VDC	1.1 kΩ ±20%	9.6 VDC max.					
	24 VDC	19.2 to 28.8 VDC	2.2 kΩ ±20%	19.2 VDC max.					

* Depends on the ambient temperature. Refer to the reference data *Load Current vs. Ambient Temperature Rating* on page 7 for details.

Characteristics

Operation time	6 ms max.
Release time	10 ms max.
Output ON resistance	2.4 Ω max.
OFF leakage current	10 μA max. (at 125 VDC) 100 μA max. (at 200 VAC)
Insulation resistance	100 MΩ min. (at 500 VDC)
Dielectric strength	2,500 VAC at 50/60 Hz for 1 min. between inputs and outputs
Vibration resistance	10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)
Shock resistance	1,000 m/s ²
Storage temperature	-30 to 100°C (with no icing or condensation)
Ambient operating temperature	-30 to 85°C (with no icing or condensation)
Ambient operating humidity	45% to 85%
Weight	Approx. 20 g


●Solid-State Timer (H3RN)

For H3RN specifications, refer to the H3RN Datasheet.


Engineering Data (Reference Value)

When Mounted to a G2R

Endurance

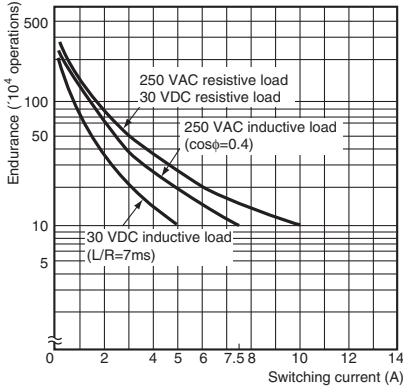

Maximum Switching Power G2R-1-S (24 VDC)

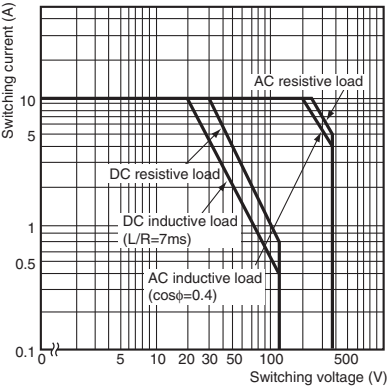


Note: The characteristics shown here are for 16-point mounting. This data was produced from actual values sampled on production lines, and should be used for reference purposes only. Since relays are mass-produced, a certain amount of tolerance is generally allowed in their application.


When Mounted to a G3R-I/O

Load Current vs. Ambient Temperature Rating


G3R-OA202SZN-UTU
G3R-OA202SLN-UTU

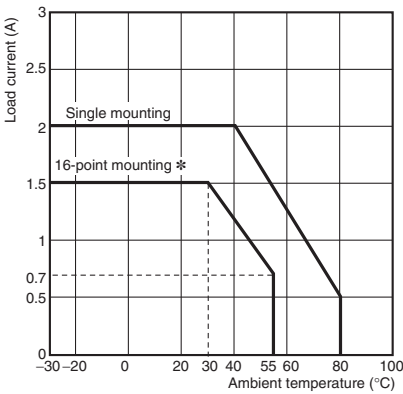

G3R-ODX02SN-UTU

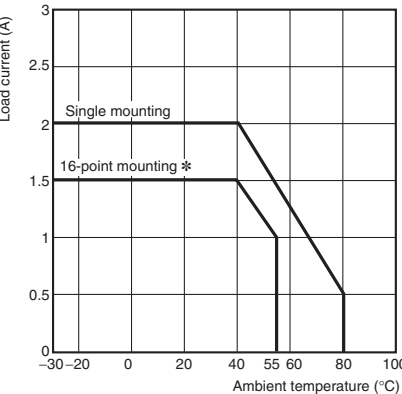

G3R-OD201SN-UTU

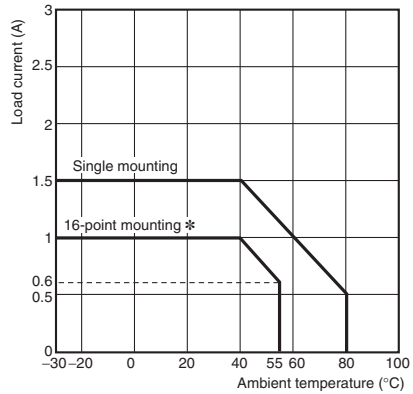


* On G70A-ZOC16, fully mounted.


Inrush Current Resistivity

Non-repetitive (Keep the inrush current to half the rated value if it occurs repetitively.)


G3R-OA202SZN-UTU
G3R-OA202SLN-UTU

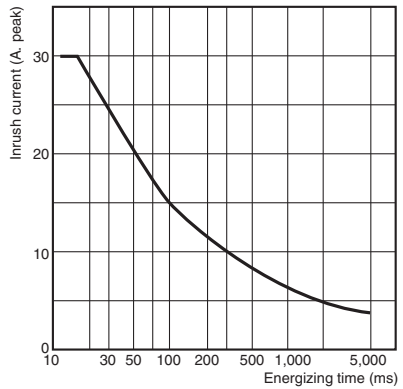

G3R-ODX02SN-UTU

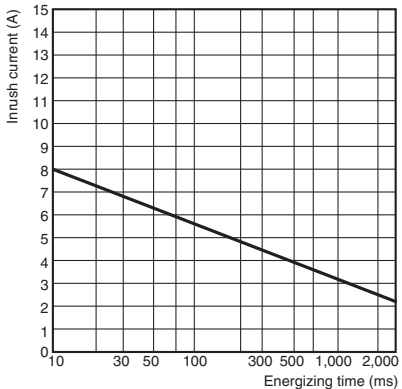


G3R-OD201SN-UTU

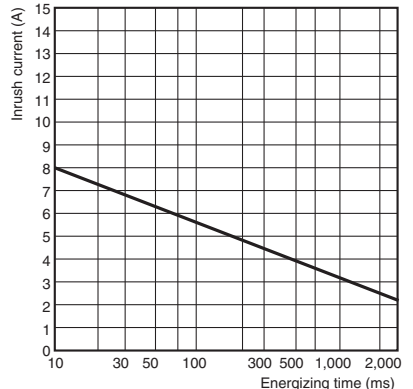

When Mounted to a G3RZ

Load Current vs. Ambient Temperature Rating


G3RZ-201SLN

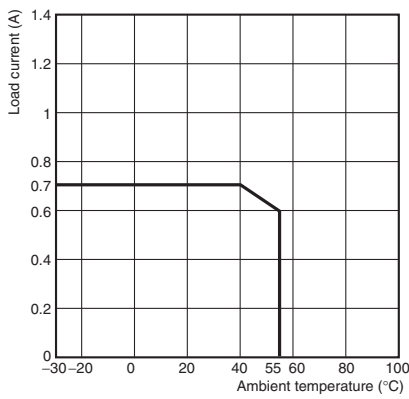

Inrush Current Resistivity

Non-repetitive (Keep the inrush current to half the rated value if it occurs repetitively.)


G3RZ-201SLN

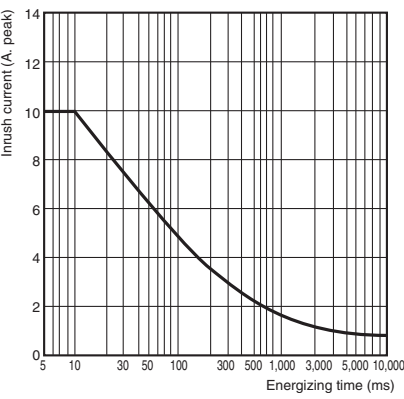

Internal Circuits


• G70A-ZOC16-3 (NPN)

NPN (positive common): The output at the connected controller will have a negative common from an NPN transistor.

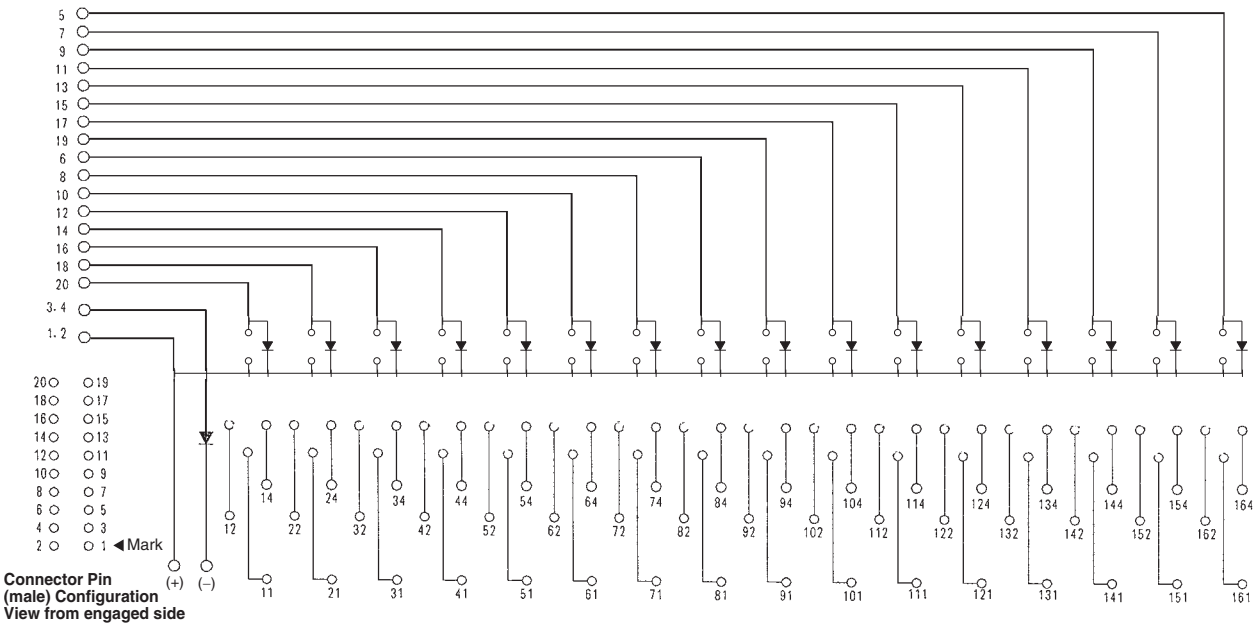

G70A-ZOC16-4 (PNP)

PNP (negative common): The output at the connected controller will have a positive common from a PNP transistor.

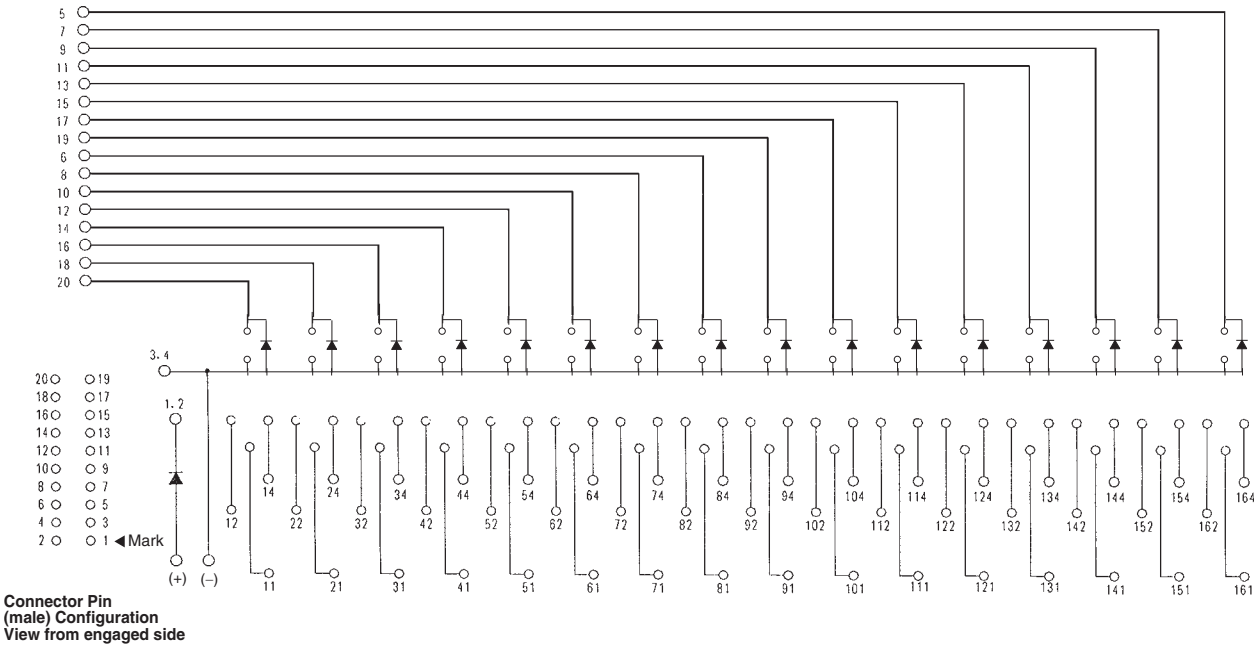


Note: Pin numbers are indicated for convenience. The ▲ mark can be used to determine orientation.

G70A

Dimensions


(Unit: mm)

G70A-ZOC16 (Output)

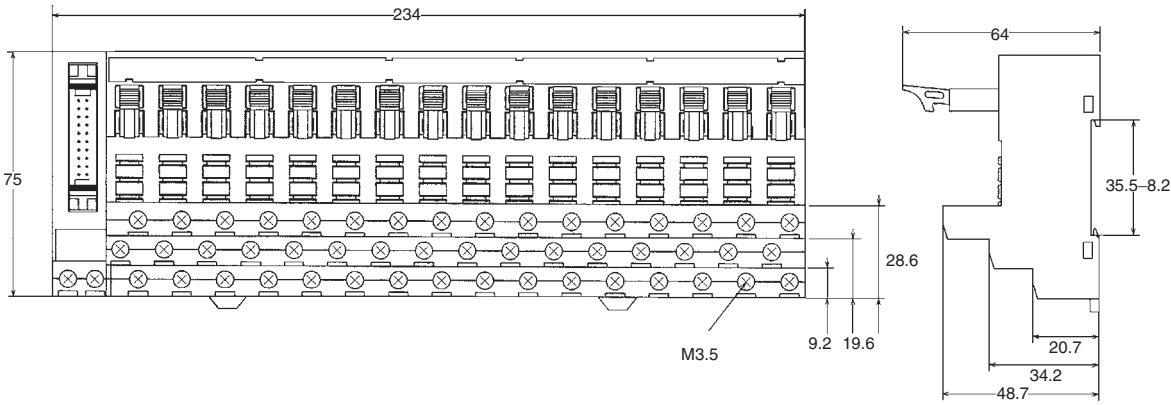



Short Bar

G78-16-E

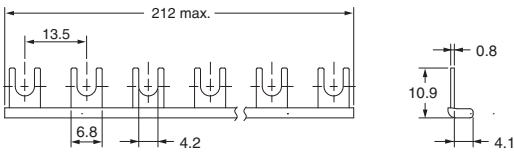


Parts for Rail Mounting



DIN Track
PFP-100N
PFP-50N

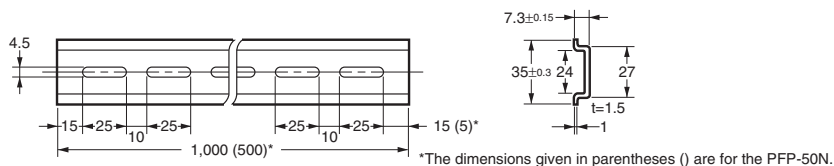


End Plate
PFP-M

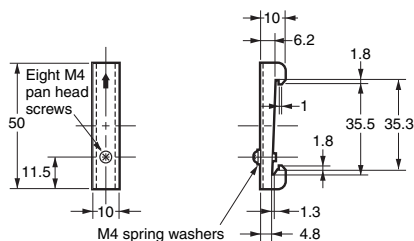

Spacer
PFP-S



Terminal Arrangement/Internal Connection

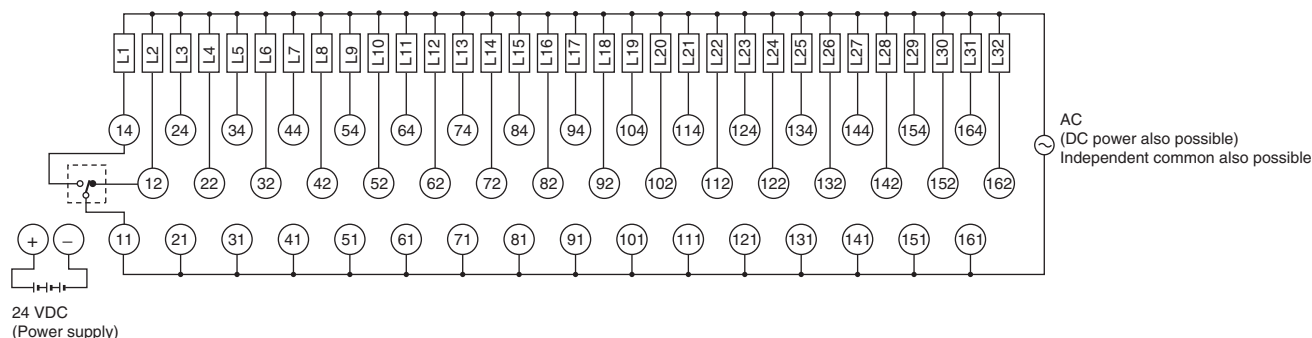

Note: The above diagram shows the Unit mounted to a G2R-1-S.

When mounting to a G3R-OA□-UTU or G3RZ-201SLN, pins 11 to 14 are output terminals.







When mounting to a G3R-OD□-UTU, pin 14 is a plus terminal and pin 11 is a minus terminal. When mounting to G3RZ-201SLN, there is no polarity.





Safety Precautions

Be sure to read *the Safety Precautions for All I/O Relay Terminals* in the website: <http://www.ia.omron.com/>.

Connecting Cables

Refer to the datasheet for the **XW2Z-R** Cables for I/O Relay Terminals (Cat. No. G126).




Type	Name	I/O Classification	Appearance	Cable length L (mm)		Models	
Various devices	Cables with Loose Wires and Crimp Terminals XW2Z-RY□C	16 I/O points		1,000		XW2Z-RY100C	
				1,500		XW2Z-RY150C	
				2,000		XW2Z-RY200C	
				3,000		XW2Z-RY300C	
				5,000		XW2Z-RY500C	
	Cables with Loose Wires XW2Z-RA□C	16 I/O points		2,000		XW2Z-RA200C	
				5,000		XW2Z-RA500C	
Fujitsu/Otax connectors (24 pins)	Cables with Connectors (1:1) XW2Z-R□C	16 I/O points		1,000		XW2Z-R100C	
				1,500		XW2Z-R150C	
				2,000		XW2Z-R200C	
				3,000		XW2Z-R300C	
				5,000		XW2Z-R500C	
Fujitsu/Otax connectors (40 pins)	Cables with Connectors (1:2) XW2Z-RI□C-□ XW2Z-RO□C-□	32 input points		(A) 1,000	(B) 750	XW2Z-RI100C-75	
				(A) 1,500	(B) 1,250	XW2Z-RI150C-125	
				(A) 2,000	(B) 1,750	XW2Z-RI200C-175	
				(A) 3,000	(B) 2,750	XW2Z-RI300C-275	
				(A) 5,000	(B) 4,750	XW2Z-RI500C-475	
		32 output points		(A) 1,000	(B) 750	XW2Z-RO100C-75	
				(A) 1,500	(B) 1,250	XW2Z-RO150C-125	
				(A) 2,000	(B) 1,750	XW2Z-RO200C-175	
				(A) 3,000	(B) 2,750	XW2Z-RO300C-275	
				(A) 5,000	(B) 4,750	XW2Z-RO500C-475	
Fujitsu/Otax connectors (56 pins)	Cables with Connectors (1:3) XW2Z-R□C-□-□	48 I/O points		(A) 1,500	(B) 1,250	(C) 1,000	XW2Z-R150C-125-100
				(A) 2,000	(B) 1,750	(C) 1,500	XW2Z-R200C-175-150
				(A) 3,000	(B) 2,750	(C) 2,500	XW2Z-R300C-275-250
MIL connectors (20 pins)	Cables with Connectors (1:1) XW2Z-RI□C XW2Z-RO□C	16 I/O points		250		XW2Z-RI25C	
				500		XW2Z-RI50C	
				250		XW2Z-RO25C	
				500		XW2Z-RO50C	

Type	Name	I/O Classification	Appearance	Cable length L (mm)		Models
MIL connectors (40 pins)	Cables with Connectors (1:2) XW2Z-RO□-□-D1, XW2Z-RI□-□-D1, XW2Z-RI□-□-D2, XW2Z-RM□-□-D1 *1, XW2Z-RM□-□-D2 *1	32 I/O points		(A) 500	(B) 250	XW2Z-RO50-25-D1
				(A) 750	(B) 500	XW2Z-RO75-50-D1
				(A) 1,000	(B) 750	XW2Z-RO100-75-D1
				(A) 1,500	(B) 1,250	XW2Z-RO150-125-D1
				(A) 2,000	(B) 1,750	XW2Z-RO200-175-D1
				(A) 3,000	(B) 2,750	XW2Z-RO300-275-D1
				(A) 5,000	(B) 4,750	XW2Z-RO500-475-D1
				(A) 500	(B) 250	XW2Z-RI50-25-D1
				(A) 750	(B) 500	XW2Z-RI75-50-D1
				(A) 1,000	(B) 750	XW2Z-RI100-75-D1
				(A) 1,500	(B) 1,250	XW2Z-RI150-125-D1
				(A) 2,000	(B) 1,750	XW2Z-RI200-175-D1
		(A) 3,000		(B) 2,750	XW2Z-RI300-275-D1	
		(A) 5,000		(B) 4,750	XW2Z-RI500-475-D1	
		16 inputs and 16 outputs (32 I/O points)		(A) 500	(B) 250	XW2Z-RI50-25-D2
				(A) 750	(B) 500	XW2Z-RI75-50-D2
(A) 500	(B) 250		XW2Z-RM50-25-D1			
(A) 750	(B) 500		XW2Z-RM75-50-D1			
Mitsubishi Electric PLCs with 32-point connectors (1:2) *2	Mitsubishi Electric PLC Connecting Cables XW2Z-RI□C-□-MN XW2Z-RO□C-□-MN	32 input points		(A) 1,000	(B) 750	XW2Z-RI100C-75-MN
		32 output points		(A) 1,500	(B) 1,250	XW2Z-RI150C-125-MN
				(A) 2,000	(B) 1,750	XW2Z-RI200C-175-MN
				(A) 3,000	(B) 2,750	XW2Z-RI300C-275-MN
				(A) 1,000	(B) 750	XW2Z-RO100C-75-MN
				(A) 1,500	(B) 1,250	XW2Z-RO150C-125-MN
				(A) 2,000	(B) 1,750	XW2Z-RO200C-175-MN
				(A) 3,000	(B) 2,750	XW2Z-RO300C-275-MN
Schneider Electric PLCs with 32-point connectors (1:2) Applicable models: For inputs: 140 DDI 353 00 For outputs: 140 DDO 353 00	Schneider Electric PLC Connecting Cables	32 input points		500		XW2Z-R050C-SCH-A
				1,000		XW2Z-R100C-SCH-A
				2,000		XW2Z-R200C-SCH-A
				3,000		XW2Z-R300C-SCH-A
				5,000		XW2Z-R500C-SCH-A
		32 output points		500		XW2Z-R050C-SCH-B
				1,000		XW2Z-R100C-SCH-B
				2,000		XW2Z-R200C-SCH-B
				3,000		XW2Z-R300C-SCH-B
				5,000		XW2Z-R500C-SCH-B
Schneider Electric PLCs with 16-point connectors (1:1) Applicable models: For inputs: BMX DDI 1602 For outputs: BMX DDO 1602	XW2Z-R□C-SCH-□	16 input points		500		XW2Z-R050C-SCH-C
				1,000		XW2Z-R100C-SCH-C
				2,000		XW2Z-R200C-SCH-C
				3,000		XW2Z-R300C-SCH-C
				5,000		XW2Z-R500C-SCH-C
		16 output points		500		XW2Z-R050C-SCH-D
				1,000		XW2Z-R100C-SCH-D
				2,000		XW2Z-R200C-SCH-D
				3,000		XW2Z-R300C-SCH-D
				5,000		XW2Z-R500C-SCH-D

Note: Contact for a cable length other than the above.

*1. These cables are used to connect to slave products for DeviceNet and other networks.

*2. For details on models that can be used, refer to *List of Combinations with the Mitsubishi PLC MELSEC-L Series, MELSEC-Q Series, and MELSEC iQ-R Series* on page 19.

Type	Name	I/O Classification	Appearance	Cable length L (mm)	Models			
Siemens PLCs with 32-point connectors (1:2) Applicable models: For inputs: 6ES7 321-1BL00-0AA0 For outputs: 6ES7 322-1BL00-0AA0		32 input points		500	XW2Z-R050C-SIM-A			
				1,000	XW2Z-R100C-SIM-A			
				2,000	XW2Z-R200C-SIM-A			
				3,000	XW2Z-R300C-SIM-A			
				5,000	XW2Z-R500C-SIM-A			
		32 output points		500	XW2Z-R050C-SIM-B			
				1,000	XW2Z-R100C-SIM-B			
				2,000	XW2Z-R200C-SIM-B			
				3,000	XW2Z-R300C-SIM-B			
				5,000	XW2Z-R500C-SIM-B			
Siemens PLCs with 16-point connectors (1:1) Applicable models: For inputs: 6ES7 321-1BH02-0AA0	Siemens PLC Connecting Cables XW2Z-R□C-SIM-□	16 input points		500	XW2Z-R050C-SIM-C			
				1,000	XW2Z-R100C-SIM-C			
				2,000	XW2Z-R200C-SIM-C			
				3,000	XW2Z-R300C-SIM-C			
				5,000	XW2Z-R500C-SIM-C			
		Siemens PLCs with 32-point connectors (1:2) Applicable models: For inputs: 6ES7 421-1BL-0AA0 For outputs: 6ES7 422-1BL-0AA0			32 input points		500	XW2Z-R050C-SIM-D
							1,000	XW2Z-R100C-SIM-D
							2,000	XW2Z-R200C-SIM-D
							3,000	XW2Z-R300C-SIM-D
							5,000	XW2Z-R500C-SIM-D
32 output points	500		XW2Z-R050C-SIM-E					
	1,000		XW2Z-R100C-SIM-E					
	2,000		XW2Z-R200C-SIM-E					
	3,000		XW2Z-R300C-SIM-E					
	5,000		XW2Z-R500C-SIM-E					






Note: 1. Refer to Combinations of Connections starting on the next page.

2. For connector pin diagrams and cable colors, refer to the wiring diagrams starting on page 4 of *XW2Z-R Cables for I/O Relay Terminals* (Cat. No. G126).

Combinations of Connections

Refer to the next page for details on the combinations of cables and connection devices [OMRON PLC I/O Units NX Series, CJ Series, CS Series], [Mitsubishi PLC I/O Units MELSEC-L Series, MELSEC-Q Series, MELSEC iQ-R Series].
For combinations with other products, refer to *I/O Relay Terminals and Connected Devices* (Cat. No. J217) or to the datasheets for related products.

Connection Patterns

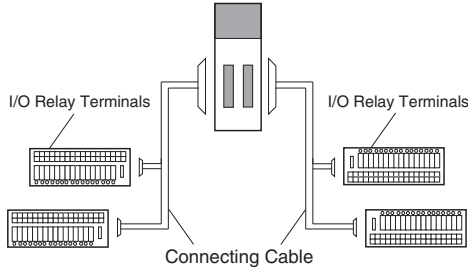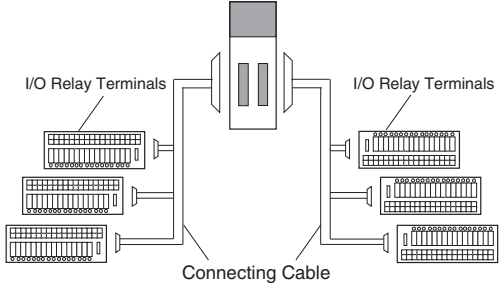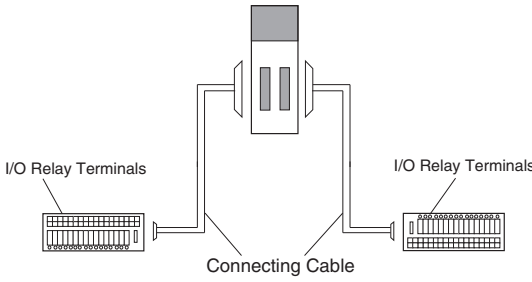Pattern	Configuration
A	 <p>Diagram A shows a vertical PLC unit connected to two I/O Relay Terminal blocks. A single connecting cable runs from the PLC unit to the top terminal block, and then continues down to the bottom terminal block. Labels include 'Connecting Cable' and 'I/O Relay Terminals'.</p>
B	 <p>Diagram B shows a vertical PLC unit connected to two pairs of I/O Relay Terminal blocks. A single connecting cable runs from the PLC unit to the top pair of terminal blocks, and then continues down to the bottom pair. Labels include 'I/O Relay Terminals' and 'Connecting Cable'.</p>
D	 <p>Diagram D shows a vertical PLC unit connected to three pairs of I/O Relay Terminal blocks. A single connecting cable runs from the PLC unit to the top pair of terminal blocks, and then continues down to the middle and bottom pairs. Labels include 'I/O Relay Terminals' and 'Connecting Cable'.</p>
E	 <p>Diagram E shows a vertical PLC unit connected to two pairs of I/O Relay Terminal blocks. A single connecting cable runs from the PLC unit to the top pair of terminal blocks, and then continues down to the bottom pair. Labels include 'I/O Relay Terminals' and 'Connecting Cable'.</p>
F	 <p>Diagram F shows a vertical PLC unit connected to one I/O Relay Terminal block. A single connecting cable runs from the PLC unit to the terminal block. Labels include 'Connecting Cable' and 'I/O Relay Terminals'.</p>

List of Combinations with the OMRON PLC NX Series

NX I/O Units				Conne ction pattern	XW2Z-R Cables			G70A-ZOC16 Relay Terminal Socket			
I/O capacity	Model	External connectors *2	Polarity		Specifications	Model *2	Quantity required	Specifications	Model	Quantity required	
Input Units											
16 inputs	NX-ID5142-5	1 MIL connector	NPN or PNP	F	1:1	XW2Z-RO□C	1	Inputs *3	---		
32 inputs	NX-ID6142-5	1 MIL connector	NPN or PNP	A	1:2	XW2Z-RO□-□-D1	1		---		
	NX-ID6142-6	1 Fujitsu/Otax connector	NPN or PNP			XW2Z-RI□C-□	1		---		
Output Units											
16 outputs	NX-OD5121-5	1 MIL connector	NPN	F	1:1	XW2Z-RO□C	1	NPN outputs	G70A-ZOC16-3	1	
	NX-OD5256-5	1 MIL connector	PNP			XW2Z-RO□C	1	PNP outputs	G70A-ZOC16-4	1	
32 outputs	NX-OD6121-5	1 MIL connector	NPN	A	1:2	XW2Z-RO□-□-D1	1	NPN outputs	G70A-ZOC16-3	2	
	NX-OD6256-5	1 MIL connector	PNP			XW2Z-RO□-□-D1	1	PNP outputs	G70A-ZOC16-4	2	
32 outputs	NX-OD6121-6	1 Fujitsu/Otax connector	NPN			XW2Z-RO□C-□	1	NPN outputs	G70A-ZOC16-3	2	
Mixed I/O Units											
16 inputs and 16 outputs	NX-MD6121-6	2 Fujitsu/Otax connectors (1 for 16 inputs and 1 for 16 outputs)	Outputs: NPN Inputs: NPN or PNP	E	1:1	XW2Z-R□C	2	Inputs *3	---		
								NPN outputs	G70A-ZOC16-3	1	
	NX-MD6121-5	2 MIL connectors (1 for 16 inputs and 1 for 16 outputs)	Outputs: NPN Inputs: NPN or PNP			XW2Z-RO□C	1	Inputs *3	---		
						XW2Z-RO□C	1	NPN outputs	G70A-ZOC16-3	1	
	NX-MD6256-5	2 MIL connectors (1 for 16 inputs and 1 for 16 outputs)	Outputs: PNP Inputs: NPN or PNP			XW2Z-RO□C	1	Inputs *3	---		
XW2Z-RI□C				1	PNP outputs	G70A-ZOC16-4	1				

*1. For details on the types of connectors, refer to pages 12 and 13.

*2. The box □ is replaced by the cable length.

*3. Either NPN inputs or PNP inputs can be used.

List of Combinations with the OMRON PLC CJ Series

CJ1W I/O Units				Conne ction pattern	XW2Z-R Cables			G70A-ZOC16 Relay Terminal Socket		
I/O capacity	Model	External connectors *1	Polarity		Specifications	Model *2	Quantity required	Specifications	Model	Quantity required
DC Input Units										
32 inputs	CJ1W-ID231	1 Fujitsu/Otax connector	NPN	A	1:2	XW2Z-RI□C-□	1	Inputs *3	---	
	CJ1W-ID232	1 MIL connector	NPN			XW2Z-RO□-□-D1	1		---	
	CJ1W-ID233	1 MIL connector	NPN			XW2Z-RO□-□-D1	1		---	
64 inputs	CJ1W-ID261	2 Fujitsu/Otax connectors (2, 32-point connectors)	NPN	B		XW2Z-RI□C-□	2		---	
	CJ1W-ID262	2 MIL connectors (2, 32-point connectors)	NPN			XW2Z-RO□-□-D1	2		---	
Transistor Output Units										
32 outputs	CJ1W-OD231	1 Fujitsu/Otax connector	Sinking (NPN)	A	1:2	XW2Z-RO□C-□	1	NPN outputs	G70A-ZOC16-3	2
	CJ1W-OD233	1 MIL connector	Sinking (NPN)			XW2Z-RO□-□-D1	1		G70A-ZOC16-3	
	CJ1W-OD232	1 MIL connector	Sourcing (PNP)			XW2Z-RO□-□-D1	1	PNP outputs	G70A-ZOC16-4	2
	CJ1W-OD234	1 MIL connector	Sinking (NPN)			XW2Z-RO□-□-D1	1	NPN outputs	G70A-ZOC16-3	2
64 outputs	CJ1W-OD261	2 Fujitsu/Otax connectors (2, 32-point connectors)	Sinking (NPN)	B		XW2Z-RO□C-□	2	NPN outputs	G70A-ZOC16-3	2
	CJ1W-OD262	2 MIL connectors (2, 32-point connectors)	Sourcing (PNP)			XW2Z-RO□-□-D1	2	PNP outputs	G70A-ZOC16-4	2
	CJ1W-OD263	2 MIL connectors (2, 32-point connectors)	Sinking (NPN)			XW2Z-RO□-□-D1	2	NPN outputs	G70A-ZOC16-3	2
DC Input/Transistor Output Units										
16 inputs and 16 outputs	CJ1W-MD231	2 Fujitsu/Otax connectors (1 for 16 inputs and 1 for 16 outputs)	Sinking (NPN)	E	1:1	XW2Z-R□C	2	Inputs *3	---	
								NPN outputs	G70A-ZOC16-3	1
	CJ1W-MD233	2 MIL connectors (1 for 16 inputs and 1 for 16 outputs)	Sinking (NPN)			XW2Z-RO□C	1	Inputs *3	---	
						XW2Z-RO□C	1	NPN outputs	G70A-ZOC16-3	1
	CJ1W-MD232	2 MIL connectors (1 for 16 inputs and 1 for 16 outputs)	Sourcing (PNP)			XW2Z-RO□C	1	Inputs *3	---	
32 inputs and 32 outputs	CJ1W-MD261	2 Fujitsu/Otax connectors (1 for 32 inputs and 1 for 32 outputs)	Sinking (NPN)	B	1:2	XW2Z-RI□C-□	1	Inputs *3	---	
						XW2Z-RO□C-□	1	NPN outputs	G70A-ZOC16-3	1
	CJ1W-MD263	2 MIL connectors (1 for 32 inputs and 1 for 32 outputs)	Sinking (NPN)			XW2Z-RO□-□-D1	1	Inputs *3	---	
						XW2Z-RO□-□-D1	1	NPN outputs	G70A-ZOC16-4	2

*1. For details on the types of connectors, refer to pages 12 and 13.

*2. The box □ is replaced by the cable length.

*3. Either NPN inputs or PNP inputs can be used.

List of Combinations with the OMRON PLC CS Series

CJ1W I/O Units				Conne ction pattern	XW2Z-R Cables			G70A-ZOC16 Relay Terminal Socket		
I/O capacity	Model	External connectors	Polarity		Specifications	Model *1	Quantity required	Specifications	Model	Quantity required
DC Input Units										
32 inputs	CS1W-ID231	1 Fujitsu/Otax connector	NPN	A	1:2	XW2Z-RI□C-□	1	Inputs #2	---	
64 inputs	CS1W-ID261	2 Fujitsu/Otax connectors (2, 32-point connectors)	NPN	B		XW2Z-RI□C-□	2		---	
96 inputs	CS1W-ID291	2 Fujitsu/Otax connectors (2, 48-point connectors)	NPN	D	1:3	XW2Z-R□C-□-□	2		---	
Transistor Output Units										
32 outputs	CS1W-OD231	1 Fujitsu/Otax connector	Sinking (NPN)	A	1:2	XW2Z-RO□C-□	1	NPN outputs	G70A-ZOC16-3	2
	CS1W-OD232	1 Fujitsu/Otax connector	Sourcing (PNP)			XW2Z-RO□C-□	1	PNP outputs	G70A-ZOC16-4	2
64 outputs	CS1W-OD261	2 Fujitsu/Otax connectors (2, 32-point connectors)	Sinking (NPN)	B		XW2Z-RO□C-□	2	NPN outputs	G70A-ZOC16-3	4
	CS1W-OD262	2 Fujitsu/Otax connectors (2, 32-point connectors)	Sourcing (PNP)			XW2Z-RO□C-□	2	PNP outputs	G70A-ZOC16-4	4
96 outputs	CS1W-OD291	2 Fujitsu/Otax connectors (2, 48-point connectors)	Sinking (NPN)	D	1:3	XW2Z-R□C-□-□	2	NPN outputs	G70A-ZOC16-3	6
DC Input/Transistor Output Units										
32 inputs and 32 outputs	CS1W- MD261	2 Fujitsu/Otax connectors (1 for 32 inputs and 1 for 32 outputs)	Sinking (NPN)	B	1:2	XW2Z-RI□C-□	1	Inputs #2	---	
						XW2Z-RO□C-□	1	NPN outputs	G70A-ZOC16-3	1
	CS1W- MD262	2 Fujitsu/Otax connectors (1 for 32 inputs and 1 for 32 outputs)	Sourcing (PNP)			XW2Z-RI□C-□	1	Inputs #2	---	
						XW2Z-RO□C-□	1	PNP outputs	G70A-ZOC16-4	2
48 inputs and 48 outputs	CS1W- MD291	2 Fujitsu/Otax connectors (1 for 48 inputs and 1 for 48 outputs)	Sinking (NPN)	D	1:3	XW2Z-R□C-□-□	2	Inputs #2	---	
			NPN outputs			G70A-ZOC16-3	3			
	CS1W- MD292	2 Fujitsu/Otax connectors (1 for 48 inputs and 1 for 48 outputs)	Sourcing (PNP)				1	Inputs #2	---	

*1. The box □ is replaced by the cable length.

*2. Either NPN inputs or PNP inputs can be used.

Refer to the manuals for the connected PLC for the connections to I/O Units for OMRON PLCs.

Series	Model	Man. No.	Manual Name
CS1	CS1G-CPU□□H, CS1H-CPU□□H	W339	Programmable Controllers Operation Manual
CJ1	CJ1H-CPU□□H-R, CJ1G/H-CPU□□H, CJ1G-CPU□□P, CJ1M-CPU□□, CJ1G-CPU□□	W393	CJ Series Programmable Controllers Operation Manual
CJ2	CJ2H-CPU6□-EIP, CJ2H-CPU6□, CJ2M-CPU□□	W472	CJ-series CJ2 CPU Unit Hardware User's Manual
NJ	NJ501-□□□□	W500	NJ-series CPU Unit Hardware User's Manual
NX	NX-ID□□□□, NX-IA□□□□, NX-OD□□□□, NX-OC□□□□, NX-MD□□□□	W521	NX-series Digital I/O Units User's Manual

List of Combinations with the Mitsubishi PLC MELSEC-L Series, MELSEC-Q Series, and MELSEC iQ-R Series

PLC I/O Unit				Conne ction pattern	XW2Z-R Cables			G70A-ZOC16 Relay Terminal Socket		
I/O capacity	Model	External connectors	Polarity		Specifications	Model ※	Quantity required	Specifications	Model	Quantity required
Input Units										
32 inputs	LX41C4	1 Fujitsu/Otax connector	NPN or PNP	A	1:2	XW2Z-RI□□□-□□MN	1	---		
	QX41/QX41-S1/ QX41-S2									
	QX71									
	RX41C4									
64 inputs	LX42C4	2 Fujitsu/Otax connectors	NPN or PNP	B	1:2	XW2Z-RI□□□-□□MN	2	---		
	QX42/QX42-S1									
	QX82/QX82-S1									
	RX42C4									
Output Units										
32 outputs	LY41NT1P	1 Fujitsu/Otax connector	NPN	A	1:2	XW2Z-RO□□□-□□MN	1	NPN outputs	G70A-ZOC16-3	2
	QY41P									
	QY71									
	RY41NT2P	1 Fujitsu/Otax connector	PNP			XW2Z-RO□□□-□□MN	1	PNP outputs	G70A-ZOC16-4	2
	LY41PT1P									
	RY41PT1P									
64 outputs	RY41PT2H	2 Fujitsu/Otax connectors	NPN	B	XW2Z-RO□□□-□□MN	2	NPN outputs	G70A-ZOC16-3	4	
	LY42NT1P									
	RY42NT2P									
	QY42P									
	LY42PT1P	2 Fujitsu/Otax connectors	PNP		XW2Z-RO□□□-□□MN	2	PNP outputs	G70A-ZOC16-4	4	
RY42PT1P										
QY82P										
Mixed I/O Units										
32 inputs and 32 outputs	RH42C4NT2P (Input side)	2 Fujitsu/Otax connectors	NPN or PNP	B	1:2	XW2Z-RI□□□-□□MN	1	---		
	RH42C4NT2P (Output side)		NPN			XW2Z-RO□□□-□□MN	1	NPN outputs	G70A-ZOC16-3	2
	QH42P (Input side)	2 Fujitsu/Otax connectors	NPN or PNP			XW2Z-RI□□□-□□MN	1	---		
	QH42P (Output side)		NPN			XW2Z-RO□□□-□□MN	1	NPN outputs	G70A-ZOC16-3	2
	QX41Y41P (Input side)	2 Fujitsu/Otax connectors	NPN or PNP			XW2Z-RI□□□-□□MN	1	---		
	QX41Y41P (Output side)		NPN			XW2Z-RO□□□-□□MN	1	NPN outputs	G70A-ZOC16-3	2
	LH42C4NT1P (Input side)	2 Fujitsu/Otax connectors	NPN or PNP			XW2Z-RI□□□-□□MN	1	---		
	LH42C4NT1P (Output side)		NPN			XW2Z-RO□□□-□□MN	1	NPN outputs	G70A-ZOC16-3	2
	LH42C4PT1P (Input side)	2 Fujitsu/Otax connectors	NPN or PNP			XW2Z-RI□□□-□□MN	1	---		
	LH42C4PT1P (Output side)		PNP			XW2Z-RO□□□-□□MN	1	PNP outputs	G70A-ZOC16-4	2

Note: Cables that can be connected to the QX81, QX81-S2, and QY81P have not been prepared.

* The box □ is replaced by the cable length. For details on the types, refer to page 13.

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability: Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

Note: Do not use this document to operate the Unit.

OMRON Corporation Industrial Automation Company

Kyoto, JAPAN

Contact : www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

OMRON ASIA PACIFIC PTE. LTD.

438B Alexandra Road, #08-01/02 Alexandra
Technopark, Singapore 119968
Tel: (65) 6835-3011 Fax: (65) 6835-3011

OMRON ELECTRONICS LLC

2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388

Authorized Distributor:

©OMRON Corporation 2002-2025 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_1_9

Cat. No. J087-E1-12 0525 (1092)