# **VeriSafe<sup>™</sup> Insulation Piercing Connector**

## applications

The VeriSafe™ Insulation Piercing Connector provides a fast, secure, and reliable way to terminate AVT sensor leads. The compact connector design accommodates up to two taps in a single housing that fully insulates both connections. The patent pending connector allows taps to be made without compromising the integrity of conductors and includes integrated strain relief. Installation is fast and easy without the need to remove insulation. Ideal for new and retrofit applications, connections can be made without modifying existing conductor runs.



VS-CKP1K4/0-500







# 200

## specifications

Insulation piercing connector for copper wire with two mechanically isolated taps. Optimized for use with VeriSafe™ AVT sensor leads when prepared with Panduit ferrules, P/N F80-12.

#### technical information

Cable run:	AWG 14 - 3/0: Copper conductors, Solid or stranded Class B & C, except 3/0 STR only.
	AWG 4/0 - 500 MCM: Copper conductors, Stranded Class B & C.
	Not rated for flexible strand classes.
Taps:	(2) 14 – 16 AWG stranded Class K
	For VeriSafe AVT sensor leads prepared with F80-12 ferrules
Connector materials:	Housing – polyamide
	Insulator – elastomeric polymer
Operating temperature:	Up to 90°C (194°F)
Voltage range:	14 - 3/0 AWG: 600V maximum
	AWG 4/0 - 500 MCM: 1000V maximum

### key features and benefits

Compact and space saving:	Terminate two taps with a single connector
	Fewer parts, less space needed for each installation
	Optimized for use with VeriSafe™ Absence of Voltage Tester sensor leads
Fast installation:	Insulation piercing design allows for installation without the need to strip insulation from conductors
	Easily retrofit existing cable runs without modifying conductors
Fully insulated design:	Safe and reliable connections
Secure connections:	Taps are made without compromising the integrity of conductors
	Housing includes integrated strain relief
Flexible design:	Family of connectors covers a wide range of cable runs
	Suitable for new or retrofit applications



#### **Insulation Piercing Connectors**

VS-CKP14-6

VeriSafe™ Insulation
Piercing Connection Kit
for Tapping 14 to 6 AWG
conductors. Kit includes
3 connectors for
installation of 1 AVT.

VS-CKP4-000

VeriSafe™ Insulation Piercing Connection Kit for Tapping 4 to 3/0 AWG conductors. Kit includes 3 connectors for installation of 1 AVT.


VS-CKP1K4/0-500

VeriSafe<sup>™</sup> Insulation Piercing Connection Kit for Tapping AWG 4/0 to 500MCM conductors. Rated for 1KV installations. Kit includes 3 connectors for installation of 1 AVT.


## **VeriSafe™ Insulation Piercing Connector**

#### part information

Part Number	Product Description	
<u>VS-CKP14-6</u>	VeriSafe™ Insulation Piercing Connection Kit for Tapping 14 to 6 AWG conductors. Kit includes 3 connectors for installation of 1 AVT.	
<u>VS-CKP4-000</u>	VeriSafe™ Insulation Piercing Connection Kit for Tapping 4 to 3/0 AWG conductors. Kit includes 3 connectors for installation of 1 AVT.	
VS-CKP1K4/0-500	VeriSafe™ Insulation Piercing Connection Kit for Tapping AWG 4/0 to 500MCM conductors. Rated for 1KV installations. Kit includes 3 connectors for installation of 1 AVT.	

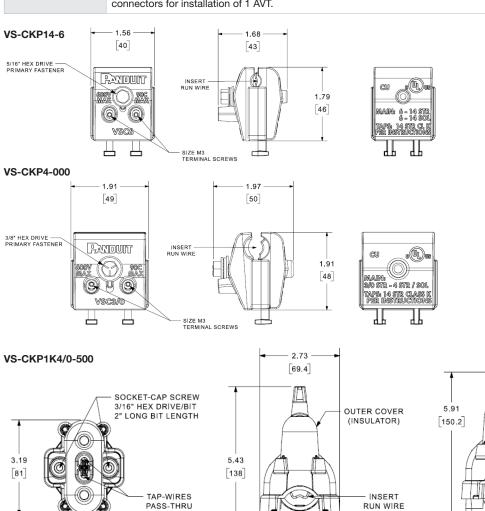

\*Dimensions are in inches [millimeters]

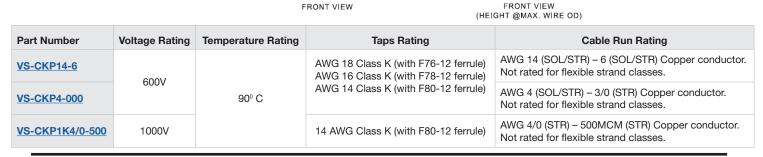

#### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA Phone: 800.777.3300 PANDUIT EUROPE LTD. London UK Phone: 44.20.8601.7200

OUTER COVER OPENINGS

BEFORE TERMNATION

> PANDUIT SINGAPORE PTE. LTD. Republic of Singapore Phone: 65.6305.7575

PANDUIT JAPAN Tokyo, Japan Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA Guadalaiara Mexico Phone: 52.33.3777.6000

FRONT VIEW

3.98

101

PANDUIT AUSTRALIA PTY. LTD. Victoria Australia Phone: 61.3.9794.9020





cs@panduit.com





TOP VIEW