



S1A4761509

ATV320/ATV32  
ATV340/ LXM32

EMC filters  
VW3A4420 ... VW3A4426  
VW3A4461 - VW3A4462



## **DANGER**

### **HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH**

- Only appropriately trained persons who are familiar with and fully understand the contents of the present manual and all other pertinent product documentation and who have received all necessary training to recognize and avoid hazards involved are authorized to work on and with this equipment.
- Installation, adjustment, repair and maintenance must be performed by qualified personnel.
- Verify compliance with all local and national electrical code requirements as well as all other applicable regulations with respect to grounding of all equipment.
- Before performing work and/or applying voltage on the equipment, follow the instructions given in the appropriate installation manual.

**Failure to follow these instructions will result in death or serious injury.**

## **CAUTION**

### **SHARP EDGES**



Use all necessary personal protective equipment (PPE) such as gloves when performing any type of work whatsoever on or with this product.

**Failure to follow these instructions can result in injury or equipment damage.**

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this product.

© 2025 Schneider Electric. All Rights Reserved.

**UK  
CA**

**MANUFACTURER**  
**Schneider Electric Industries SAS**  
35 rue Joseph Monier  
Rueil Malmaison 92500 France

**UK REPRESENTATIVE**  
**Schneider Electric Limited**  
Stafford Park 5  
Telford, TF3 3BL United Kingdom


**EAC**

Опция для продуктов Altivar и Altistart.  
Пожалуйста, обратитесь к сообщению о преобразователе частоты EAC / программном сартере в приложении к началу работы, размещенном на веб-сайте производителя. Авторизованный поставщик в Республике Казахстан:  
ТОО «Шнейдер Электрик»  
Адрес: 050010, РК, г. Алматы, пр. Достык, 38, бизнес-центр «Кен Дала», 5 этаж, левое крыло.  
Тел.: +7 (727) 339 23 57  
Номер службы поддержки клиентов:  
Тел.: +7 (727) 339 24 52

Altivar және Altistart өніміне арналған опция. Өндірушінің веб-сайтында орналастырылған «Жұмысқа кірісу» қосымшасындағы EAC жиілік инвертер / бірқалыпты іске қосу құрылғысы хабарламасына сілтеме жасауыңызды сұраймыз.  
Қазақстан Республикасындағы уәкілетті жеткізуші:  
ЖШС «Шнейдер Электрик»  
Мекен-жайы: 050010, ҚР, Алматы қаласы, Достық даңғылы, 38, «Кең дала» бизнес орталығы, 5-қабат, сол қанат.  
тел.: +7 (727) 339 23 57  
Клиенттерге қызмет көрсету нөмірі:  
тел.: +7 (727) 339 24 52


## VW3A4420... 26

		a	b	c	e	f	G	H	Ø
VW3A4420	mm	72	195	37	-	-	52	180	4.5
	(in.)	2.83	7.63	1.46	-	-	2.05	7.09	0.18
VW3A4421	mm	107	195	35	-	-	85	180	4.5
	(in.)	4.21	7.63	1.38	-	-	3.35	7.09	0.18
VW3A4422	mm	107	195	42	-	-	85	180	4.5
	(in.)	4.21	7.68	1.65	-	-	3.35	7.09	0.18
VW3A4423	mm	140	235	50	-	-	120	215	4.5
	(in.)	5.51	9.25	1.97	-	-	4.2	8.46	0.18
VW3A4424	mm	180	305	60	210	160	140	285	5.5
	(in.)	7.09	12.01	2.36	8.26	6.3	5.48	11.15	0.22
VW3A4425	mm	245	395	60	295	225	205	375	5.5
	(in.)	9.65	15.55	2.35	11.61	8.86	8.07	14.6	0.22
VW3A4426	mm	140	235	35	-	-	120	215	4.5
	(in.)	5.51	9.25	1.38	-	-	4.72	8.46	0.18

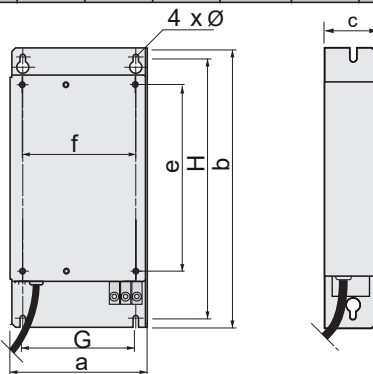


## VW3A4461, VW3A4462

		a	b	c	d	e	f	G	H	Ø
VW3A4461	mm	70	315	60	28	258	29	45	301	10
	(in.)	2.75	12.4	2.36	1.1	10.15	1.14	1.77	11.85	0.39
VW3A4462	mm	78	315	75	42	258	42	49	301	10
	(in.)	3.07	12.4	2.95	1.65	10.15	1.65	1.93	11.85	0.39

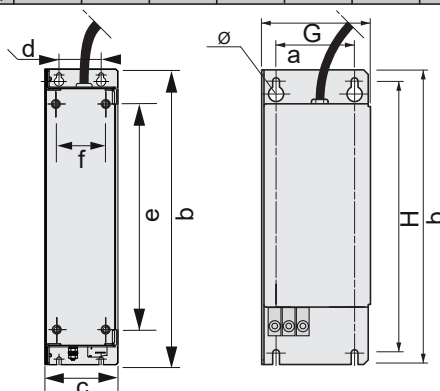


<b>VW3A4420</b>	9A	ATV320U02M2B...U07M2B LXM32●U45M2, U90M2
<b>VW3A4421</b>	16A	ATV320U11M2B...U15M2B LXM32●D18M2, D30M2
<b>VW3A4422</b>	15A	ATV320U04N4B...U40N4B ATV340U07N4●... ATV340U15N4● LXM32●U60N4, D12N4, D18N4, D30N4
<b>VW3A4423</b>	25A	ATV340U22N4●... ATV340U75N4● LXM32●D72N4
<b>VW3A4424</b>	47A	ATV320U55N4B, U75N4B ATV320U55N4C, U75N4C LXM32●D84N4, C10N4
<b>VW3A4425</b>	49A	ATV320D11N4●, D15N4●
<b>VW3A4426</b>	22A	ATV320U22M2B
<b>VW3A4461</b>	6.5A	ATV320U04N4B...ATV320U15N4B
<b>VW3A4462</b>	13.7A	ATV320U22N4B ...ATV320U40N4B



### VW3A4424, VW3A4425, VW3A4461, VW3A4462

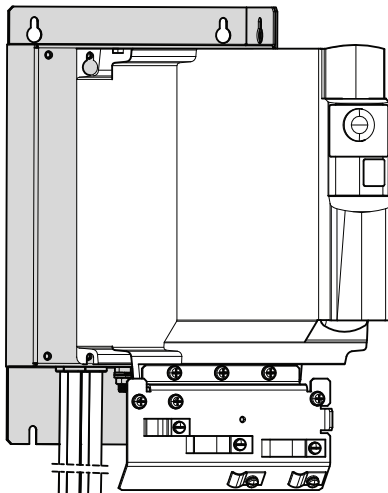

L1 - L2 - L3

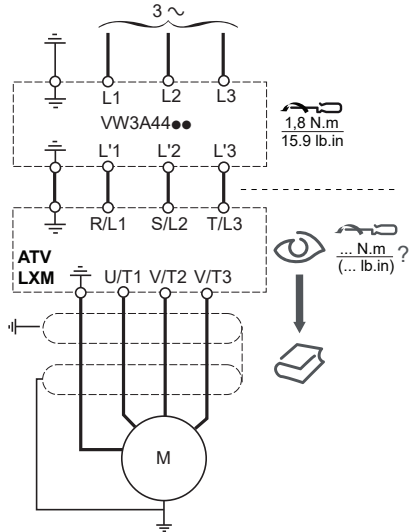

VW3A4420, VW3A4421, VW3A4426

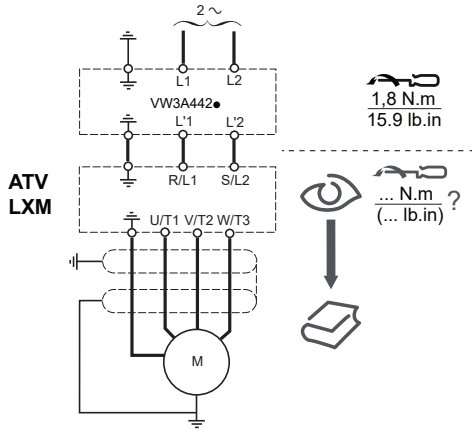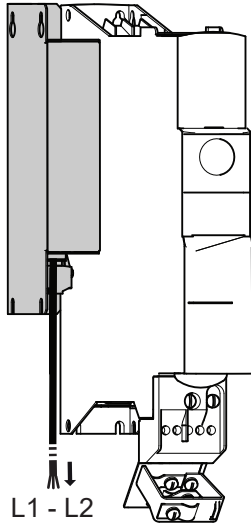

VW3A4422, VW3A4423

