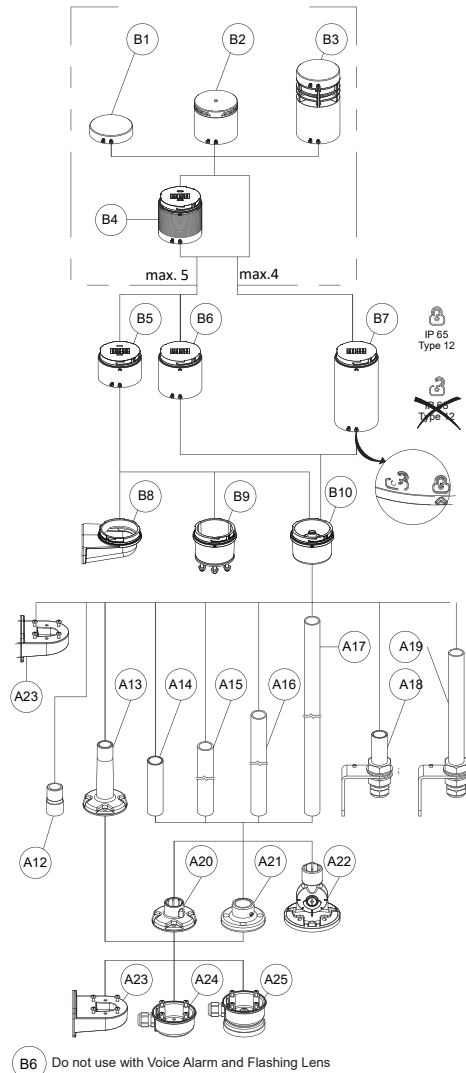


▲ CAUTION / ATTENTION / ATENCIÓN		
BRIGHT LIGHT, LOUD ALARM SOUND AND SHARP EDGES OPERATING HAZARDS - Wear protective gloves when commissioning/servicing the products. - High intensity LED light. Do not expose eyes to light source for long duration. - Do not expose to loud alarm sounds for prolonged periods. Failure to follow these instructions can result in injury.	LIUMIÈRE VIVE, ALARME SONORE PUISSANTE ET ARÊTES VIVES RISQUES LIÉS À L'UTILISATION - Portez des gants de protection lors de la mise en service/de l'entretien des produits. - Lumière LED haute intensité. N'exposez pas vos yeux à cette source de lumière pendant une trop longue durée. - Ne vous exposez pas à des sons d'alarme forts pendant des périodes prolongées. Le non-respect de ces instructions peut provoquer des blessures.	LUZ BRILLANTE, ALARMA SONORA FUERTE Y BORDOS AFILADOS PELIGROS DE FUNCIONAMIENTO - Utilice guantes de protección durante la puesta en marcha y el mantenimiento de los productos. - Luz LED de alta intensidad. No exponga los ojos a la fuente de luz durante mucho tiempo. - No se exponga a sonidos de alarma fuertes durante períodos prolongados. Si no se siguen estas instrucciones, se producirán lesiones.
▲ ATTENZIONE / 小心 / 注意		
LUCE INTENSA, ALLARME ACUSTICO FORTE E SPIGOLI VIVI PERICOLI DI FUNZIONAMENTO - Indossare guanti protettivi durante la messa in servizio/manutenzione dei prodotti. - Luce LED ad alta intensità. Non esporre gli occhi alla fonte di luce per un periodo prolungato. - Non esporre a suoni di allarme forti per periodi prolungati Il mancato rispetto di queste istruzioni può provocare infortuni.	强光、刺耳警报声及锋利边缘操作危险 - 调试/维修产品时请佩戴防护手套。 - 高强度LED灯。请勿让眼睛长时间暴露光源中。 - 请勿长时间暴露于高分贝警报声中。 不遵循上述说明可能导致人身伤害。	明るい光、大きな警報音、鋭利な縁による操作上の危険 - 製品の試運転/修理時には保護手袋を着用してください。 - 高輝度LED灯の光源を長時間見つめないでください。 - 長時間、大きな警報音にさらさないでください。 これらの指示に従わない場合、傷害を負う恐れがあります。

Offer Overview / Aperçu de l'offre / Resumen de la oferta /
Panoramica dell'offerta / 优惠概述 / オファーの概要

For all Type 4, 4x, 12, 13 indoor use only on a flat surface.

Except Type 1 for (A14) (A15) (A16) (A17) (A18) (A19) (A22) and

Type 12 for (A12) (A20) (A21) (A23) (A24) (A25)

Current consumption of Bases (R5): 0mA (R6): 31mA (R7): 5mA

Configurations	Part Number	Part Description	Average Current Consumption (mA)	
			24VAC	24VDC
(B1) (B5) (B8)	XV6C21BL	24V Base With Wall Adapter & Cover	-	-
(B1) (B5) (B9)	XV6C21BP	24V Base With 3-Pin & Cover	-	-
(B1) (B5) (B10)	XV6C21B	24V Base Direct/ Tube & Cover	-	-
(B1) (B6) (B10)	XV6C51W	USB Direct/ Tube & Cover	-	-
(B1) (B7) (B10)	XV6C21M	AC Base Direct/ Tube & Cover	-	-
(B2)	XV6C9S	Buzzer 2 Tones	25	16
	XV6C9T	Buzzer 8 Tones	45	22
(B3)	XV6C9V	Editable Voice Alarm	-	110
(B4)	XV6C2	Steady Lens	24	28
	XV6C2-C	Steady Clear Lens	32	38
	XV6C5	Blinking Lens	30	30
	XV6C6	Flashing Lens	180	250
	XV6C29	Steady Clear Lens (Multi Colored)	29	32
(A12)	XVZ00	1/2" NPT Adapter	-	-
(A13)	XVZ02	Plastic Fixing Plate With Pole	-	-
(A14)	XVZ100	Alu Ø25mm Pole 100mm Length	-	-
(A15)	XVZ250	Alu Ø25mm Pole 250mm Length	-	-
(A16)	XVZ400	Alu Ø25mm Pole 400mm Length	-	-
(A17)	XVZ800	Alu Ø25mm Pole 800mm Length	-	-
(A18)	XVZ100T	L Bracket Alu Ø25mm Pole 100mm	-	-
(A19)	XVZ250T	L Bracket Alu Ø25mm Pole 250mm	-	-
(A20)	XVZ01	Plastic Fixing Plate	-	-
(A21)	XVZ11	Metal Fixing Plate	-	-
(A22)	XVZ06	Plastic Foldable Bracket	-	-
(A23)	XVZ09	Plastic Wall Mount Bracket	-	-
(A24)	XVZ07	Side Entry Adapter	-	-
(A25)	XVZ08	Magnetic Adapter	-	-

Mounting and Installation / Montage et installation / Montaje e instalación / Montaggio e installazione /
 安装 / 取り付けと設置

