

PowerLogic™ Current Sensors

Technical Datasheet

Solid Core, Split Core types, and Rogowski Coil

Schneider Electric's Current Transformers (CTs) offer secondary voltage AC or secondary amperage proportional to the primary (sensed) current. These CTs are designed for use with power meters, data loggers, chart recorders, and other instruments, providing a cost-effective means to convert electrical service amperages to a voltage or current compatible with monitoring equipment.

The Low Voltage CTs are available in Split Core and Solid Core models, with 0.333 Vac output versions. Current Output CTs are available in Split Core models with 5 A output versions.

Schneider Electric provides four proven models of PowerLogic™ Rogowski flexible core current transducers, ranging from 300 to 900 mm in length and operating within a current range of 50 to 5000 A.

Solid core CTs - Micro



Rogowski Coil



Split core CTs - Small, Medium and Large



Split core CTs - Micro



Solid Core CTs

The listed Current Transformers from Schneider Electric are a comprehensive offer, ideally suited for low voltage network, from 50 to 400 A. They deliver secondary output in the form of 0.333 V proportional to the current measured at the primary. They can be used in combination with measurement devices (switchboard instrumentation, Ammeters, kilowatt-hour meters, power-monitoring units and, control relays etc.).

Solution

- Perfect for new and existing installations and expansion projects in a variety of markets:
 - Commercial buildings
 - Industrial facilities
 - Data centers
 - Oil and Gas
 - Infrastructure

Benefits

- Safety: UL multi listed
- Installation: on cable or bar profiles
- Well adapted CTs as the accuracy class is better than rated accuracy
- CTs for coaxial cable
- CTs for cable or bar profile
- Tropicalized rating for harsh environmental condition

Features


- Option of CT primary selection: from 50 to 400 A I_p with 120% max. range
- Fully compatible with Schneider Electric's complete portfolio of industry leading metering products as well as third party measurement devices.
- Compliance with IEC measurement standards with accuracy Class 0.5
- Higher safety factor during installation and for facility
- For indoor use
- Low voltage output for safer installation

Conformity of Standards

- UL/CSA 61010-1
- UL/CSA 61010-2-030
- IEC/EN 61010-1
- IEC/EN 61010-2-030
- EN IEC 63000:2018
- UL/CSA 2808
- IEC 61869-2
- CE/UKCA certified

CT Principle

When the primary circuit of a Current Transformer is energized, the Current Transformer presents a very low impedance to the secondary circuit, resulting in a low secondary voltage across the burden.

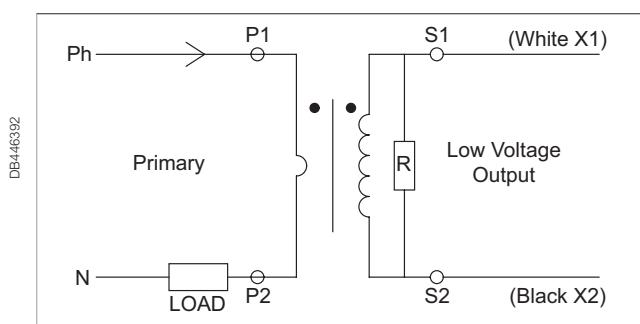

Solid Core LVCTs


CT selection - conductor rating aspects

- The choice depends on the conductor size and the maximum current of the primary circuit.
- Primary current can be measured through CT with let-through primary.

Solid Core LVCT - Micro Dimension

mm (in)

DB46391

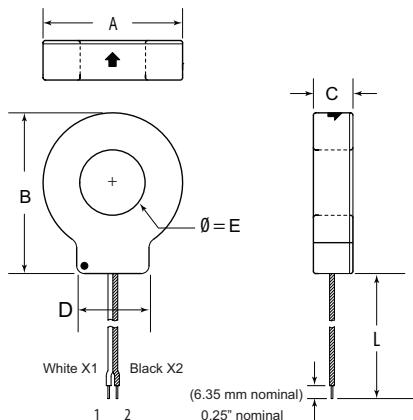

Model	L	A	B	C	D	E
METSECTLV10005U	1800 (70.9)	33 (1.3)	38 (1.5)	20 (0.8)	20 (0.8)	10 (0.4)
METSECTLV10010U						
METSECTLV25020U	1800 (70.9)	58 (2.3)	66 (2.6)	18 (0.7)	31 (1.2)	25 (1.0)
METSECTLV31040U	1800 (70.9)	71 (2.8)	78 (3.1)	25 (1.0)	36 (1.4)	31 (1.22)

Typical limits of current error and phase displacement error for measuring Current Transformers (classes from 0.1 to 1)

Accuracy Class	± Percentage current (ratio) error at percentage of rated current shown below				± Phase displacement at percentage of rated current as shown below							
					Minutes				Centiradians			
	5	20	100	120	5	20	100	120	5	20	100	120
0.1	0.4	0.2	0.1	0.1	15	8	5	5	0.45	0.24	0.15	0.15
0.2	0.75	0.35	0.2	0.2	30	15	10	10	0.9	0.45	0.3	0.3
0.5	1.5	0.75	0.5	0.5	90	45	30	30	2.7	1.35	0.9	0.9
1.0	3.0	1.5	1.0	1.0	180	90	60	60	5.4	2.7	1.8	1.8

50 - 100 Amp



METSECTLV10005U
METSECTLV10010U

200 Amp



METSECTLV31040U

400 Amp



METSECTLV25020U

Solid Core LVCTs

Technical Specification


Type	Solid Core
Output at rated current	0.333 Vac
Accuracy	Class 0.5 as per IEC 61869-2
Frequency	50/60 Hz \pm 3
Leads	18 AWG Twisted pair, 1.8m (6 ft.) standard length
Dielectric strength	3310 Vrms, 60 Hz, 5 Seconds.
Rated dynamic current (I_{dyn})	2.5 I_{th}
Operating temperature range	-40...85 °C (-40...185 °F)
Storage temperature range	-50...105 °C (-58...221 °F)
Humidity range	0-95% non-condensing
Max. voltage L-N sensed conductor	600 Vac (basic insulation rating)
Altitude of operation	3000 m max.
Mounting location	Not suitable for wet locations. For indoor use only.
Approvals	UL/CSA 61010-1, UL/CSA 61010-2-030, IEC/EN 61010-1, IEC/EN 61010-2-030, EN IEC 63000:2018, UL/CSA 2808
Installation category	Cat III, pollution degree 2

Commercial Reference Scheme

CT with let-through primary	CT internal type	Internal profile type and Dimension (mm (ln))	Ip/0.333 V rating ⁽⁺³⁾ (A)	Accuracy class	Rated short time thermal current I_{th} (kA)	CT Commercial reference	
Solid Core CT (cable)							
	Micro		10 (3.9)	50	0.5	0.5	METSECTLV10005U
				100	0.5	1	METSECTLV10010U
			25 (1.0)	200	0.5	2	METSECTLV25020U
			31 (1.22)	400	0.5	4	METSECTLV31040U

⁽⁺³⁾ Maximum rated current (Imax) is 120% of the primary current (Ip).

Representation of Commercial Reference Numbers for Solid Core LVCTs

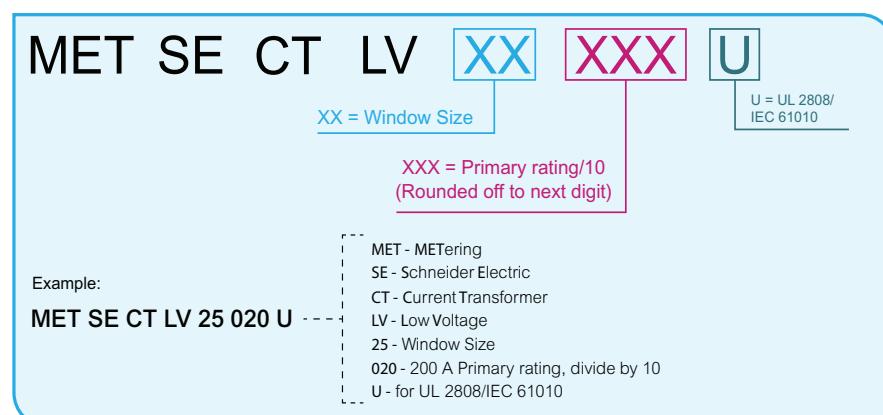

Commercial Reference Number	Description
METSECTLV10005U	Solid core LVCT, 50 A primary, 0.333 V output, 1.8m (6 ft.) lead length
METSECTLV10010U	Solid core LVCT, 100 A primary, 0.333 V output, 1.8m (6 ft.) lead length
METSECTLV25020U	Solid core LVCT, 200 A primary, 0.333 V output, 1.8m (6 ft.) lead length
METSECTLV31040U	Solid core LVCT, 400 A primary, 0.333 V output, 1.8m (6 ft.) lead length

Split Core CTs and LVCTs

The listed Split Core Current Sensors from Schneider Electric are a comprehensive offer, ideally suited for low voltage network, from 50 to 2400 A. They deliver secondary output in the form of 0.333 V or 5 A proportional to the current measured at the primary. They can be used in combination with measurement devices (switchboard instrumentation, Ammeters, kilowatt-hour meters, power-monitoring units, control relays etc.). Split Core CTs are available in four distinctive frame sizes for LVCT options and three frame sizes for 5 A options to accomodate different sizes of bus bars or round cables.

The solution for

- Perfect for new and existing installations and expansion projects in a variety of markets targeting retrofit application:
 - Commercial buildings
 - Industrial facilities
 - Data centers
 - Oil and Gas
 - Infrastructure

Benefits


- Safety: UL multi listed
- Well adapted Current Transformers as the accuracy class is better than rated accuracy
- Current Transformers for coaxial cable
- Current Transformers for cable or bar profile
- Tropicalized rating for harsh environmental condition
- Quick retrofitment in existing panels

Features


- Option of Current Transformers primary selection: from 50 to 2400 A Ip with 120% max. range
- Fully compatible with Schneider Electric's complete portfolio of industry leading metering products as well as third party measurement devices.
- Compliance with IEC measurement standards with accuracy Class 1
- Higher safety factor during installation and for facility
- For indoor use
- Low voltage output for safer installation
- 0 to 5 A secondary current for pairing with existing instrumentation

CT Principle

When the primary circuit of a Current Transformers is energized, the CTs presents a very low impedance to the secondary circuit, resulting in a low secondary voltage across the burden.

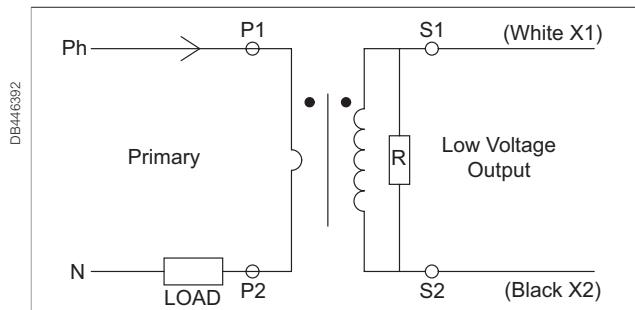

When the primary circuit is energized, the measurement equipment acts as a short circuit which keeps the secondary voltage very low. This voltage increases significantly if the short circuit is removed.

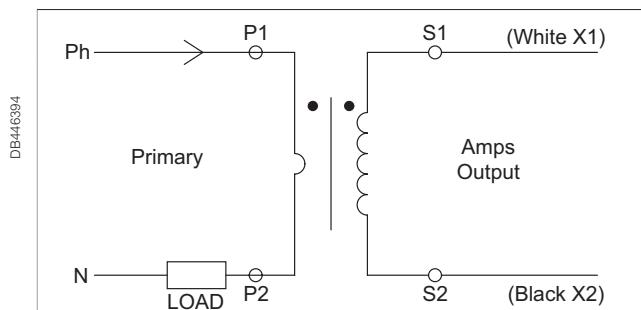


NOTE: Always keep the secondary circuit connected to low impedance path or short the current signal terminals of the measuring instrument.

Conformity of Standards

- BS/EN 61869-2:2012
- UL 2808 multi listed
- EN 61010-1
- CE/UKCA certified
- UL/CSA 61010-1
- UL/CSA 61010-2-030
- IEC/EN 61010-1
- IEC/EN 61010-2-030
- EN IEC 63000:2018
- UL/CSA 2808
- IEC 61869-2

Mounting Method

CT Mounting

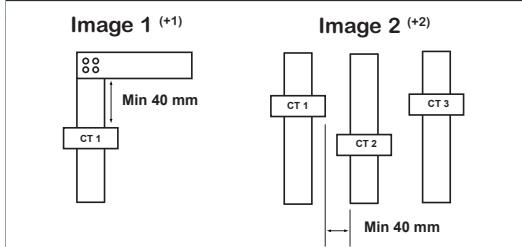

(¹) To install CS in Elbow joint of the busbars, it is recommended to separate them at a minimum of 40 mm (1.57 in) rating from 1000 to 3000 A CT.

(²) To reduce magnetic interference between CS on adjacent busbars, it is recommended to separate them at a minimum of 40 mm (1.57 in) rating from 1000 to 3000 A CT.

Split Core CTs and LVCTs

Technical Specification


Type	Split Core (LVCT frame size - small, medium and large)	Split Core (LVCT frame size - micro)	5 A Split Core (frame size - small, medium and large)
Output at rated current	0.333 Vac	0.333 Vac	5 A
Accuracy	Class 1 as per IEC 61869-2*	Class 1 as per IEC 61869-2*	Class 1 as per IEC 61869-2**
Frequency	50/60 Hz ± 3	50/60 Hz ± 3	50/60 Hz ± 3
Leads	16 AWG Twisted pair, 8 ft. (2.4 m) standard length	18 AWG Twisted pair, 6 ft. (1.8 m) standard length	16 AWG twisted pair, 8 ft (2.4 m) standard length, 14 AWG twisted pair, 8 ft (2.4 m) standard length (applies to METSECTSP5A2020U and METSECTSP5A3060U only)
Dielectric strength	5400 Vrms, 60 Hz, 60 s	METSECTLV1005U : 2210 Vrms, 60 Hz, 5 s. All other Split Core models : 3310 Vrms 60 Hz, 5 s	5400 Vrms, 60 Hz, 60 s
Rated dynamic current (I_{dyn})	2.5 I_{in}	2.5 I_{in}	2.5 I_{in}
Operating temperature range	-15...60 °C (5...140 °F)	0...70 °C (32...158 °F)	-15...60 °C (5...140 °F)
Storage temperature range	-40...70 °C (-40...158 °F)	-40...105 °C (-40...221 °F)	-40...70 °C (-40...158 °F)
Humidity range	0...95% non-condensing	0...95% non-condensing	0...95% non-condensing
Max. voltage L-N sensed conductor	600 Vac (basic insulation rating)	METSECTLV1005U : 250 Vac (basic insulation rating) All other Split Core models : 600 Vac (basic insulation rating)	600 Vac (basic insulation rating)
Altitude of operation	2000 m (6561.68 ft) max.	2000 m (6561.68 ft) max.	2000 m (6561.68 ft) max
Mounting location	Not suitable for wet locations. For indoor use only.	Not suitable for wet locations. For indoor use only.	Not suitable for wet locations. For indoor use only
Approvals	UL/CSA 61010-1, UL/CSA 61010-2-030, IEC/EN 61010-1, IEC/EN 61010-2-030, EN IEC 63000:2018, UL/CSA 2808	UL/CSA 61010-1, UL/CSA 61010-2-030, IEC/EN 61010-1, IEC/EN 61010-2-030, EN IEC 63000:2018, UL/CSA 2808 L2808	UL/CSA 61010-1, UL/CSA 61010-2-030, IEC/EN 61010-1, IEC/EN 61010-2-030, EN IEC 63000:2018, UL/CSA 2808
Installation category	Cat III, pollution degree 2	Cat III, pollution degree 2	Cat. III
Instrument safety factor	N/A	N/A	FS ≤ 5
Pollution degree	N/A	N/A	2

*Not applicable for 50 A – class 1 for ratio error and Phase displacement < ± 144 Minutes.

**Not applicable for small internal type 200...300 A CTs - Class 1 for ratio error, Phase displacement < ± 300 Minutes.


Representation of Commercial Reference Numbers for Core LVCTs

DB446396

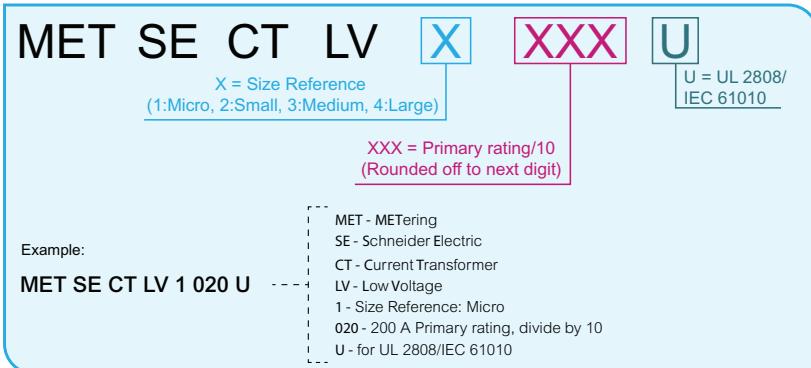

Representation of Commercial Reference Numbers for UL2808 5 A Split Core

DB446397

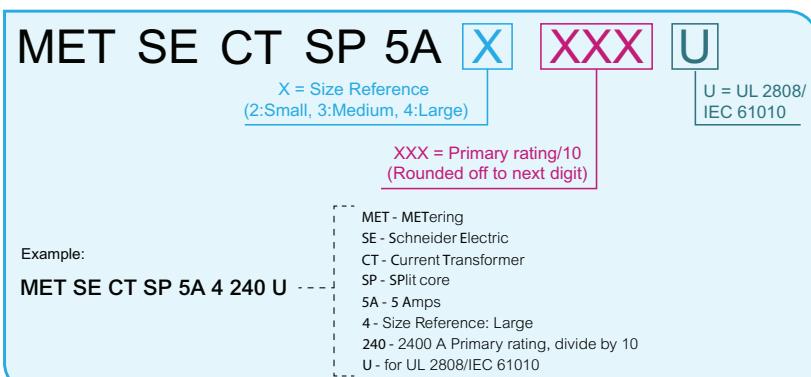

Split Core CTs and LVCTs

Commercial Reference Scheme


CS with let-through primary	CT internal type	Internal profile type and Dimension (mm (in))	Ip/0.333 V rating ⁽⁺³⁾ (A)	Accuracy class	Rated short time thermal current I _{th} (kA)	CT commercial reference
Split Core CT (bus bar)						
	Small	36 (1.4) 	100 200 300 400	1 1 1 1	10.4 10.8 10 13.8	METSECTLV2010U METSECTLV2020U METSECTLV2030U METSECTLV2040U
	Medium	63 (2.47) 	600 800	1 1	20.6 35	METSECTLV3060U METSECTLV3080U
	Large	63 (2.47)  146 (5.73)	800 1000 1200 1600 2000 2400	1 1 1 1 1 1	35 34 41 87 109 105	METSECTLV4080U METSECTLV4100U METSECTLV4120U METSECTLV4160U METSECTLV4200U METSECTLV4240U
Split Core CT (cable)						
	Micro	10 (0.39) 	50	1	0.5	METSECTLV1005U
		16 (0.63) 	100	1	1	METSECTLV1010U
		32 (1.26) 	200	1	2	METSECTLV1020U
CT with let-through primary	CT internal type	Internal profile type and Dimension (mm(in))	Ip 5 A rating ⁽⁺³⁾ (A)	Accuracy class 1 at VA rating	Rated short time thermal current I _{th} (kA)	CT commercial reference
5 A Split-sore CT (bus bar)						
	Small	36 (1.4) 	200 300 400	2.5 2.5 5	12 11.2 9.3	METSECTSP5A2020U METSECTSP5A2030U METSECTSP5A2040U
	Medium	63 (2.47) 	600 800	5 7.5	28 30	METSECTSP5A3060U METSECTSP5A3080U
	Large	63 (2.47)  146 (5.73)	800 1200 1600 2000 2400	5 10 10 10 10	60 71 95 93.8 112	METSECTSP5A4080U METSECTSP5A4120U METSECTSP5A4160U METSECTSP5A4200U METSECTSP5A4240U

⁽⁺³⁾ Maximum rated current (I_{max}) is 120% of the primary current (I_p).

Split Core CTs and LVCTs

Split Core LVCT Micro Dimension


mm (in)

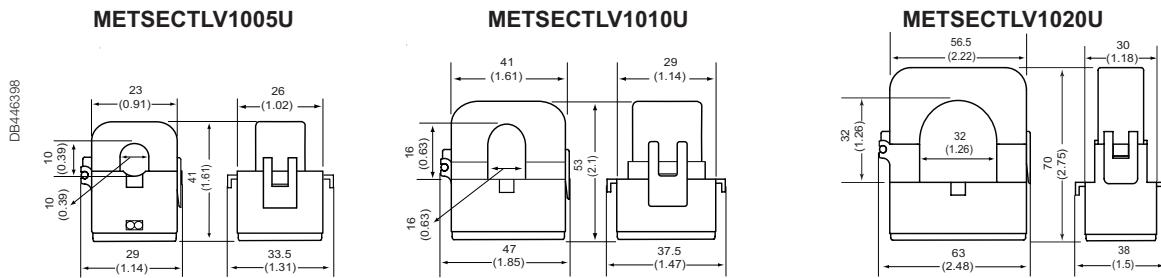


Split Core LVCT (Small, Medium and Large) Dimension

mm (in)


100...400 A



600...800 A

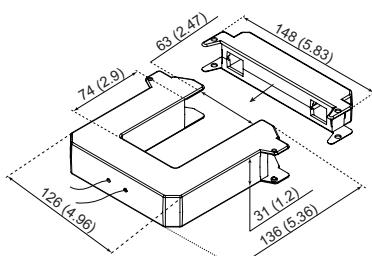

800...2400 A

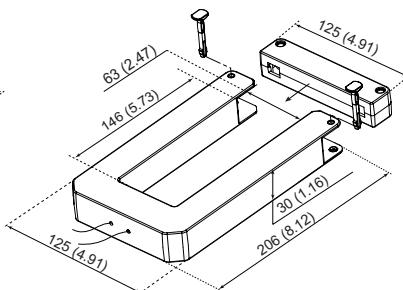


METSECTLV2010U
METSECTLV2020U
METSECTLV2030U
METSECTLV2040U

METSECTLV3060U
METSECTLV3080U


METSECTLV4080U
METSECTLV4100U
METSECTLV4120U
METSECTLV4160U
METSECTLV4200U
METSECTLV4240U

Split Core 5 A CT (Small, Medium and Large) Dimension


mm (in) 200...400 A



600...800 A

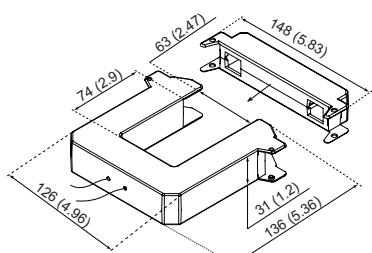

800...2400 A

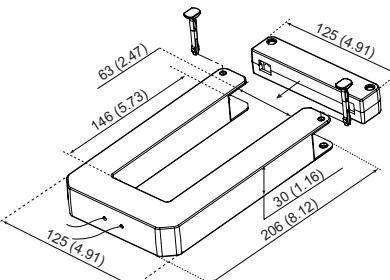

METSECTSP5A2020U
METSECTSP5A2030U
METSECTSP5A2040U

METSECTSP5A3060U
METSECTSP5A3080U

METSECTSP5A4080U
METSECTSP5A4120U
METSECTSP5A4160U
METSECTSP5A4200U
METSECTSP5A4240U

Rogowski Coil Current Transducer Technical Datasheet

Schneider Electric is the global specialist in energy management with the most complete power monitoring product line. From simple indicators (analogue meters) and CTs, to world class energy meters and powerful compact power meters, these proven products satisfy any requirement.

Schneider Electric currently offers four proven models of PowerLogic™ Rogowski flexible core Current Transducer. These are available from 300 to 900 mm in length operating in a current range of 50 to 5000 A.

PB118060



Rogowski Coil Current Transducer

The CTRx Series of Rogowski flexible rope style Current Transducer provide secondary AC voltage proportional to the primary (sensed) current. Recommended to use with Schneider make EM35xxA, iEM35x5 and EM42xx series power meters.


The CTRx Series Current Transducers provide a cost-effective means to transform electrical service amperages to a voltage compatible with monitoring equipment. The flexible core makes it easy to fit in tight enclosures. These products provide reinforced insulation between the sensed conductor and the output leads.

Technical specification

Specification for commercial reference	METSECTR30500U, METSECTR46500U, METSECTR60500U, METSECTR90500U
Range	PowerLogic™
Product or component type	Current Transducer
Accessory/part category	Measurement accessory
Range compatibility	PowerLogic™ EM3500 - EM3555A EM3502A EM3560 EM3550A EM3560 EM3561A PowerLogic™ EM4200 - EM4236 EM4235 Acti9 iEM3000 - iEM3555 iEM3565
Current transformer type	Flexible core
Specification	
Connecting cable - flying lead	2.4 m (8 ft), 600 V L-N AC max.
Connecting cable specification	1000 V awm style 20167 cable with 24 AWG leads
Coil current range	50...2000 A for METSECTR30500U All other models 50...5000 A
Output voltage	58.3 mV/kA @ 50 Hz, 70 mV/kA @ 60 Hz
Network frequency of coil	50/60 Hz
Measurement accuracy of coil	Class 1-A1 as per IEC 61869-10
Installation category of coil	600 Vac Cat IV
Pollution degree of coil	2
Environmental characteristics	
Approvals	ANSI/CAN/UL 2808 Ed.3, CSA C22.2 NO. 61010-1-12, IEC 61010-1, EN IEC 63000:2018
Ambient air temperature for operation	-35...75 °C upto 2 kA -35...60 °C from 2...5 kA
Ambient air temperature for storage	-40...90 °C
Humidity range	0...95 % non-condensing
Altitude	2000 m (6561.68 ft) max.
Protection degree	IP65
Commercial Reference Numbers	
METSECTR30500U	CT Rogowski 300 mm (11.8 in) coil, 2000 A, Lead length 2.4 m (8 ft)
METSECTR46500U	CT Rogowski 460 mm (18.1 in) coil 5000 A, Lead length 2.4 m (8 ft)
METSECTR60500U	CT Rogowski 600 mm (23.6 in) coil 5000 A, Lead length 2.4 m (8 ft)
METSECTR90500U	CT Rogowski 900 mm (35.4 in) coil 5000 A, Lead length 2.4 m (8 ft)

Please contact your Schneider Electric representative for complete ordering information.

Rogowski Coil Current Transducer Dimensions

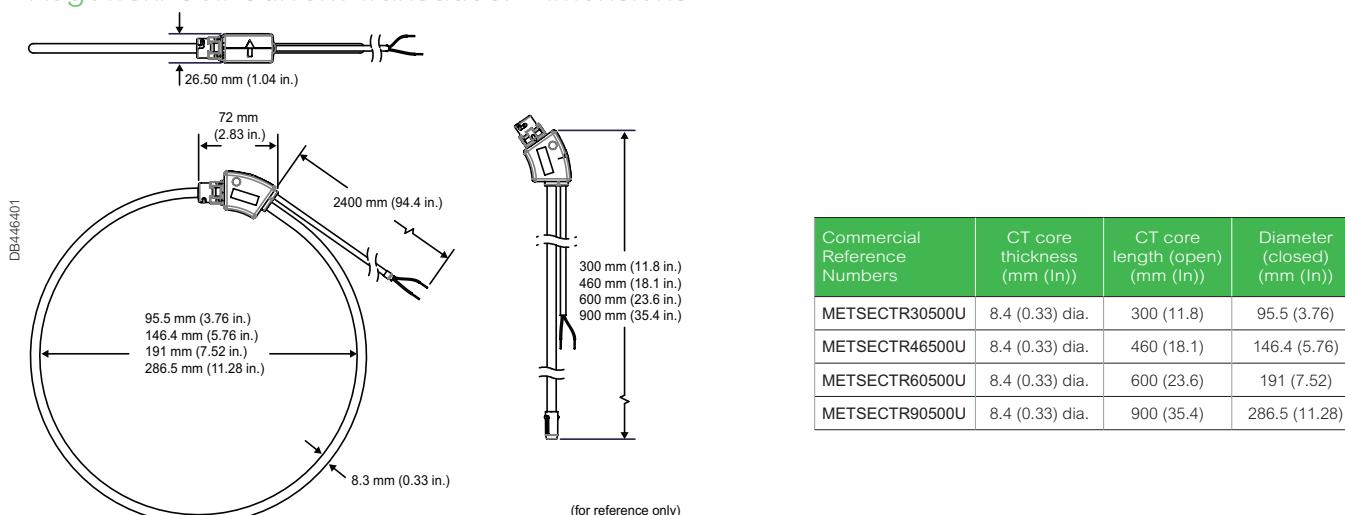

See the appropriate **Installation Guide** for correct installation instructions.



www.se.com

Schneider Electric Industries SAS
35, Rue Joseph Monier
CS 30323
92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 928 298 512 €
www.se.com

April 2025
PowerLogic™ UL 2808 Current Transformers
PLSED323102EN

As standards, specifications and designs develop from time to time, please ask for confirmation of the information given in this document.

© 2025- Schneider Electric. All rights reserved.
All trademarks are owned by Schneider Electric
Industries SAS or its affiliated companies.