

Product Environmental Profile

ACTASSI COPPER PATCH CORD LSZH






General information

| | |
|-----------------------------------|---|
| Representative product | ACTASSI COPPER PATCH CORD LSZH - ACTPC6ASFLS50YL |
| Description of the product | The main purpose of the Actassi copper patch cord is to transmit a communication signal for communication application in Data centers building. Similar product reference: Actassi Cat6 Patch Cord F/UTP 5M LSZH, ACTPC6FULS50WE Actassi Cat6 Patch Cord U/UTP 5M LSZH, ACTPC6UULS50WE |
| Functional unit | To transmit a communication signal on 1 m according to 10G Ethernet protocol, 400 MHz frequency, Cat. 6a category, during 10 years and a 100% use rate in accordance with the IEC 61156-5 standards. |



Constituent materials

| | | |
|-------------------------------|------|---------------------------------------|
| Reference product mass | 50 g | including the product, its packaging. |
|-------------------------------|------|---------------------------------------|

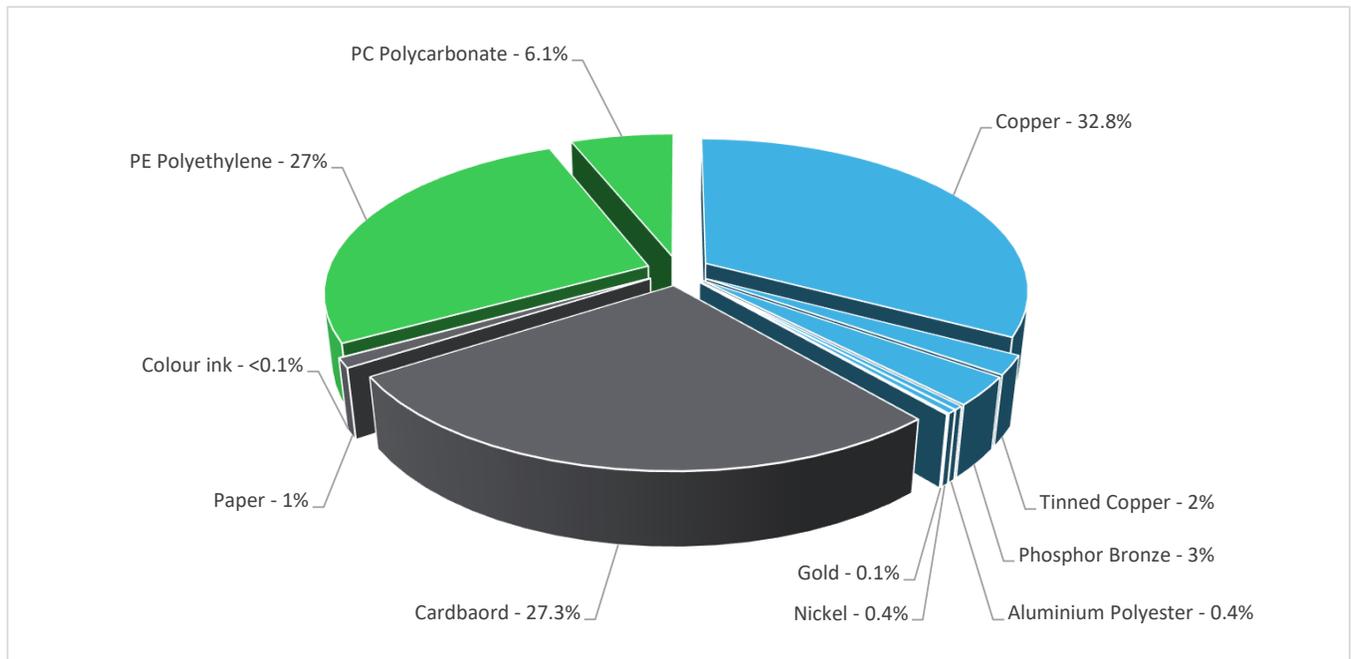

| | |
|----------|-------|
| Plastics | 33.1% |
| Metals | 38.7% |
| Others | 28.3% |



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

Additional environmental information


The ACTASSI COPPER PATCH CORD LSZH presents the following relevant environmental aspects

| | |
|----------------------|---|
| Manufacturing | Manufactured at a production site complying with the regulations |
| Distribution | Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 14 g, consisting of cardboard (96.43%), paper (3.57%) Product distribution optimised by setting up local distribution centres |
| Installation | The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted during the installation phase (including transport to disposal). |
| Use | The product does not require special maintenance operations. |
| End of life | End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: 79% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). |

Environmental impacts

| | | | | |
|---|---|--|--|--|
| Reference life time | 10 years | | | |
| Product category | Other equipments - Active product | | | |
| Installation elements | No special components needed | | | |
| Use scenario | Product dissipation is 0.001364 W @ 100% load rate and 0.001364 W @ Load rate: 100% of In & Use rate: 100% of the RLT | | | |
| Geographical representativeness | Europe | | | |
| Technological representativeness | The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production. | | | |
| Energy model used | Manufacturing | Installation | Use | End of life |
| | Manufacturing plant: Dongguan, China | Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27 | Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27 | Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27 |

| Compulsory indicators | | ACTASSI COPPER PATCH CORD LSZH - ACTPC6ASFLS50YL | | | | | |
|--|-------------------------------------|--|---------------|--------------|--------------|----------|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to mineral resources depletion | kg Sb eq | 2.53E-03 | 2.53E-03 | 0* | 0* | 0* | 0* |
| Contribution to the soil and water acidification | kg SO ₂ eq | 1.26E-03 | 9.42E-04 | 6.35E-05 | 3.16E-06 | 2.44E-04 | 1.04E-05 |
| Contribution to water eutrophication | kg PO ₄ ³⁻ eq | 2.34E-04 | 2.01E-04 | 1.46E-05 | 7.68E-07 | 1.47E-05 | 2.62E-06 |
| Contribution to global warming | kg CO ₂ eq | 4.56E-01 | 3.79E-01 | 1.41E-02 | 7.59E-04 | 5.85E-02 | 4.18E-03 |
| Contribution to ozone layer depletion | kg CFC11 eq | 4.02E-08 | 3.61E-08 | 2.85E-11 | 0* | 3.81E-09 | 2.22E-10 |
| Contribution to photochemical oxidation | kg C ₂ H ₄ eq | 1.06E-04 | 8.72E-05 | 4.52E-06 | 2.36E-07 | 1.34E-05 | 1.11E-06 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Net use of freshwater | m ³ | 2.37E-01 | 2.49E-02 | 0* | 0* | 2.12E-01 | 0* |
| Total Primary Energy | MJ | 6.45E+00 | 5.02E+00 | 1.99E-01 | 9.91E-03 | 1.17E+00 | 5.18E-02 |

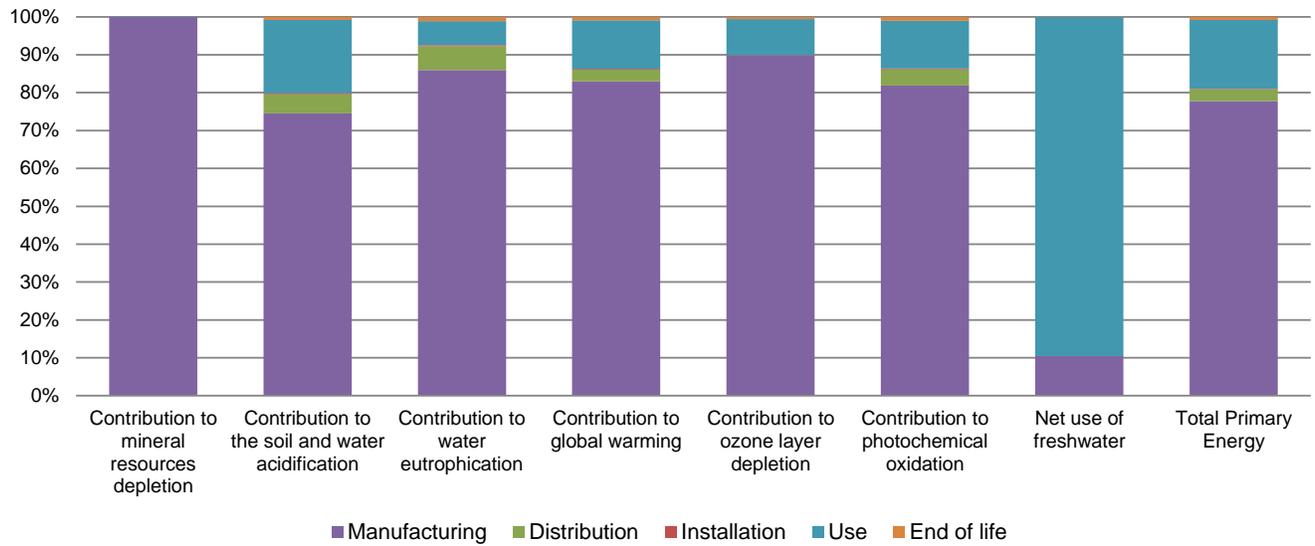

| Optional indicators | | ACTASSI COPPER PATCH CORD LSZH - ACTPC6ASFL50YL | | | | | | |
|---|------|---|---------------|--------------|--------------|----------|-------------|--|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life | |
| Contribution to fossil resources depletion | MJ | 4.71E+00 | 3.80E+00 | 1.98E-01 | 9.84E-03 | 6.65E-01 | 4.15E-02 | |
| Contribution to air pollution | m³ | 1.56E+02 | 1.52E+02 | 5.83E-01 | 3.03E-02 | 2.52E+00 | 3.69E-01 | |
| Contribution to water pollution | m³ | 6.05E+01 | 5.53E+01 | 2.32E+00 | 1.15E-01 | 2.42E+00 | 4.13E-01 | |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life | |
| Use of secondary material | kg | 1.56E-02 | 1.56E-02 | 0* | 0* | 0* | 0* | |
| Total use of renewable primary energy resources | MJ | 4.09E-01 | 2.60E-01 | 2.65E-04 | 0* | 1.49E-01 | 5.79E-05 | |
| Total use of non-renewable primary energy resources | MJ | 6.04E+00 | 4.76E+00 | 1.99E-01 | 9.89E-03 | 1.02E+00 | 5.17E-02 | |
| Use of renewable primary energy excluding renewable primary energy used as raw material | MJ | 3.60E-01 | 2.11E-01 | 2.65E-04 | 0* | 1.49E-01 | 5.79E-05 | |
| Use of renewable primary energy resources used as raw material | MJ | 4.88E-02 | 4.88E-02 | 0* | 0* | 0* | 0* | |
| Use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ | 5.31E+00 | 4.02E+00 | 1.99E-01 | 9.89E-03 | 1.02E+00 | 5.17E-02 | |
| Use of non renewable primary energy resources used as raw material | MJ | 7.33E-01 | 7.33E-01 | 0* | 0* | 0* | 0* | |
| Use of non renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | |
| Use of renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | |
| Waste categories | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life | |
| Hazardous waste disposed | kg | 5.06E+01 | 5.06E+01 | 0* | 0* | 0* | 4.32E-02 | |
| Non hazardous waste disposed | kg | 4.18E-01 | 1.99E-01 | 5.01E-04 | 1.03E-04 | 2.18E-01 | 1.59E-04 | |
| Radioactive waste disposed | kg | 2.00E-04 | 5.35E-05 | 3.57E-07 | 2.03E-08 | 1.46E-04 | 2.47E-07 | |
| Other environmental information | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life | |
| Materials for recycling | kg | 4.70E-02 | 4.95E-03 | 0* | 1.40E-02 | 0* | 2.81E-02 | |
| Components for reuse | kg | 0.00E+00 | 0* | 0* | 0* | 0* | 0* | |
| Materials for energy recovery | kg | 2.84E-04 | 0* | 0* | 0* | 0* | 2.84E-04 | |
| Exported Energy | MJ | 4.43E-05 | 4.17E-06 | 0* | 4.02E-05 | 0* | 0* | |

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.3, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators) except NUFW is mostly in use phase.

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request.

| | | | |
|--|------------------|-------------------------------------|--|
| Registration number | ENVPEP2105010_V3 | Drafting rules | PCR-ed3-EN-2015 04 02 |
| Date of issue | 02/2022 | Supplemented by | PSR-0001-ed3-EN-2015 10 16 |
| Validity period | 5 years | Information and reference documents | www.pep-ecopassport.org |
| <i>Independent verification of the declaration and data</i> | | | |
| Internal | X | External | |
| <i>The elements of the present PEP cannot be compared with elements from another program.</i> | | | |
| <i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i> | | | |

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP2105010_V3

© 2019 - Schneider Electric – All rights reserved

02/2022