

Product Environmental Profile

Contactor TeSys Deca 115A 440V 3P AC3 100…250V AC-DC coil EverLink

Local TeSys AC Contactors



Schneider
Electric




General information

Reference product	Contactor TeSys Deca 115A 440V 3P AC3 100…250V AC-DC coil EverLink - LC1D115AKUE
Description of the product	The main purpose of the product is to help disconnect circuit, realize pre-charge and main circuit open/close. With assigned voltage up to 1000V AC and rate current AC3 115A.
Description of the range	The range product report includes: rated current 115A-200A,3P-4P, Tesys Deca contactor,AC-DC, the representative product used for analysis is 3P 115A (product number: LC1D115AKUE) The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	Establish and cut off the supply of a downstream installation from an electrical and/or mechanical control characterised by the composition of the poles or type of contacts X, a rated voltage of Ue, a rated current Ie, a control circuit voltage Uc, with Np poles, and if applicable the specific specifications, in the Household/Commercial or Industrial application areas, according to the appropriate use scenario, and during the reference service life of the product of 20 years
Specifications are:	X = 3O Ue = up to 1000V Ie = AC3 115A Np = 3P Uc = 100-250V AC/DC



Constituent materials

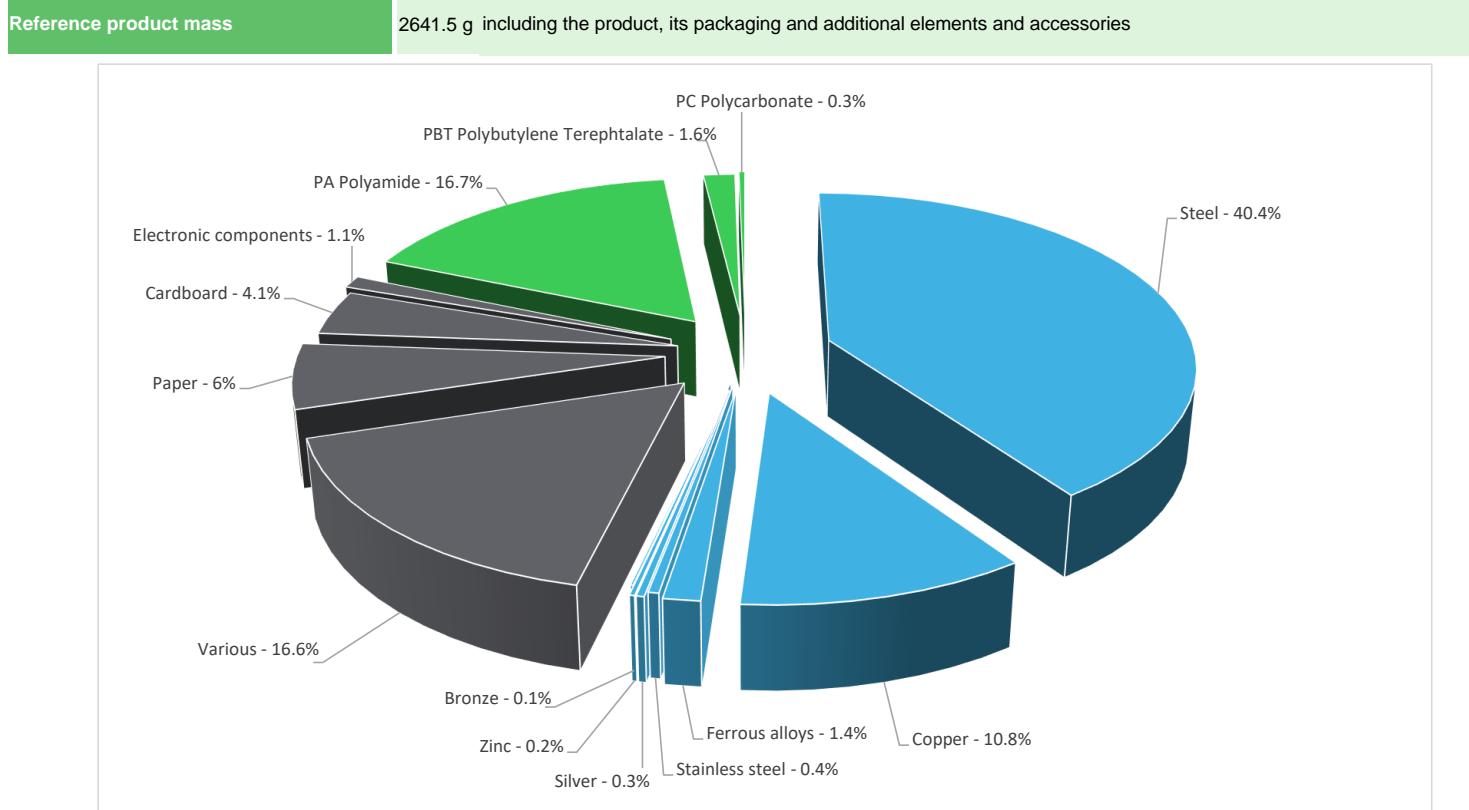

Plastics	18.60%
Metals	53.60%
Others	27.80%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website
<https://www.se.com/ww/en/work/support/green-premium/>

Additional environmental information

End Of Life	Recyclability potential:	78%	The recyclability rate was calculated from the recycling rates of each material making up the product with the exception of data using the ESR database. For materials or components using the ESR database or the absence of data the conservative hypothesis "0% recyclability" was used.
-------------	--------------------------	-----	---

Environmental impacts

Reference service life time	20 years				
Product category	Contactors - Industrial				
Installation elements	No special components needed				
Use scenario	Load rate: 50% of In Use time rate: 50% of RLT				
Time representativeness	The collected data are representative of the year 2024				
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and représentative of the actual type of technologies used to make the product.				
Geographical representativeness	Europe				
Energy model used	[A1 - A3] Electricity Mix; Low voltage; 2018; China, CN	[A5] Electricity Mix; Low voltage; 2018; Europe, EU-27	[B6] Electricity Mix; Low voltage; 2018; Europe, EU-27	[C1 - C4] Electricity Mix; Low voltage; 2018; Europe, EU-27	

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		Contactor TeSys Deca 115A 440V 3P AC3 100…250V AC-DC coil EverLink - LC1D115AKUE						
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	3.12E+02	2.59E+01	4.00E-01	2.90E-01	2.80E+02	5.45E+00	-5.37E+00
Contribution to climate change-fossil	kg CO2 eq	3.09E+02	2.35E+01	4.00E-01	2.77E-01	2.80E+02	5.39E+00	-5.27E+00
Contribution to climate change-biogenic	kg CO2 eq	2.88E+00	2.43E+00	0*	1.38E-02	3.74E-01	6.22E-02	-9.92E-02
Contribution to climate change-land use and land use change	kg CO2 eq	1.70E-05	1.33E-05	0*	0*	0*	3.64E-06	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	8.99E-06	7.74E-06	0*	3.76E-09	1.20E-06	5.22E-08	-8.77E-07
Contribution to acidification	mol H+ eq	1.84E+00	2.15E-01	2.53E-03	8.48E-04	1.60E+00	2.10E-02	-7.52E-02
Contribution to eutrophication, freshwater	kg (PO4)3- eq	3.12E-03	4.74E-04	0*	6.64E-06	7.67E-04	1.88E-03	-1.21E-05
Contribution to eutrophication marine	kg N eq	2.10E-01	2.23E-02	1.19E-03	3.69E-04	1.82E-01	4.10E-03	-3.68E-03
Contribution to eutrophication, terrestrial	mol N eq	3.03E+00	2.44E-01	1.30E-02	2.57E-03	2.73E+00	4.70E-02	-4.14E-02
Contribution to photochemical ozone formation - human health	kg COVNM eq	6.81E-01	7.98E-02	3.28E-03	5.88E-04	5.83E-01	1.41E-02	-1.66E-02
Contribution to resource use, minerals and metals	kg Sb eq	1.24E-02	1.24E-02	0*	0*	2.03E-05	5.95E-05	-1.73E-03
Contribution to resource use, fossils	MJ	7.89E+03	4.96E+02	5.57E+00	2.87E+00	7.13E+03	2.50E+02	-1.13E+02
Contribution to water use	m3 eq	2.04E+01	6.87E+00	0*	2.24E-02	9.91E+00	3.58E+00	-4.15E+00

Inventory flows Indicators		Contactor TeSys Deca 115A 440V 3P AC3 100…250V AC-DC coil EverLink - LC1D115AKUE						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.38E+03	1.02E+01	0*	3.77E-01	1.37E+03	1.57E+00	-1.05E+00
Contribution to use of renewable primary energy resources used as raw material	MJ	5.25E+00	5.25E+00	0*	0*	0*	0*	-4.01E+00
Contribution to total use of renewable primary energy resources	MJ	1.39E+03	1.54E+01	0*	3.77E-01	1.37E+03	1.57E+00	-5.06E+00
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	7.87E+03	4.77E+02	5.57E+00	2.87E+00	7.13E+03	2.50E+02	-1.13E+02
Contribution to use of non renewable primary energy resources used as raw material	MJ	1.90E+01	1.90E+01	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	7.89E+03	4.96E+02	5.57E+00	2.87E+00	7.13E+03	2.50E+02	-1.13E+02
Contribution to use of secondary material	kg	8.40E-05	8.40E-05	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	4.75E-01	1.60E-01	0*	5.21E-04	2.31E-01	8.33E-02	-9.67E-02
Contribution to hazardous waste disposed	kg	2.06E+02	2.01E+02	0*	0*	5.23E+00	3.03E-02	-1.41E+02
Contribution to non hazardous waste disposed	kg	5.16E+01	1.05E+01	1.40E-02	1.24E-01	4.03E+01	6.48E-01	-3.68E+00
Contribution to radioactive waste disposed	kg	1.18E-02	3.28E-03	9.98E-06	1.53E-05	8.43E-03	6.81E-05	-1.69E-03
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	2.11E+00	2.12E-01	0*	0*	0*	1.90E+00	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	2.80E-02	2.15E-03	0*	1.18E-02	0*	1.40E-02	0.00E+00
* represents less than 0.01% of the total life cycle of the reference flow								
Contribution to biogenic carbon content of the product	kg of C	0.00E+00						
Contribution to biogenic carbon content of the associated packaging	kg of C	9.18E-02						

Mandatory Indicators		Contactor TeSys Deca 115A 440V 3P AC3 100…250V AC-DC coil EverLink - LC1D115AKUE							
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	2.80E+02	0*	0*	0*	0*	0*	2.80E+02	0*
Contribution to climate change-fossil	kg CO2 eq	2.80E+02	0*	0*	0*	0*	0*	2.80E+02	0*
Contribution to climate change-biogenic	kg CO2 eq	3.74E-01	0*	0*	0*	0*	0*	3.74E-01	0*
Contribution to climate change-land use and land use change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	1.20E-06	0*	0*	0*	0*	0*	1.20E-06	0*
Contribution to acidification	mol H+ eq	1.60E+00	0*	0*	0*	0*	0*	1.60E+00	0*
Contribution to eutrophication, freshwater	kg (PO4)3- eq	7.67E-04	0*	0*	0*	0*	0*	7.67E-04	0*
Contribution to eutrophication marine	kg N eq	1.82E-01	0*	0*	0*	0*	0*	1.82E-01	0*
Contribution to eutrophication, terrestrial	mol N eq	2.73E+00	0*	0*	0*	0*	0*	2.73E+00	0*
Contribution to photochemical ozone formation - human health	kg COVNM eq	5.83E-01	0*	0*	0*	0*	0*	5.83E-01	0*
Contribution to resource use, minerals and metals	kg Sb eq	2.03E-05	0*	0*	0*	0*	0*	2.03E-05	0*
Contribution to resource use, fossils	MJ	7.13E+03	0*	0*	0*	0*	0*	7.13E+03	0*
Contribution to water use	m3 eq	9.91E+00	0*	0*	0*	0*	0*	9.91E+00	0*

Inventory flows Indicators		Contactor TeSys Deca 115A 440V 3P AC3 100…250V AC-DC coil EverLink - LC1D115AKUE							
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.37E+03	0*	0*	0*	0*	0*	1.37E+03	0*
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of renewable primary energy resources	MJ	1.37E+03	0*	0*	0*	0*	0*	1.37E+03	0*
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	7.13E+03	0*	0*	0*	0*	0*	7.13E+03	0*
Contribution to use of non renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of non-renewable primary energy resources	MJ	7.13E+03	0*	0*	0*	0*	0*	7.13E+03	0*
Contribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to net use of freshwater	m³	2.31E-01	0*	0*	0*	0*	0*	2.31E-01	0*
Contribution to hazardous waste disposed	kg	5.23E+00	0*	0*	0*	0*	0*	5.23E+00	0*
Contribution to non hazardous waste disposed	kg	4.03E+01	0*	0*	0*	0*	0*	4.03E+01	0*
Contribution to radioactive waste disposed	kg	8.43E-03	0*	0*	0*	0*	0*	8.43E-03	0*
Contribution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.1, database version 2023-02 in compliance with ISO14044, EF 3.0 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2408027_V2	Drafting rules Supplemented by Information and reference documents	PCR-4-ed4-EN-2021 09 06 PSR-0005-ed3.1-EN-2023 12 08 www.pep-ecopassport.org
Date of issue	04-2025	Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016			
Internal	X	External	
<p>The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDmain)</p> <p>PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022</p> <p>The components of the present PEP may not be compared with components from any other program.</p> <p>Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"</p>			

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.se.com/contact>
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

ENVPEP2408027_V2

Published by Schneider Electric

©2024 - Schneider Electric – All rights reserved

04-2025