



Product Environmental Profile

SCHUKO SO WITH USB CHARGER TPB PW SYS M

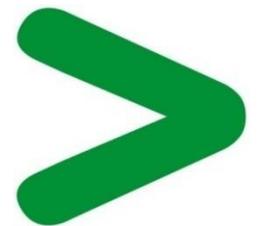

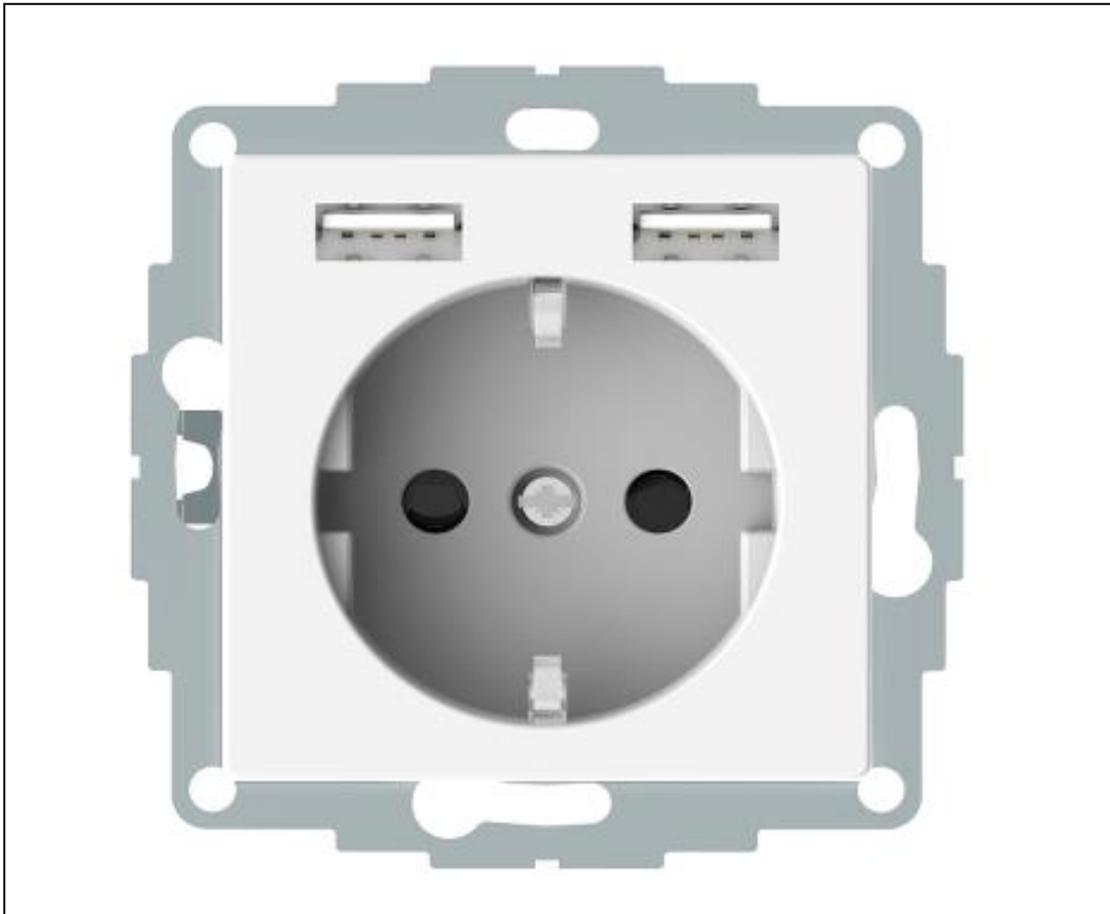


General information

Representative product	SCHUKO SO WITH USB CHARGER TPB PW SYS M - MEG2366-0319
Description of the product	Socket with USB charger to open or connect the electronic equipment into a circuit.
Functional unit	Connect/Disconnect during 20 years the plug of a load consuming 10A under a voltage of 250V while protecting the user from direct contact with live parts and with a protection class IP65 and IK08 Make available during 20 years a USB 2.0 connection.



Constituent materials

Reference product mass	132.99 g including the product, its packaging and additional elements and accessories
------------------------	---------------------------------------------------------------------------------------

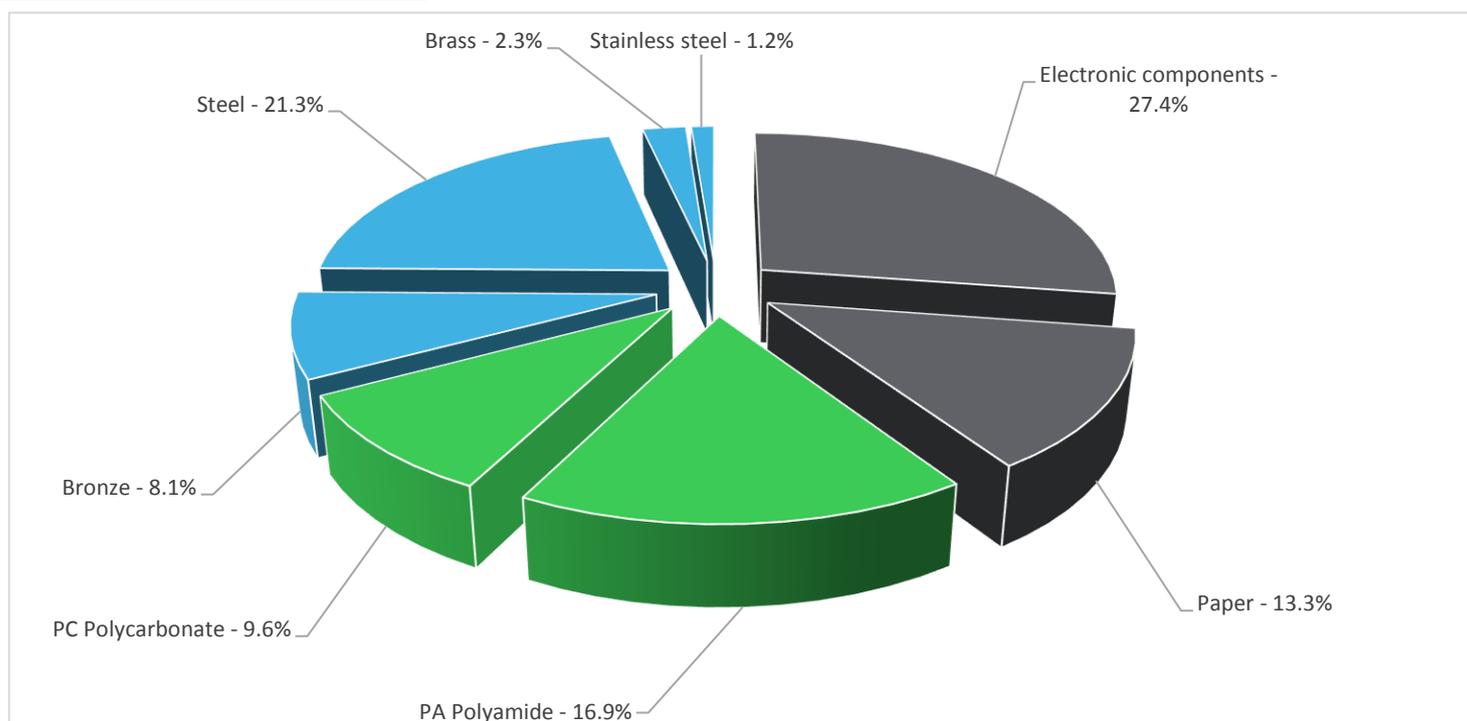

Plastics	26.5%
Metals	32.9%
Others	40.7%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The SCHUKO SO WITH USB CHARGER TPB PW SYS M presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 17.7 g, consisting of cardboard (100%)
Installation	This Product does not require any installation operations.
Use	The product does not require special maintenance operations.
End of life	<p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.</p> <p>Recyclability potential: 32% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p>



Environmental impacts

Reference life time	20 Years years			
Product category	Combination of functions			
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation			
Use scenario	<p>The product is made of power socket with USB. The energy consumption for power socket is in active mode 50% of the time with a power use of 0.04W and in off mode 50% of the time with a power use of 0W, the energy consumption for USB is in active mode 30% of the time with a power use of 0.086W and in stand by mode of 70% of the time with a power use of 0W</p> <p>So the combined energy consumption via calculated is in active mode 34% of the time with a power use of 0.21W and in off mode 66% of the time with a power use of 0W for 20 years.</p>			
Geographical representativeness	EUROPE			
Technological representativeness	Socket with USB charger to open or connect the electronic equipment into a circuit.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: FRANCE	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		SCHUKO SO WITH USB CHARGER TPB PW SYS M - MEG2366-0319					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.57E-04	1.57E-04	0*	0*	5.33E-07	0*
Contribution to the soil and water acidification	kg SO ₂ eq	2.75E-02	1.77E-03	7.83E-05	0*	2.56E-02	3.89E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	2.08E-03	4.56E-04	1.80E-05	4.72E-05	1.54E-03	1.27E-05
Contribution to global warming	kg CO ₂ eq	7.35E+00	1.15E+00	1.72E-02	2.43E-02	6.13E+00	2.93E-02
Contribution to ozone layer depletion	kg CFC11 eq	5.58E-07	1.58E-07	0*	6.05E-11	3.99E-07	1.23E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	1.68E-03	2.58E-04	5.59E-06	5.82E-06	1.40E-03	3.84E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	2.23E+01	9.34E-02	0*	0*	2.22E+01	0*
Total Primary Energy	MJ	1.38E+02	1.56E+01	2.43E-01	0*	1.22E+02	1.83E-01

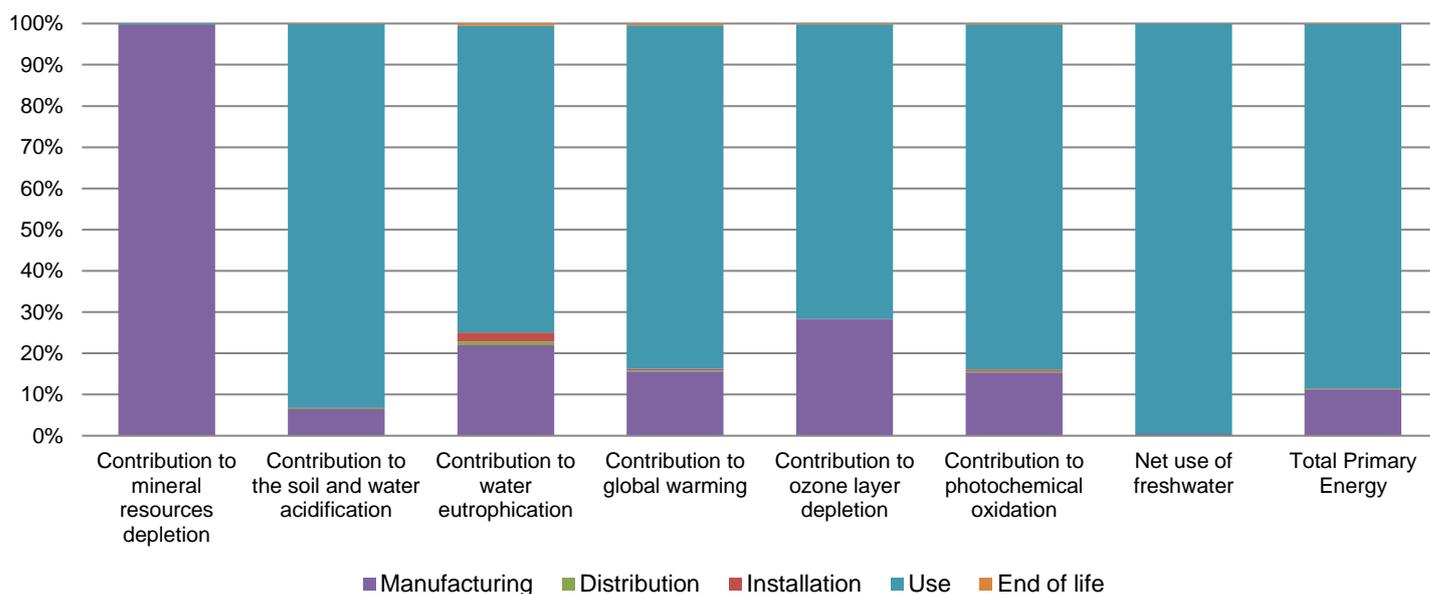

Optional indicators		SCHUKO SO WITH USB CHARGER TPB PW SYS M - MEG2366-0319					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	8.22E+01	1.22E+01	2.41E-01	0*	6.96E+01	1.69E-01
Contribution to air pollution	m ³	4.48E+02	1.82E+02	7.30E-01	8.23E-02	2.64E+02	1.32E+00
Contribution to water pollution	m ³	5.20E+02	2.61E+02	2.82E+00	1.31E+00	2.53E+02	1.86E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	4.68E-03	4.68E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.61E+01	5.55E-01	0*	0*	1.56E+01	0*
Total use of non-renewable primary energy resources	MJ	1.22E+02	1.51E+01	2.42E-01	0*	1.07E+02	1.83E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.58E+01	2.44E-01	0*	0*	1.56E+01	0*
Use of renewable primary energy resources used as raw material	MJ	3.11E-01	3.11E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.21E+02	1.36E+01	2.42E-01	0*	1.07E+02	1.83E-01
Use of non renewable primary energy resources used as raw material	MJ	1.49E+00	1.49E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*

Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	3.70E+00	3.50E+00	0*	0*	3.20E-03	2.01E-01
Non hazardous waste disposed	kg	2.32E+01	3.72E-01	0*	1.76E-02	2.29E+01	0*
Radioactive waste disposed	kg	1.62E-02	9.25E-04	0*	0*	1.53E-02	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	4.71E-02	8.00E-03	0*	0*	0*	3.91E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	6.04E-03	2.56E-04	0*	0*	0*	5.78E-03
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME vv5.7.0.2, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00308-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH25	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	03/2018	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
PEP are compliant with XP C08-100-1 :2014			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			



Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

SCHN-00308-V01.01-EN

© 2017 - Schneider Electric – All rights reserved

03/2018