

**DALI RM CDM 30 10A 1CH**

DALI-2 single channel relay

**Product description**

- \_ DALI-2 Relay
- \_ Compatible with DALI and DALI-2 versions
- \_ Compliant to IEC 62386-208
- \_ 1 channel actuator (switch) with DALI-2 input
- \_ Protected against DALI over voltage
- \_ Suitable for switchboard mount on standard DIN rail
- \_ Mains rated dry-contact (volt-free) potential free relay output
- \_ Compliant DALI device type 7
- \_ Small dimensions
- \_ 5 years guarantee (conditions at <https://www.tridonic.com/en/int/services/manufacturer-guarantee-conditions>)

**Interfaces**

- \_ DALI

**Functions**

- \_ Optimized for electronic loads with high in-rush currents like LED drivers, which have short but very high peaks of in-rush currents
- \_ Switching of loads with inrush currents up to 490 A / 1.5 ms
- \_ Compliant with common DALI-2 controllers and gateways
- \_ DALI backwards compatible

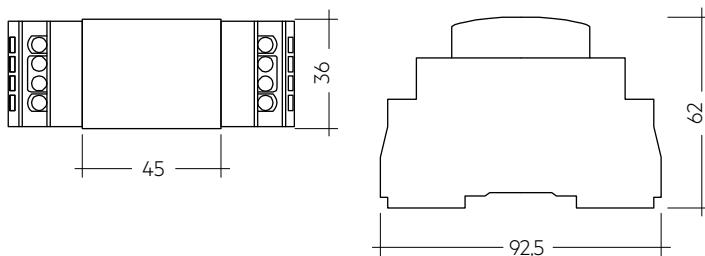
**Website**

<http://www.tridonic.com/28003311>



**DALI RM CDM 30 10A 1CH**

DALI-2 single channel relay

**Ordering data**

Type	Article number	Packaging, carton	Weight per pc.
DALI RM CDM 30 10A 1CH	28003311	40 pc(s).	0.088 kg

**Technical data**

Rated supply voltage	220 – 240 V
Mains frequency	50 / 60 Hz
Current consumption of DALI	2 mA
Input	DALI
Output	Potential free contact
Relay type	non-latching, normally open
Output load (resistive / inductive)	10 A / 6 A
In-rush current (peak / duration)	490 A / 1,500 µs
Relay switching cycles <sup>①</sup>	50,000
Ambient temperature ta	-20 ... +45 °C
Storage temperature ts	-20 ... +65 °C
Humidity	20 ... 90 % (non-condensing)
Starting time	≤ 0.3 s
Type of protection	IP20
Protection class	Protection class II
Mounting	DIN rail mounting, 35 mm
Housing material	Polycarbonate
Housing colour	White (RAL 9003)
Guarantee (conditions at <a href="http://www.tridonic.com">www.tridonic.com</a> )	5 Year(s)
Dimensions L x W x H	92.5 x 36 x 62 mm

**Approval marks****Standards**

EN 55015, EN 60669-2-1, EN 61000-3-2, EN 61000-3-3, EN 62386-208, EN 62386-101, EN 62386-102

<sup>①</sup> Max. switch cycles per hour are 360. One cycle is either close or open.

## 1. Standards

EN 55015  
EN 60669-2-1  
EN 61000-3-2  
EN 61000-3-3  
EN 62386-208  
EN 62386-101 Ed.2  
EN 62386-102 Ed.2

### 1.2 Glow wire test

according to EN 61347-2-11 passed for temperatures up to 750°C.

## 2. Common

- Loads that do not have a DALI input can be integrated in the DALI circuit.  
The loads can be switched on and off via DALI.

## 3. Installation

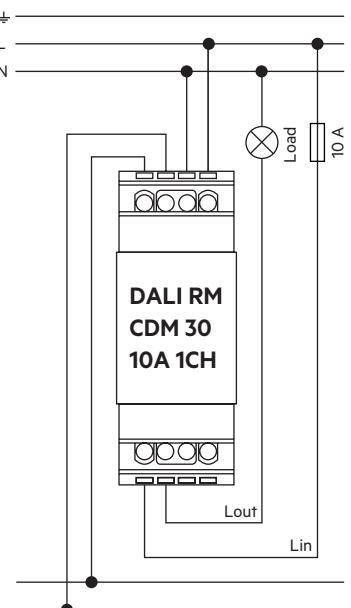
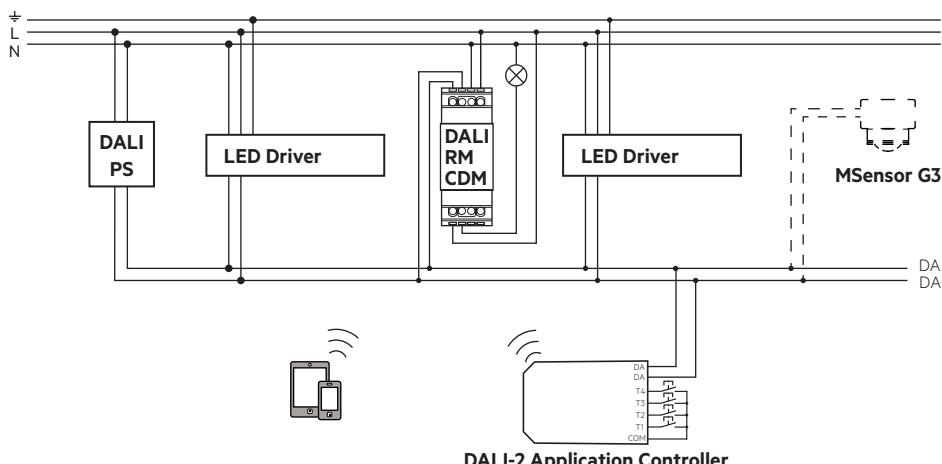
### 3.1 Safety instructions

- Do not connect the device to DC (direct current) voltage, as this will damage the device.
- Do not create a short circuit on the secondary side, as this will damage the device.  
It is recommended to connect the device with a residual current circuit breaker (RCD) or a circuit breaker with a rated value not higher than 10 A to the secondary side to protect the device in case of a short circuit.
- Installation of this device may only be carried out by specialist staff who have provided proof of their skills.
- The power supply must be switched off before handling the device.
- The relevant safety and accident prevention regulations must be observed.
- DALI signals are not SELV. Therefore the same procedures should be applied as working with mains voltage.

### 3.2 Area of application

The device may only:

- be used for the applications specified,
- for safe installation in dry, clean environment and
- be installed in such a way that access is only possible using a tool.

**3.3 Connection diagrams****3.4 Installation**

Mount the DALI relay on DIN rail inside a mains rated enclosure as shown in fig. 1.

To remove from DIN rail, release the clip mechanism with a flat blade screw driver, as per fig. 2.

Fig. 1


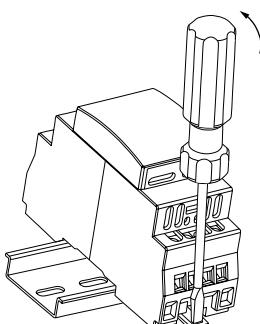



Fig. 2

**3.5 Wiring type and cross section**

The wiring can be solid wire or stranded wire with end sleeve with a cross-section of 1 to 4 mm<sup>2</sup>.

wire preparation:

1 – 4 mm<sup>2</sup>

**3.6 Note for Application Controller**

Device is developed according DALI Standard EN 62386-208 and is DALI device Type 7, control gear – Switching function.

**4. Miscellaneous****4.1 Disposal of equipment**

Return old devices in accordance with the WEEE directive to suitable recycling facilities.

**4.2 Additional information**

Additional technical information at [www.tridonic.com](http://www.tridonic.com) → Technical Data

Lifetime declarations are informative and represent no warranty claim. No warranty if device was opened.