
RT/U30.0.1-825



PRODUCT-DETAILS

## RT/U30.0.1-825 RT/U30.0.1-825 RoomTouch 5 -825

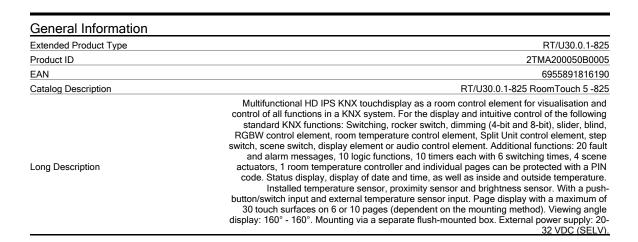

Installation	
Instructions and Manuals	2TMU190000M0049
Mounting Type	Flush Mounted
Mounting Height	Optimum 1.5 MTR m

RT/U30.0.1-825 2/3

Technical	
Data Sheet, Technical	No document needed
Information  Compatible Bus Systems	KNX (TP)
Product Range	KNX
Trouble runge	MV2
Electrical	
Auxiliary Voltage AC/DC	20 V AC/DC 32 V AC/DC
Donign	
Design RAL Number	Similar to RAL 9005
Color	glass black
Material Compliance	
RoHS Information	9AKK107680A8249
RoHS Status	Following EU Directive 2011/65/EU
REACH Declaration	2CKA309999E9999
REACH Information	False - does not contains substances > 0.1 mass percentage
Conflict Minerals Reporting Template (CMRT)	9AKK108468A3363
Dimensions	
Product Net Weight	366 g
Screen Size	5 in
Certificates and Declarations	
Declaration of Conformity - CE	9AKK107680A8247
Classifications	
ETIM 9	EC001585 - Multi operating device for bus system
eClass	V11.0 : 27143101
UNSPSC	39121801
WEEE Category	5. Small Equipment (No External Dimension More Than 50 cm)
WEEE B2C / B2B	Business To Consumer

## Accessories

RT/U30.0.1-825 3/3

Identifier	Description	Туре	Quantity	Unit Of Measure
2CKA006300A1611	Visualisation, Display and Signalling	TZW/U.0.1.CK	1	piece
2CKA006220A0721	DP4-T-1 Temperature Sensor	DP4-T-1	1	piece
2CDG120037R0011	CP-D24/2.5 priOn Power Supply, 24 V DC, 2.5 A, MDRC	CP-D24/2.5	1	piece
2TMA200160B0003	BOX/U5.1 Mounting box 5Inch FM	BOX/U5.1	1	piece

## Categories

Low Voltage Products and Systems → Building and Home Automation Solutions → KNX → Visualisation, Display and Signalling → Touch Panels









3605