




PRODUCT-DETAILS

AF146-30-11B-31

AF146-30-11B-31 Contactor

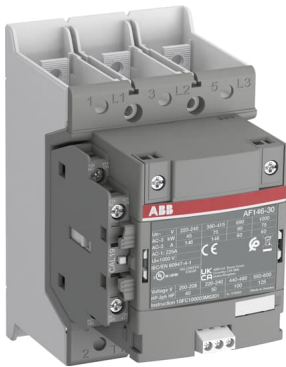

General Information	
Extended Product Type	AF146-30-11B-31
Product ID	1SFL467002R3111
EAN	7320500561607
Catalog Description	AF146-30-11B-31 Contactor
Long Description	The AF146-30-11B-31 is a 3 pole - 1000 V IEC or 600 V UL contactor with Main Circuit Bars, controlling motors up to 75 kW / 400 V AC (AC-3) or 100 hp / 480 V UL and switching power circuits up to 225 A (AC-1) or 200 A UL general use. Thanks to the AF technology, the contactor has a wide control voltage range (24-60 V 50/60 Hz and 20-60 V DC), managing large control voltage variations, reducing panel energy consumptions and ensuring distinct operations in unstable networks. Furthermore, surge protection is built-in, offering a compact solution. AF contactors have a block type design, can be easily extended with add-on auxiliary contact blocks and an additional wide range of accessories.

Ordering	
Minimum Order Quantity	1 piece
Customs Tariff Number	8536490099

Popular Downloads	
Instructions and Manuals	1SFC100003M0201
CAD Dimensional Drawing	2CDC001079B0201

Dimensions	
Product Net Width	90 mm
Product Net Depth / Length	138.5 mm
Product Net Height	150 mm
Product Net Weight	1.3 kg

Technical	
Number of Main Contacts NO	3
Number of Main Contacts NC	0
Number of Auxiliary Contacts NO	1
Number of Auxiliary Contacts NC	1
Rated Operational Voltage	Main Circuit 1000 V
Rated Frequency (f)	Main Circuit 50 / 60 Hz
Conventional Free-air Thermal Current (I _{th})	acc. to IEC 60947-4-1, Open Contactors Θ = 40 °C 225 A
Rated Operational Current AC-1 (I _e)	(1000 V) 40 °C 225 A (1000 V) 60 °C 200 A (1000 V) 70 °C 175 A (690 V) 40 °C 225 A (690 V) 60 °C 200 A (690 V) 70 °C 175 A
Rated Operational Current AC-3 (I _e)	(415 V) 60 °C 146 A (440 V) 60 °C 146 A (500 V) 60 °C 130 A (690 V) 60 °C 93 A (1000 V) 60 °C 60 A (380 / 400 V) 60 °C 146 A (220 / 230 / 240 V) 60 °C 146 A
Rated Operational Current AC-3e (I _e)	(415 V) 60 °C 146 A (440 V) 60 °C 146 A (500 V) 60 °C 130 A (690 V) 60 °C 93 A (1000 V) 60 °C 54 A (380 / 400 V) 60 °C 146 A (220 / 230 / 240 V) 60 °C 146 A
Rated Operational Power AC-3 (P _e)	(415 V) 75 kW (440 V) 90 kW (500 V) 90 kW (690 V) 90 kW (380 / 400 V) 75 kW (220 / 230 / 240 V) 45 kW
Rated Operational Power AC-3e (P _e)	(415 V) 75 kW (440 V) 90 kW (500 V) 90 kW (690 V) 90 kW (1000 V) 75 kW (380 / 400 V) 75 kW

	(220 / 230 / 240 V) 45 kW
Rated Breaking Capacity AC-3	8 x I _e AC-3
Rated Breaking Capacity AC-3e	8.5 x I _e AC-3e
Rated Making Capacity AC-3	10 x I _e AC-3
Rated Making Capacity AC-3e	12 x I _e AC-3e
Rated Short-time Withstand Current Low Voltage (I _{cw})	at 40 °C Ambient Temp, in Free Air, from a Cold State 10 s 1168 A at 40 °C Ambient Temp, in Free Air, from a Cold State 15 min 225 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 min 477 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 s 1460 A at 40 °C Ambient Temp, in Free Air, from a Cold State 30 s 674 A
Maximum Breaking Capacity	cos phi=0.45 (cos phi=0.35 for I _e > 100 A) at 440 V 3000 A cos phi=0.45 (cos phi=0.35 for I _e > 100 A) at 690 V 1500 A
Maximum Electrical Switching Frequency	(AC-1) 300 cycles per hour (AC-2 / AC-4) 150 cycles per hour (AC-3) 300 cycles per hour
Rated Insulation Voltage (U _i)	acc. to IEC 60947-4-1 and VDE 0110 (Gr. C) 1000 V acc. to UL/CSA 1000 V
Rated Impulse Withstand Voltage (U _{imp})	Main Circuit 8 kV
Mechanical Durability	5 million
Maximum Mechanical Switching Frequency	300 cycles per hour
Coil Operating Limits	(acc. to IEC 60947-4-1) 0.85 x U _c Min. ... 1.1 x U _c Max. (at θ ≤ 70 °C)
Rated Control Circuit Voltage (U _c)	50 Hz 24 ... 60 V 60 Hz 24...60 V DC Operation 20...60 V
Coil Consumption	Holding at Max. Rated Control Circuit Voltage 50 Hz 5.5 V·A Holding at Max. Rated Control Circuit Voltage 50 Hz 2.5 W Holding at Max. Rated Control Circuit Voltage 60 Hz 5.5 V·A Holding at Max. Rated Control Circuit Voltage 60 Hz 2.5 W Holding at Max. Rated Control Circuit Voltage DC 2.5 W Pull-in at Max. Rated Control Circuit Voltage 50 Hz 225 V·A Pull-in at Max. Rated Control Circuit Voltage 60 Hz 225 V·A Pull-in at Max. Rated Control Circuit Voltage DC 210 W
Operate Time	Between Coil De-energization and NO Contact Opening 40 ... 70 ms Between Coil Energization and NO Contact Closing 20 ... 55 ms
Connecting Capacity Main Circuit	Flexible 2 x 10 ... 70 mm ² Rigid Cu-Cable 1 x 10 ... 95 mm ²
Connecting Capacity Auxiliary Circuit	Flexible with Ferrule 1x 0.75 ... 2.5 mm ² Flexible with Ferrule 2x 0.75 ... 2.5 mm ² Flexible with Insulated Ferrule 1x 0.75 ... 2.5 mm ² Flexible with Insulated Ferrule 2x 0.75 ... 2.5 mm ² Flexible 1x 0.75 ... 2.5 mm ² Flexible 2x 0.75 ... 2.5 mm ² Solid 1x 1 ... 4 mm ² Solid 2x 1 ... 4 mm ² Stranded 1x 1 ... 4 mm ² Stranded 2x 1 ... 4 mm ²
Wire Stripping Length	Auxiliary Circuit 9 mm Control Circuit 9 mm
Degree of Protection	acc. to IEC 60529, IEC 60947-1, EN 60529 Coil Terminals IP20 acc. to IEC 60529, IEC 60947-1, EN 60529 Main Terminals IP00
Terminal Type	Main Circuit: Bars

Technical UL/CSA

Maximum Operating Voltage UL/CSA	Main Circuit 1000 V
----------------------------------	---------------------

General Use Rating UL/CSA	(600 V AC) 200 A
Horsepower Rating UL/CSA	(200 ... 208 V AC) Three Phase 40 hp (220 ... 240 V AC) Three Phase 50 hp (440 ... 480 V AC) Three Phase 100 hp (550 ... 600 V AC) Three Phase 125 hp
Tightening Torque UL/CSA	Auxiliary Circuit 9 in-lb Control Circuit 9 in-lb Main Circuit 71 in-lb

Environmental

Ambient Air Temperature	Close to Contactor Fitted with Thermal O/L Relay (0.85 ... 1.1 Uc) -25 ... 55 °C Close to Contactor without Thermal O/L Relay (0.85 ... 1.1 Uc) -40 ... 70 °C Close to Contactor for Storage -40 ... 70 °C
Maximum Operating Altitude Permissible	Without Derating 3000 m

Material Compliance

Conflict Minerals Reporting Template (CMRT)	9AKK108467A5658
REACH Declaration	2CMT2021-006202
RoHS Information	2CMT2021-006277
RoHS Status	Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019
Toxic Substances Control Act - TSCA	2CMT2023-006525
WEEE B2C / B2B	Business To Business
WEEE Category	5. Small Equipment (No External Dimension More Than 50 cm)

Circular Value

ABB EcoSolutions	Yes
Circular Design Principles Recyclability Rate	Design for Closing Resource Loops - Standard EN45555 - 87.8 %
End of Life Instructions	1SFC100112M0001
Group Waste to Landfill Target	Non-hazardous waste is sent to a landfill, where there is no alternative option available within 100km of a facility
Improved Resource Efficiency for Customers	Product Efficiency - Product requires less energy to operate compared to similar product on market or older products from the same line
Sustainable Material Content	Recycled Metal - 37 %

Eco Transparency

Environmental Product Declaration - EPD	1SFC100092D0201
--	-----------------

Certificates and Declarations

Declaration of Conformity - CE	2CMT2015-005439
Declaration of	2CMT2020-006118

Conformity - UKCA	
UL Certificate	20120925-E36588

Container Information

Package Level 1 Units	box 1 piece
Package Level 1 Width	207 mm
Package Level 1 Depth / Length	216 mm
Package Level 1 Height	150 mm
Package Level 1 Gross Weight	1.5 kg
Package Level 1 EAN	7320500561607

Classifications

Object Classification Code	Q
ETIM 7	EC000066 - Power contactor, AC switching
ETIM 8	EC000066 - Power contactor, AC switching
eClass	V11.0 : 27371003
UNSPSC	39121529
IDEA Granular Category Code (IGCC)	4758 >> lec Contactors

Categories

Low Voltage Products and Systems → Control Products → Contactors → Block Contactors → AF Contactors → AF146

