
TY272MX 1/3



PRODUCT-DETAILS

TY272MX

CBL TIE 120LB 9IN UV BLK NYLON

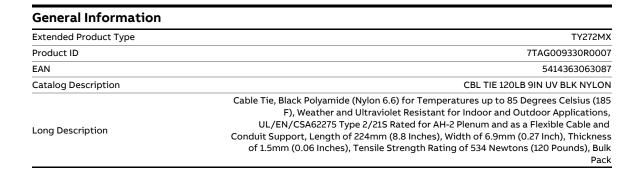

Ordering	
EAN	5414363063087
UPC	786210850726
Country of Origin	United States (US)
Selling Unit of Measure	each

TY272MX 2/3

Dimensions	
Product Net Width	0.275 in
	6.99 mm
Product Net Depth /	8.75 in
Length	222.3 mm

Container Information	
Package Level 1 Units	500 EA
Package Level 1 Width	0 mm 0 in
Package Level 1 Height	0 mm 0 in
Package Level 1 Depth / Length	0 mm 0 in
Package Level 2 Units	5000 EA
Package Level 2 Width	345.44 mm 13.6 in
Package Level 2 Height	241.3 mm 9.5 in
Package Level 2 Depth / Length	543.56 mm 21.4 in
Package Level 3 Units	175000 EA
Package Level 3 Width	0.025 mm 0.001 in
Package Level 3 Height	0.025 mm 0.001 in
Package Level 3 Depth / Length	0.025 mm 0.001 in

Technical UL/CSA	
Flammability According	V-2
to UL94	

Brand / Label	Ty-Rap
Bundle Diameter	0.236 to 1.97 in
	6 to 50 mm
Color	Black
Effective Date	19750325
Lock Type	Stainless Steel Barb
Material	Nylon/Polyamide 6.6
Product Name	Other
Product Type	High Performance
Special Functions	Low profile head is designed to prevent snags on uneven surfaces and easier to pull through bulkheads. Non-magnetic stainless steel locking device insures both maximum strength and the right tightness every time.
Standards	UL E49405
Tensile Strength	120 lb 530 N
Thickness	0.07 in 1.78 mm

TY272MX 3/3

Certificates and Declarations		
Data Sheet, Technical Information	TDS000487	
Declaration of	9AKK107492A9841	
Conformity - CE		

Classifications	
ETIM 6	EC000046 - Cable tie
ETIM 7	EC000046 - Cable tie
ETIM 8	EC000046 - Cable tie
UNSPSC	39121703
WEEE Category	Product Not in WEEE Scope
IDEA Granular Category Code (IGCC)	5034 >> Cable ties

Categories

 $Low\ Voltage\ Products\ and\ Systems \rightarrow Installation\ Products \rightarrow Wire\ Management\ and\ Connectivity \rightarrow Cable\ Ties$