
TY5275MX 1/3



PRODUCT-DETAILS

TY5275MX

CABLE TIE 18IN 120LB UV BLACK

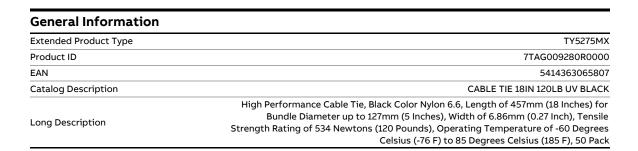

dering	
EAN	5414363065807
UPC	786210870854
Country of Origin	United States (US)
Selling Unit of Measure	each

Dimensions

TY5275MX 2/3

Product Net Width	0.27 in 6.9 mm
Product Net Depth /	18 in
Length	457 mm

Container Information	
Package Level 1 Units	50 EA
Package Level 1 Width	0 mm 0 in
Package Level 1 Height	0 mm 0 in
Package Level 1 Depth / Length	0 mm 0 in
Package Level 2 Units	500 EA
Package Level 2 Width	234.95 mm 9.25 in
Package Level 2 Height	196.85 mm 7.75 in
Package Level 2 Depth / Length	565.15 mm 22.25 in
Package Level 3 Units	24000 EA
Package Level 3 Width	0 mm 0 in
Package Level 3 Height	0 mm 0 in
Package Level 3 Depth / Length	0 mm 0 in

Environmental

RoHS Status Fol	owing EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019
-----------------	--

Technical UL/CSA

Flammability According V-2 to UL94

Additional Information

Brand / Label	Ty-Rap
Bundle Diameter	Max 5 in
	Max 127 mm
Color	Black
Effective Date	19900615
Lock Type	Stainless Steel Barb
Material	Nylon/Polyamide 6.6
Product Name	Other /note: See 9903.88.66 and 9903.88.67.
Product Type	High Performance
Special Functions	Low profile head is designed to prevent snags on uneven surfaces and
	easier to pull through bulkheads. Non-magnetic stainless steel locking
	device insures both maximum strength and the right tightness every time.
Standards	UL E49405
Tensile Strength	120 lb
	534 N

TY5275MX 3/3

Thickness 0.06 in 1.5 mm

Certificates and Declarations	
Data Sheet, Technical Information	TDS000487
Declaration of Conformity - CE	9AKK107492A9841

Classifications	
ETIM 6	EC000046 - Cable tie
ETIM 7	EC000046 - Cable tie
ETIM 8	EC000046 - Cable tie
UNSPSC	39121703
WEEE Category	Product Not in WEEE Scope
IDEA Granular Category Code (IGCC)	5034 >> Cable ties

Categories

 $Low\ Voltage\ Products\ and\ Systems \rightarrow Installation\ Products \rightarrow Wire\ Management\ and\ Connectivity \rightarrow Cable\ Ties$