
TY529MX 1/3



PRODUCT-DETAILS

TY529MX

CBL TIE 120LB 30IN UV BLACK NYLON

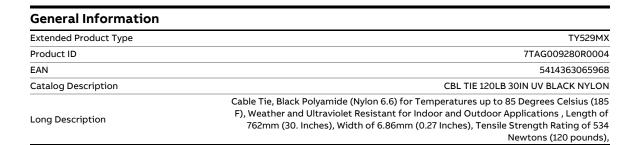

rdering	
E-Number (Finland)	1381527
EAN	5414363065968
UPC	786210838908
Country of Origin	United States (US)
Selling Unit of Measure	each

TY529MX 2/3

Dimensions	
Product Net Width	0.273 in
	6.93 mm
Product Net Depth /	30.34 in
Length	770.61 mm

Container Information	
Package Level 1 Units	50 EA
Package Level 1 Width	152.4 mm 6 in
Package Level 1 Height	0 mm 0 in
Package Level 1 Depth / Length	914.4 mm 36 in
Package Level 2 Units	500 EA
Package Level 2 Width	158.75 mm 6.25 in
Package Level 2 Height	120.65 mm 4.75 in
Package Level 2 Depth / Length	869.95 mm 34.25 in
Package Level 3 Units	24500 EA
Package Level 3 Width	0 mm 0 in
Package Level 3 Height	0 mm 0 in
Package Level 3 Depth / Length	0 mm 0 in

Technical UL/CSA	
Flammability According	V-2
to UL94	

Additional Information	
Brand / Label	Ty-Rap
Bundle Diameter	0.236 to 9.01 in 6 to 229 mm
Color	Black
Effective Date	19701204
Lock Type	Stainless Steel Barb
Material	Nylon/Polyamide 6.6
Product Name	Other
Product Type	High Performance
Special Functions	Low profile head is designed to prevent snags on uneven surfaces and easier to pull through bulkheads. Non-magnetic stainless steel locking device insures both maximum strength and the right tightness every time.
Tensile Strength	120 lb 530 N
Thickness	0.06 in 1.52 mm

TY529MX 3/3

Certificates and Declarations	
Data Sheet, Technical Information	TY529MX
Declaration of	9AKK107492A9841
Conformity - CE	

Classifications	
ETIM 6	EC000046 - Cable tie
ETIM 7	EC000046 - Cable tie
ETIM 8	EC000046 - Cable tie
UNSPSC	39121703
WEEE Category	Product Not in WEEE Scope
IDEA Granular Category Code (IGCC)	5034 >> Cable ties

Categories

 $Low\ Voltage\ Products\ and\ Systems \rightarrow Installation\ Products \rightarrow Wire\ Management\ and\ Connectivity \rightarrow Cable\ Ties$