
TYB2315MX 1/3



PRODUCT-DETAILS

TYB2315MX

CABLE TIE 18LB 7IN UV BLACK NYLON

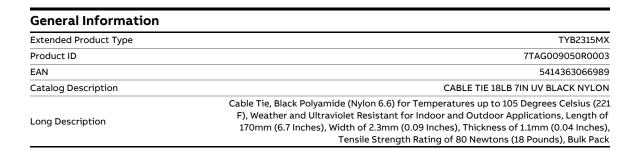

dering	
EAN	5414363066989
UPC	786210885063
Country of Origin	United States (US)
Selling Unit of Measure	each

Dimensions

TYB2315MX 2/3

Product Net Width	0.09 in
	2.3 mm
Product Net Depth /	6.7 in
Length	170 mm

Container Information	
Package Level 1 Units	1000 EA
Package Level 1 Width	304.8 mm 12 in
Package Level 1 Height	0 mm 0 in
Package Level 1 Depth / Length	381 mm 15 in
Package Level 2 Units	10000 EA
Package Level 2 Width	284.48 mm 11.2 in
Package Level 2 Height	274.32 mm 10.8 in
Package Level 2 Depth / Length	342.9 mm 13.5 in
Package Level 3 Units	440000 EA
Package Level 3 Width	0.025 mm 0.001 in
Package Level 3 Height	0.025 mm 0.001 in
Package Level 3 Depth / Length	0.025 mm 0.001 in

Environmental

RoHS Status Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019

Technical UL/CSA

Flammability According V-2 to UL94

Brand / Label	Ty-Rap
Bundle Diameter	0.06 to 1.26 in
	1.5 to 32 mm
Color	Black
Effective Date	19760908
Lock Type	Stainless Steel Barb
Material	Nylon/Polyamide 6.6
Product Name	Other /note: See 9903.88.66 and 9903.88. 67.
Product Type	High Performance
Special Functions	Low profile head is designed to prevent snags on uneven surfaces and
	easier to pull through bulkheads. Non-magnetic stainless steel locking
	device insures both maximum strength and the right tightness every time.
Standards	UL E49405
Tensile Strength	18 lb
	80 N

TYB2315MX 3/3

Thickness 0.04 in 1 mm

Certificates and Declarations	
Data Sheet, Technical Information	TDS000570
Declaration of Conformity - CE	9AKK107492A9841

Classifications	
ETIM 6	EC000046 - Cable tie
ETIM 7	EC000046 - Cable tie
ETIM 8	EC000046 - Cable tie
UNSPSC	39121703
WEEE Category	Product Not in WEEE Scope
IDEA Granular Category Code (IGCC)	5034 >> Cable ties

Categories

 $Low\ Voltage\ Products\ and\ Systems \rightarrow Installation\ Products \rightarrow Wire\ Management\ and\ Connectivity \rightarrow Cable\ Ties$

