




PRODUCT-DETAILS

N2128 PL

Socket outlet NEMA 5-15R Without imprint  
NEMA Silver - Zenit

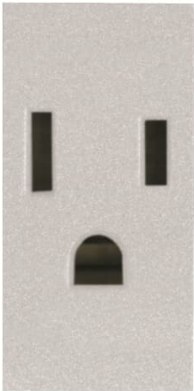

| General Information   |   |
|-----------------------|---|
| Extended Product Type | N2128 PL  |
| Product ID            | 2CLA212800N1301   |
| EAN                   | 8427238077529   |
| Catalog Description   | Socket outlet NEMA 5-15R Without imprint NEMA Silver - Zenit  |
| Long Description      | Color: Silver.<br>Rated voltage: 125 Vac<br>Rated current: 15A<br>Type B: 2P + E / NEMA 5-15R<br>Shuttered for child safety<br>Screw terminals<br>Size: 1 module. |

| Installation             |                  |
|--------------------------|------------------|
| Instructions and Manuals | 2CLX210109N1001  |
| Mounting Type            | Flush Mounted    |
| Type of Fastening        | Snapper Mounting |

| Technical                         |  |       |
|-----------------------------------|--|-------|
| Data Sheet, Technical Information | 9AKK10103A5108                                       |       |
| Number of Phases                  |  | 2     |
| Number of Active Pin Terminals    |  | 0     |
| Number of Gangs                   |  | 1     |
| Connection Type                   |  | Screw |
| Socket Outlet Type                | Power Socket Outlets - US Grounded acc. to NEMA 5-15 |       |
| Number of Batteries               |  | 0     |

| Electrical                      |  |            |
|---------------------------------|--|------------|
| Rated Voltage (U <sub>r</sub> ) |  | 250 V      |
| Rated Current (I <sub>n</sub> ) |  | 15 A       |
| Frequency (f)                   |  | 50...60 Hz |

| Design               |  |                       |
|----------------------|--|-----------------------|
| Design Range         |  | Zenit                 |
| Surface Finishing    |  | Decor Matt            |
| Material             |  | Plastic Thermoplastic |
| Label Space Provided |  | No                    |
| Legend               |  | Without imprint       |
| Color                |  | Silver                |

| Material Compliance                         |                 |  |
|---|-----------------|--|
| Conflict Minerals Reporting Template (CMRT) | 9AKK108468A3363 |  |

| Environmental           |  |      |
|-------------------------|--|------|
| Ambient Air Temperature | Operation -5 ... +35 °C<br>Storage -5 ... +50 °C |      |
| Degree of Protection    |  | IP20 |

| Dimensions         |  |          |
|--------------------|--|----------|
| Product Net Width  |  | 22 mm    |
| Product Net Height |  | 44 mm    |
| Product Net Weight |  | 0.026 kg |

| Ordering                  |                                    |  |
|---------------------------|------------------------------------|--|
| Replaced Product ID (OLD) | 2CLA212800N1302<br>2CLA212800N1303 |  |

Certificates and Declarations

|                                   |                 |
|-----------------------------------|-----------------|
| Declaration of<br>Conformity - CE | 9AKK107046A9871 |
|-----------------------------------|-----------------|

Classifications

|                |  |
|----------------|--|
| ETIM 9         | EC000125 - Socket outlet                                   |
| WEEE Category  | 5. Small Equipment (No External Dimension More Than 50 cm) |
| WEEE B2C / B2B | Business To Consumer                                       |

Categories

Low Voltage Products and Systems → Wiring Accessories - Light Switch Ranges → Cover Plates and Control Elements → Socket Outlets

