


LGP Heavy flexible conduits

Item codes : from 666422 to 666429

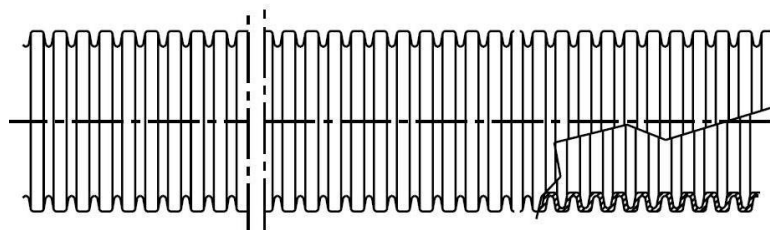

SUMMARY

PAGES


- 1. Description and applications 1
- 2. Dimensions and compatibility 1
- 3. Technical features 1
- 4. Environmental profile 2
- 5. Conformity and approvals 2

1. DESCRIPTION AND APPLICATIONS

Flexible corrugated heavy conduit made of high quality, halogen free and flame retardant polyamide. Suitable for heavy requirements it combines high mechanical and thermal performances with a good flexibility. Ideal for static or dynamic applications it ensures the protection of cable and guarantees a good resistance to simulated weathering and vibrations. It's the appropriate solution for energy, signal or power distribution and ensures a good tightening and an IP68 protection used with the patented connectors.

2. DIMENSIONS AND COMPATIBILITY

Dimensions and packaging:

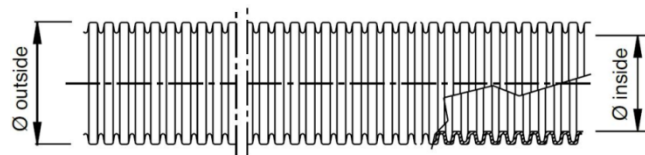

Item GREY	Nominal diameter	Internal diameter [mm]	External diameter [mm]	Curvature radius* [mm]	Pack [m]
666422	7	7,0	10,0	50	50
666423	8	8,0	12,0	55	50
666424	12	12,0	16,0	70	50
666425	15	15,0	20,0	85	50
666426	19	19,0	25,0	120	50
666427	25	25,0	32,0	150	25
666428	33	33,0	40,0	190	25
666429	42	42,0	50,0	240	25

* Approximate value: for more information contact Legrand technical offices

Compatibility:

Connectors, fittings and accessories LGP series.



3. TECHNICAL FEATURES

Raw material:

Polyamide PA6.6 [UL94-V2] halogen free and flame retardant.

IEC 61386 classification:


3	4	4	3
---	---	---	---

(3 1 4 3 for item 666422 and 3 2 4 3 for item 666423)

1 st figure	2 nd figure	3 rd figure	4 th figure
Resistance to compression	Resistance to shock	Maximum installation and normal use temperature	Minimum transport, installation and normal use temperature
1 = very slight 125 N	1 = very slight 0,5 J	1 = +5 °C	1 = +60 °C
2 = slight 320 N	2 = slight 1 J	2 = -5 °C	2 = +90 °C
3 = medium 750 N	3 = medium 2 J	3 = -15 °C	3 = +105 °C
4 = strong 1250 N	4 = strong 6 J	4 = -25 °C	4 = +120 °C
5 = very strong 4000 N	5 = very strong 20 J	5 = -45 °C	5 = +150 °C
			6 = +250 °C
			7 = +400 °C

Resistance to UV rays:

Represents the resistance to the degradation of mechanical performance caused by exposure to UV radiation contained in sunlight. All RTA conduit systems have been subjected to the Q.U.V. test which, with exposure cycles of 4+4 hours, simulates the continued alternation of light and condensation. The conduits of LGP series are not recommended for long exposition to UV radiation even if they have a good resistance to UV rays: all LGP conduits are indicated for internal uses or covered uses.

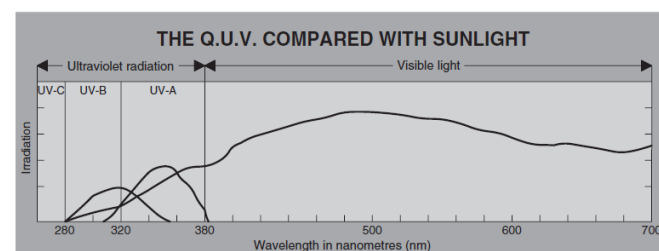

Resistance to chemical agents:

Represents the resistance to chemicals or external agents. The used test method consist of: immersion of the items under test in the chemical substance for 24 hours; once they were dried and conditioned at a constant temperature for other 24 hours, they were checked with the following examinations:

- Visual inspection to check the integrity
- Mechanical bending test
- Mechanical compression test
- IP protection test

Industrial chemical agents	Resistance*
Unleaded petrol	●
Industrial detergent	●
Diesel fuel	●
Lubricant oil	●
Emulsifier solution	●
Washing solvent	●

* resistances to chemicals are indicative. For any specific application or environment please contact Legrand technical offices

- Good resistance
- Medium resistance
- No resistance

Operating temperature:

Minimum: -25° C / -13° F

Maximum: +105° C / +221° F

Heat resistance:

Glow wire test: 750° C / 1382° F

Self-extinguishing:

Does not propagate flames in according to IEC 61386.

IP protection index:

IP65 with LGP series connectors.

IP68 with LGP series connectors and gaskets

1 st digit IP	
Protection against the ingress of solid bodies	
0	No protection
1	Protection against solid bodies larger than 50 mm (e.g.: accidental contact)
2	Protection against solid bodies larger than 12 mm (e.g.: finger)
3	Protection against solid bodies larger than 2.5 mm
4	Protection against solid bodies larger than 1 mm
5	Protection against dust
6	Complete protection against dust

2 nd digit IP	
Protection against the ingress of liquids	
2	Protection against drops of water falling at up to 15° from the vertical
3	Protection against drops of rain water at up to 60° from the vertical
4	Protection against sprays of water from all directions
5	Protection against jets of water from all directions
6	Protection against jets of water of similar force to heavy seas
7	Protection against the effects of immersion
8	Protection against prolonged effects of immersion under pressure

4. ENVIRONMENTAL PROFILE

All the items identified in this technical sheet respect in terms of concentration of substances and raw materials the European legislations about dangerous and forbidden substances and chemical preparations.



All items identified in this technical sheet are constituted by raw materials completely recyclable.

5. CONFORMITY AND APPROVALS

All the items identified in this technical sheet are compliant to all the requirements and the regulations currently in force in the European Union about safety, health and environmental issues.



UL Recognized mark: items from 666424 to 666429.



LAPI homologation: items from 666422 to 666429.

For technical documentation, test reports, commercial information or any other needs please refer to the local LEGRAND office.