


Step marker lamp

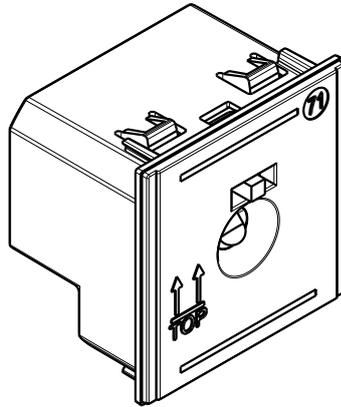

Use

Step marker lamps with white light LEDs - on-off switch
- 2 modules

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 1,5 mm² max
Stripping length: 8 mm
Screwdriver: flat 3
Compatible with flexible or rigid cables

Range

Designation	Cat. No.	Related Cover Codes
Step marker lamps 127/230 V~	K4382	<input type="checkbox"/> KW71 <input type="checkbox"/> KM71 <input type="checkbox"/> KG71
Step marker lamps 12/24 V~	K4382V12V24	<input type="checkbox"/> KW71 <input type="checkbox"/> KM71 <input type="checkbox"/> KG71

Technical characteristics

- Protection index

(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP20

- Mechanical characteristics

Impact test: IK 04

- Material characteristics

Material:
Case and Key cover: PC (Polycarbonate)


UV resistant.

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place
650° C / 30 s for other parts made of insulating materials

Colours code: White Sand Black

Overall dimensions (mm)

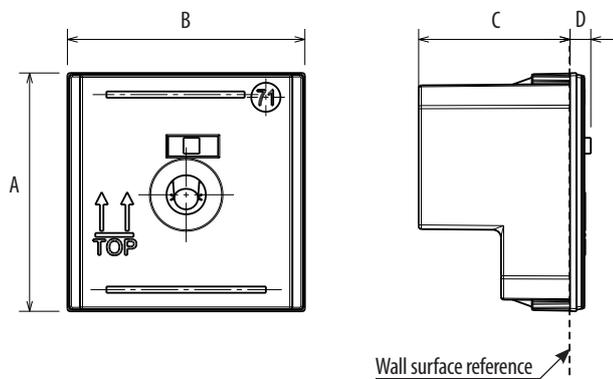

	A	B	C	D
K4382	45.2	44.7	28.5	4

- Electrical characteristics

Voltage: 12V a.c. Power consumption : 0.06 W
Voltage: 24V a.c. Power consumption : 0.08 W
Voltage: 127V a.c. Power consumption : 0.15 W
Voltage: 230V a.c. Power consumption : 0.5 W

- Climatic characteristics

Storage temperature: 10° C to + 70° C
Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60598-2-2
Refer to e.catalogue.