

BE LUX

S3625DL
S3625GL**Use**

In case of a blackout the torch lights turn on and can be removed and taken with you until the power is restored.

Connection

Europlug CEI-EN 50075.

Range

S3625DL	kit - adattatore spina standard tedesca e luce emergenza - bianco
S3625GL	kit - adattatore spina standard tedesca e luce emergenza - grigio

Technical characteristics

Penetration by solid bodies/liquid: IP20.

Material characteristics:

Cover: Polyamide 6.

Lens: Polycarbonate.

Glow-wire performances:

850° C / 30 s for insulating parts holding live parts in place.

650° C / 30 s for other parts made of insulating materials.

Electrical characteristics:


Voltage: 250 V~.

Current: input 10mA.

Time to battery discharge: above 4h.

Climatic characteristics:

Use temperature: - 5° C to + 35° C.

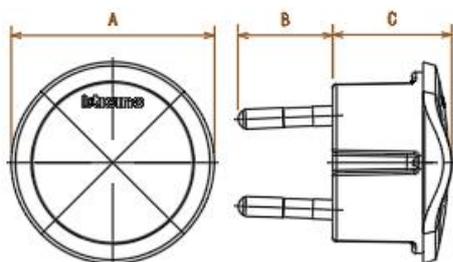

A	B	C
41	19	24

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards EN 60598-1

EN 60598-2-12