


P31 – CABLE TRAYS H75 0,5M BLIND

Reference(s): 31C8C075../100../150../200../300../(Z,G)
3400../39/40/41/42/43
3440../39/40/41/42/43

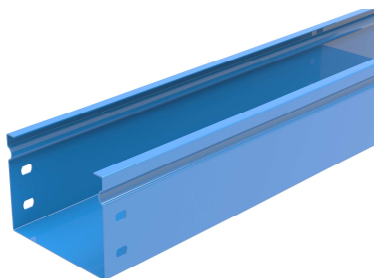

1. USE

Blind cable trays H75 0,5 meters.

2. RANGE

■ 2.1 Blind cable trays 0,5M PG


Description	Code	Code Export	Length		Weight		Thickness		Coating	Section	
			(mm)	(inch)	(Kg)	(lb)	(mm)	(inch)		(mm²)	(inch²)
P31-TRAY BLIND 0,5M 75X75 PG	31C8C075Z	340039	500	19,69	0,79	1,74	0,95	0,04	PG	5746	8,91
P31-TRAY BLIND 0,5M 75X100 PG	31C8C100Z	340040	500	19,69	0,86	1,90	0,95	0,04	PG	7489	11,61
P31-TRAY BLIND 0,5M 75X150 PG	31C8C150Z	340041	500	19,69	1,01	2,23	0,95	0,04	PG	11279	17,48
P31-TRAY BLIND 0,5M 75X200 PG	31C8C200Z	340042	500	19,69	1,47	3,24	0,95	0,04	PG	15014	23,27
P31-TRAY BLIND 0,5M 75X300 PG	31C8C300Z	340043	500	19,69	2,14	4,72	0,95	0,04	PG	22425	34,76

■ 2.2 Blind cable trays 0,5M BLUE

Description	Code	Code Export	Length		Weight		Thickness		Coating	Section	
			(mm)	(inch)	(Kg)	(lb)	(mm)	(inch)		(mm²)	(inch²)
P31-TRAY BLIND 0,5M 75X75 BLUE	31C8C075G	344039	500	19,69	0,79	1,74	0,95	0,04	BLUE	5746	8,91
P31-TRAY BLIND 0,5M 75X100 BLUE	31C8C100G	344040	500	19,69	0,86	1,90	0,95	0,04	BLUE	7489	11,61
P31-TRAY BLIND 0,5M 75X150 BLUE	31C8C150G	344041	500	19,69	1,01	2,23	0,95	0,04	BLUE	11279	17,48
P31-TRAY BLIND 0,5M 75X200 BLUE	31C8C200G	344042	500	19,69	1,47	3,24	0,95	0,04	BLUE	15014	23,27
P31-TRAY BLIND 0,5M 75X300 BLUE	31C8C300G	344043	500	19,69	2,14	4,72	0,95	0,04	BLUE	22425	34,76

3. DIMENSIONS (mm/inch)

Width (W)	
(mm)	(inch)
77	3,03
100	3,94
150	5,91
200	7,87
300	11,81

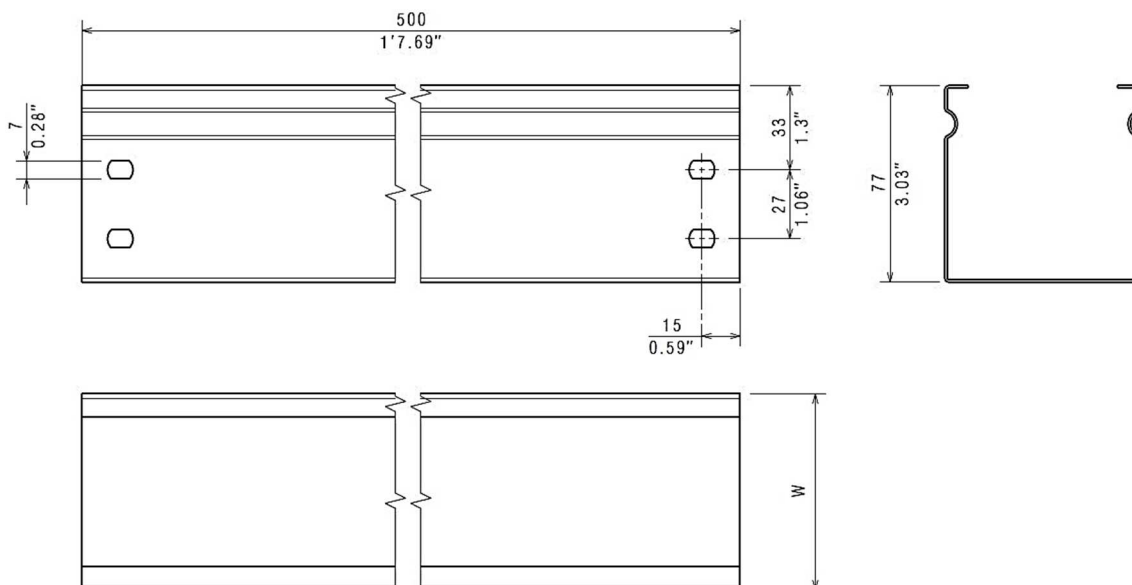

4. INSTALLATION


■ 4.1 Screw

Use screws M6x12 tightened at 11Nm

Reference(s): 341895/ 03V1M610Z (PG)
485035 (Zn-Ni)
346895/ 03V1M610L (SS316L)

■ 4.2 Cable tray to cable tray

Symmetrical cable tray are assembled using two EA couplers LG-X9G71Z (PG) or LG-X9G71C (HDG) and 4 screws M6x12 on each coupler.

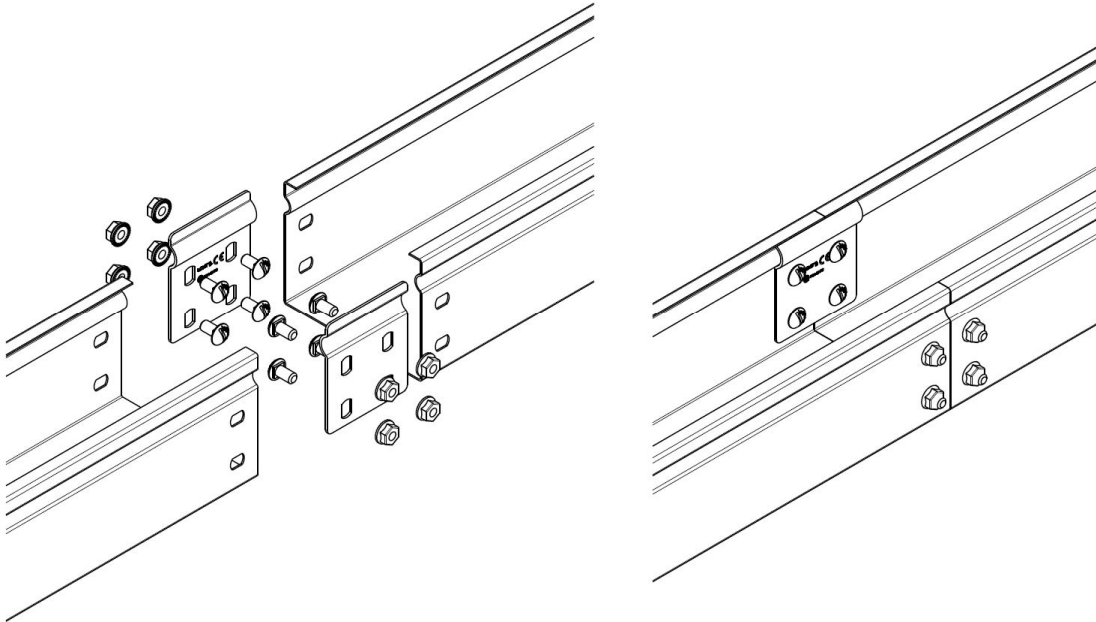

5. TECHNICAL DATA

■ 5.1 Climatic characteristics

Storage and operating temperature: - 20° C à + 120° C

■ 5.2 Material characteristics

Material finish	Material	Standard	Resistance class against corrosion
PG	DX51D + Z200	EN 10346	Classe 3 - CEI 61537
BLUE	DX51D + Z200	EN 10346	Classe 3 - CEI 61537

6. CONFORMITY - CERTIFICATION

Comply with CEI 61537 Cable tray systems

Certification: CE, IMQ