

HD4150

1. USE

Socket outlets: British standard.

2. RANGE

SOCKET OUTLETS



Socket outlet 2 modules - 13 A

- HD4150
- HC4150
- HS4150

SWITCHSOCKET OUTLETS



1-gang DP dual earth - 13 A
With red pilot lamp (LED)
With plate HB4802

- HD4151
- HC4151
- HS4151



2-gang DP dual - 13 A
With red pilot lamp (LED)
With plate HB4830

- HD4152
- HC4152
- HS4152



1-gang DP round earth - 15 A
With red pilot lamp (LED)
With plate HB4802

- HD4153
- HC4153
- HS4153

Conform to BS 1363/BS 456

Color code:

- White
- Tech
- Anthracite

* COMBINATION SWITCHSOCKET OUTLETS/COVER PLATE

Socket	Supporting frame	Cover plates
HD-HC-HS4151	Not needed	HA-HB4829..
HD-HC-HS4152	Not needed	HA-HB4830..
HD-HC-HS4153	Not needed	HA-HB4829..

Comments:

For a correct AXOLUTE cover plates installation on flush mounting boxes Bticino recommends that the minimum distance between boxes, both square (72 x 72) and rectangular (72 x 135) must be 90 mm.

3. OVERALL DIMENSIONS (mm)

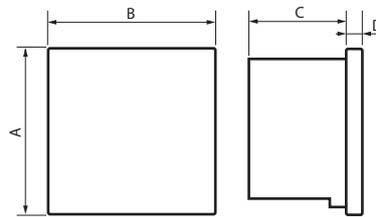


	Plate	A	B	C	D
HD-HC-HS4150	-	45	45	29	9.5
HD-HC-HS4151	HB4829	95	127	19	9.5
HD-HC-HS4152	HB4829	95	195	17	9.5
HD-HC-HS4153	HB4830	95	104	24	9.5

4. CONNECTION

Screw clamps.
Stripping length (rigid or flexible cables): 9 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21 D
Impact test: IK 04

■ 5.2 Material characteristics

Material: Polycarbonate
Colour: White, Tech, Anthracite
Halogen free.
UV resistant.
Self-extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place.
- + 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 127/250 Vac
Current: 13 A - 15 A

■ 5.4 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e.catalogue.