



AXOLUTE

Socket outlet 2 P+E - 16 A

Cat. No(s): HD4142AF - HC4142AF- HS4142AF
HD4142AN - HC4142AN - HS4142AN
HD4142 - HC4142 - HS4142 - H4142R



HD4142AN



HD4142AF

1. USE

16 A - 250 Vac Franco-Belge standard socket outlet.
Mechanism supplied with front cover.
Mechanism to be completed with cover plates and supports.
Flush or wall mounting.


2. RANGE

	Designation	Cat. No.
	2 P+E - 16 A - 250 Vac socket Shielded tulip contacts Screwless terminals	<input type="checkbox"/> HD4142AN <input type="checkbox"/> HC4142AN <input type="checkbox"/> HS4142AN
	2 P+E - 16 A - 250 Vac socket Shielded tulip contacts With screws	<input type="checkbox"/> HD4142 <input type="checkbox"/> HC4142 <input type="checkbox"/> HS4142 <input type="checkbox"/> H4142R
	2 P+E - 16 A - 250 Vac surface socket Shielded tulip contacts Screwless terminals Can be located by LED	<input type="checkbox"/> HD4142AF <input type="checkbox"/> HC4142AF <input type="checkbox"/> HS4142AF

Color code:

- White
- Tech
- Anthracite
- Red

3. OVERALL DIMENSIONS (mm)

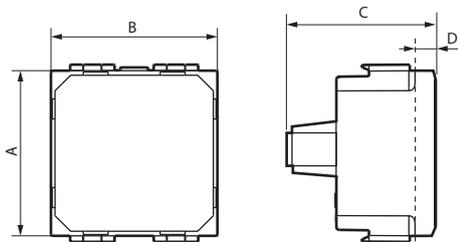

Cat. No.	A	B	C	D
HC/HD/HS4142AN	45	45	39	9.5
HC/HD/HS4142 - HC4142R	45	45	41	9.5
HC/HD/HS4142AF	45	45	40	9.5

4. CONNECTION

Screwless terminals:

Terminal capacity: 2.5 mm²
Stripping length: 13 mm

Screw terminals:

Terminal capacity: 2.5 mm²
Stripping length: 11 mm

5. TECHNICAL CHARACTERISTICS

5.1 Protection index

Penetration by solid bodies/liquid: IP 21
Impact test: IK 04

5.2 Material characteristics

Satin appearance.

Material:

- Socket front cover: Polycarbonate
- Halogen free

Self extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place.
- + 650° C / 30 s for other parts made of insulating materials.

UV resistant.

5.3 Electrical characteristics

Voltage: 250 VAC
Current: 16 A

5.4 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e.catalogue.