



# MatixGo

**JW4033 - JG4033 - JB4033**
**JW4033AB**
**JW4032AB**


## Cord pushbutton



..4033



JW4033AB



JW4032AB

### Use


Cord pushbutton for lighting and other loads.

### Range

Designation	Item
Cord pushbutton 1P (NO/NC) 10A - 250Va.c. 1 module	<input type="checkbox"/> JW4033 - JW4033AB <input checked="" type="checkbox"/> JG4033 <input checked="" type="checkbox"/> JB4033
Cord pushbutton anti-tear 1P (NO/NC) 10A - 250Va.c. 1 module	<input type="checkbox"/> JW4032AB

**Colors:** ☐ White ☒ Grey ☒ Black

### Overall dimensions (mm)

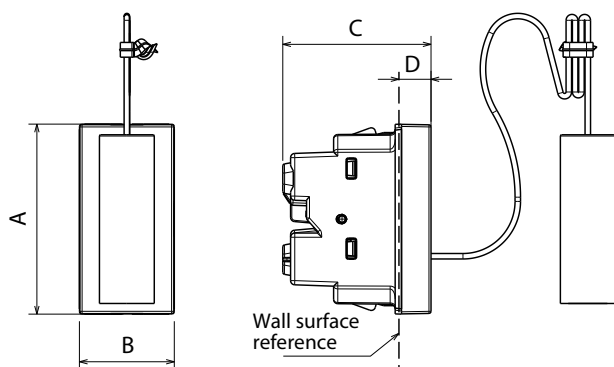

A	B	C	D
45.1	22.5	35.2	7.6

### Connection

Terminal type: screw clamp  
Terminal capacity: 2 x 4 mm<sup>2</sup> max  
Stripping length: 9 mm  
Compatible with flexible or rigid cables

### Technical characteristics

- **Protection index:**  
(considering a complete installation, including cover plate)
  - Penetration by solid bodies/liquid: IP40
  - Impact test: IK04
- **Material characteristics:**
  - Case: PC (polycarbonate)
  - Key cover: ABS
  - Halogen Free
  - UV resistant
  - Self-extinguishing:
    - 850°C/30s for insulating parts holding live parts in place.
    - 650°C/30s for other parts made of insulating material.
  - The key cover of the following items are in antibacterial ABS  
JW4033AB - JW4032AB
- **Electrical characteristics:**
  - Voltage: 250 V a.c.
  - Current: 10A
- **Climatic characteristics:**
  - Storage temperature: -10° C a +70° C
  - Use temperature: -5° C a +35° C

### Cleaning

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

**Caution: Always test before using special cleaning products.**

### Standards and approvals

Compliance with standards IEC/EN/CEI 60669-1.

Refer to e.catalogue.