


MatixGo

JW4321 - JG4321 - JB4321

Fuse-carrier



Use


The use of fuses is always essential for the integrated protection of individual electronic devices which may be short-circuited, thus preventing damage to the internal circuit.

Range

Designation	Item
Fuse-carrier for 5x20 and 6.3x32 fuse max 10A- 250 Va.c. 1 module	<input type="checkbox"/> JW4321 <input type="checkbox"/> JG4321 <input type="checkbox"/> JB4321

Colors: ☐ White ☐ Grey ☐ Black

Overall dimensions (mm)

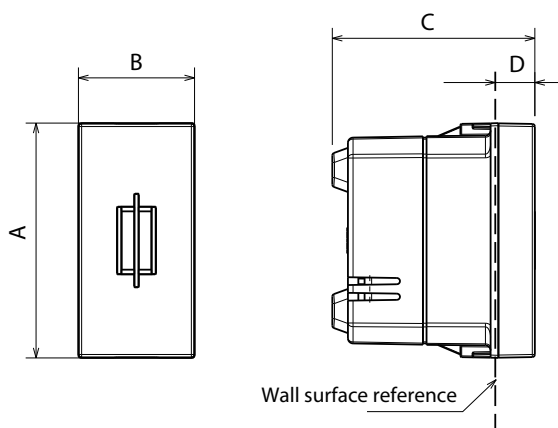

A	B	C	D
45.1	22.5	39	7.6

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 4 mm² max
Stripping length: 11 mm
Compatible with flexible or rigid cables

Technical characteristics

- **Protection index:**
(considering a complete installation, including cover plate)
 - Penetration by solid bodies/liquid: IP40
 - Impact test: IK04
 - **Material characteristics:**
 - Case: PA6-(GF+MD)FR
 - Key cover: PC/ABS
 - Halogen Free
 - UV resistant
 - Self-extinguishing:
- 850°C/30s for insulating parts holding live parts in place.
650°C/30s for other parts made of insulating material.
- **Electrical characteristics:**
 - Voltage: 250 V a.c.
 - Current: 10A
 - **Climatic characteristics:**
 - Storage temperature: -10° C a +70° C
 - Use temperature: -5° C a +35° C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN/CEI 60127-1.

Refer to e.catalogue.