


# MatixGo

JW4362 - JG4362 - JB4362

## Lighting

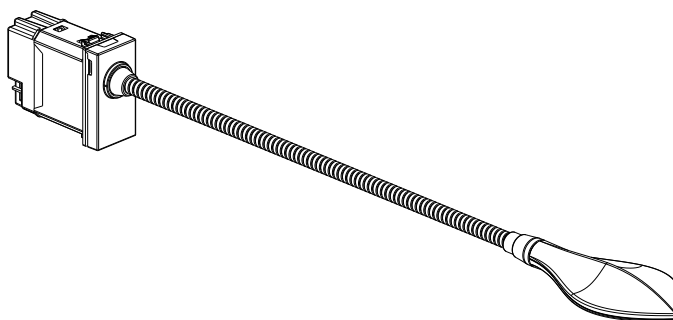

### Use


Reading lamp dimmable.  
installing the head of the bed allowing you to have a directional light. It is equipped with a flexible arm (length 31 cm) that allows you to orient the illuminating ends.  
The light intensity can be dimmed by pressing and holding the On/Off integrated command.  
It can also be connected to a remote control and, if necessary, you can disable the built-in command with a 30 sec pressure .

### Range

Designation	Item
Reading lamp dimmable. - 1 module	<input type="checkbox"/> JW4362
	<input checked="" type="checkbox"/> JG4362
	<input type="checkbox"/> JB4362

Colors: ☐ White ☒ Grey ☐ Black

### Overall dimensions (mm)

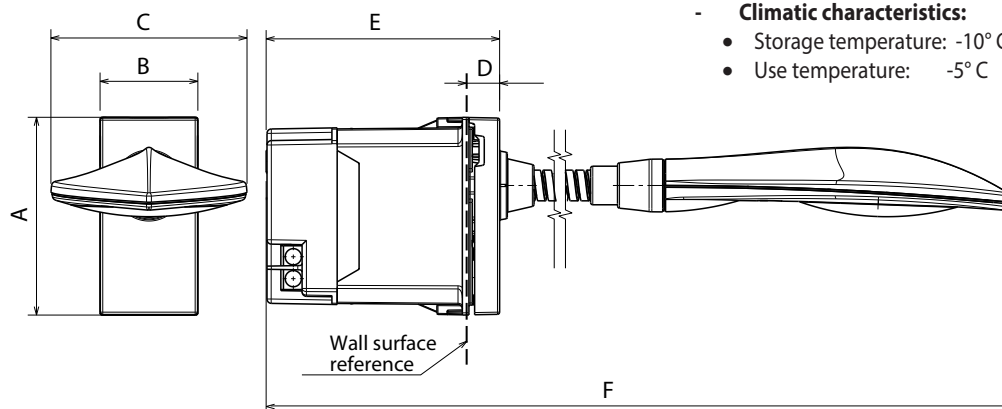

A	B	C	D	E	F
45.1	22.5	44.7	7.6	53.3	191

### Connection

Terminal type: screw clamp  
Terminal capacity: 1 x 1.5mm<sup>2</sup> max  
Stripping length: 8 mm  
Compatible with flexible or rigid cables

### Technical characteristics

- **Protection index:**  
(considering a complete installation, including cover plate)
  - Penetration by solid bodies/liquid: IP40
  - Impact test: IK04
- **Material characteristics:**
  - Case: PC (polycarbonate)
  - Cover: ABS
  - Halogen Free
  - UV resistant
  - Self-extinguishing:
    - 850°C/30s for insulating parts holding live parts in place.
    - 650°C/30s for other parts made of insulating material.
- **Electrical characteristics:**
  - Voltage: 230 V a.c.
  - Frequency: 50 Hz
  - Consumption: 3.3 W
  - Luminous Flux: 110 Lumen (equivalent to 15W incandescent).
- **Climatic characteristics:**
  - Storage temperature: -10° C a +70° C
  - Use temperature: -5° C a +35° C

### Cleaning

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

**Caution: Always test before using special cleaning products.**

### Standards and approvals

Compliance with standards CEI/EN 60598-1,  
2-2. Refer to e.catalogue.