



MatixGo

Flush wireless switch


JW4003CWI - JG4003CWI - JB4003CWI
 JW4027CWI - JG4027CWI - JB4027CWI
 JW4007CWI - JG4007CWI - JB4007CWI
 JW4570CWI - JG4570CWI - JB4570CWI
 JW4574CWI - JG4574CWI - JB4574CWI




JW4003CWI
JG4003CWI
JB4003CWI




JW4027CWI
JG4027CWI
JB4027CWI



JW4007CWI
JG4007CWI
JB4007CWI



JW4570CWI
JG4570CWI
JB4570CWI



JW4574CWI
JG4574CWI
JB4574CWI

Use

Wireless switch equipped with 2 buttons for ON/OFF and dimming control of one or more connected devices for the lighting control (J_4003CWI), control one or more connected rolling shutter switches (J_4027CWI), control multicolour lighting (J_4007CWI), for activating Home/Away - Wake up/Sleep scenarios (J_4570CWI - J_4574CWI). All devices are customizable using the Home+Control APP. Flush installation into a flush mounting box. Integrated LED for low battery indication. 1 module.

Range

Designation

All controls, with battery.
 Equipped with an LED indicator (configuration) and a RESET button (hidden) used to return to factory settings.


Cat. Nos.

- ☐ JW4003CWI
- ☐ JG4003CWI
- ☐ JB4003CWI
- ☐ JW4027CWI
- ☐ JG4027CWI
- ☐ JB4027CWI
- ☐ JW4007CWI
- ☐ JG4007CWI
- ☐ JB4007CWI
- ☐ JW4570CWI
- ☐ JG4570CWI
- ☐ JB4570CWI
- ☐ JW4574CWI
- ☐ JG4574CWI
- ☐ JB4574CWI

Colours code:

☐ White ☐ Grey ☐ Black

Overall dimensions (mm)

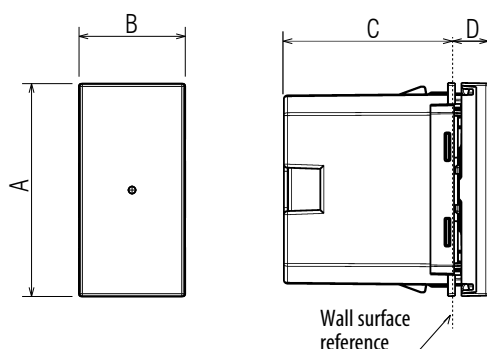

| A | B | C | D |
|----|------|------|-----|
| 45 | 22,5 | 35,6 | 7,6 |

Technical characteristics

- Mechanical characteristics

Protection against impacts: IK 02

Protection against solid bodies/liquids: IP 20 without plate and rocker plate

- Material characteristics

Mechanism casing: ABS

Mechanism functional cover: PC

Halogen-free

UV resistant

Self-extinguishing: 650°C/30 s

- Electrical characteristics

Powered by a CR2032 - 3 V lithium battery (supplied)

Battery life: 8 years for 10 activations a day

ZigBee radio technology frequency: 2.4 GHz to 2.4835 GHz

Wireless mesh network, self-adaptive and secure (AES 128), conforming to standard

IEEE 802.15.4 (LR-WPAN)

Power level: < 100 mW

- Climate characteristics

Usage temperature: + 5° C to + 45° C


Storage temperature: 0° C to + 45°

Standards and approvals


The undersigned, BTICINO, declares that the radio-electric equipment type (JW4003CWI - JG4003CWI - JB4003CWI - JW4027CWI - JG4027CWI - JB4027CWI - JW4007CWI - JG4007CWI - JB4007CWI - JW4570CWI - JG4570CWI - JB4570CWI - JW4574CWI - JG4574CWI - JB4574CWI) complies with directive 2014/53/EU. The full text of the EU declaration of conformity is available on the following website: www.bticino.it/red

Operation

Front view

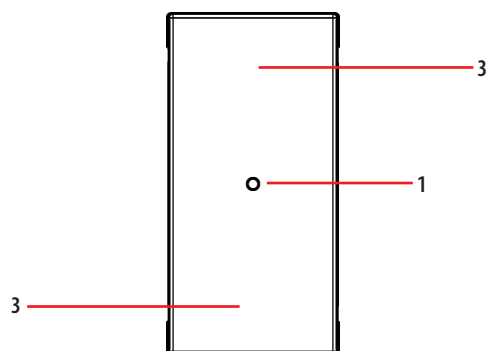

Front view without coverkey

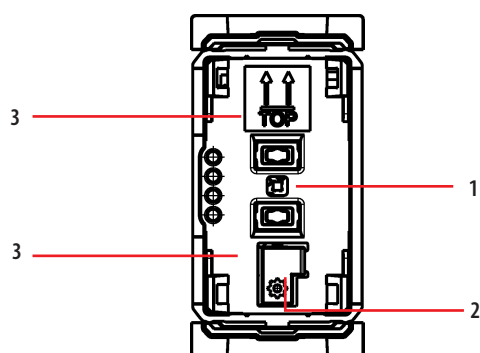

Legend

1. LED indicator: useful during installation
2. RESET button used to return to factory settings
3. Control pushbutton

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

The plates must not be painted.



Take care to recycle the battery appropriately.

RAEE/WEEE: bticino.com/disposal