



MatixGo

- One-way switches
- Two-way switches
- Four-way switches
- Pushbutton


JW4001 - JW4001AB - JG4001 - JB4001
JW4003 - JW4003AB - JG4003 - JB4003
JW4003A20 - JG4003A20 - JB4003A20
JW4004 - JW4004AB - JG4004 - JB4004
JW4005 - JW4005AB - JG4005 - JB4005
JW4034 - JG4034 - JB4034 -- JW4034CMAB




..4001..
..4005..



..4003..
..4034



..4004..



JW4034CMAB

Use

Rocker control device for lighting and other loads.


Range

Designation	Item
One-way 1P 10AX - 250Va.c. lighttable with led lamp (see table below) 1 module	☐ JW4001 - JW4001AB ☐ JG4001 ☐ JB4001
Two-way 1P 10AX - 250Va.c. lighttable with led lamp (see table below) 1 module	☐ JW4003 - JW4003AB ☐ JG4003 ☐ JB4003
Two-way 1P 20AX - 250Va.c. lighttable with led lamp (see table below) 1 module	☐ JW4003A20 ☐ JG4003A20 ☐ JB4003A20
Four-way 1P 10AX - 250Va.c. lighttable with led lamp (see table below) 1 module	☐ JW4004 - JW4004AB ☐ JG4004 ☐ JB4004
Pushbutton 1P (NO) 10A - 250Va.c. lighttable with led lamp (see table below) 1 module	☐ JW4005 - JW4005AB ☐ JG4005 ☐ JB4005
Opening Pushbutton 1P (NO - NC) 10A - 250Va.c. lighttable with led lamp (see table below) 1 module	☐ JW4034 ☐ JG4034 ☐ JB4034
Stop rest-room call pushbutton 1P (NO - NC) 10A - 250Va.c. 1 module	☐ JW4034CMAB

LED Color	230 Va.c.	12/24 Va.c.	127 Va.c.
White	LN4742V230T	LN4742V12T	LN4742V127T
Blue	LN4742V230B		LN4742V127B

Colors: ☐ White ☐ Grey ☐ Black

Overall dimensions (mm)

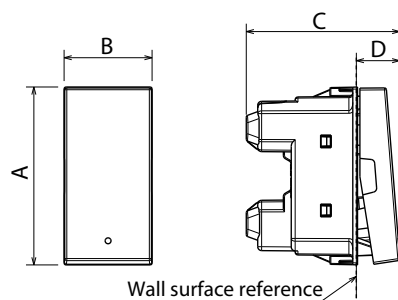

	A	B	C	D
..4001.. / ..4003... / ..4005.. / ..4034	45.1	22.3	39	11
..4004..	45.1	22.3	40	11

Connection

Terminal type: screw clamp
 Terminal capacity: 2 x 4 mm² max
 Stripping length: 9 mm
 Compatible with flexible or rigid cables

Technical characteristics

- **Protection index:**
(considering a complete installation, including cover plate)
 - Penetration by solid bodies/liquid: IP40
 - Impact test: IK04
- **Material characteristics:**
 - Case: PC (polycarbonate)
 - Key cover: ABS
 - Halogen Free
 - UV resistant
 - Self-extinguishing:
- 850°C/30s for insulating parts holding live parts in place.
650°C/30s for other parts made of insulating material.
 - The key cover of the following items are in antibacterial ABS
JW4001AB - JW4003AB - JW4004AB - JW4005AB
- **Electrical characteristics:**
 - Voltage: 250 V a.c.
 - Current: 10AX per ..4001 - ..4003 - ..4004
 - Current: 10A per ..4005 - ..4034
 - Current: 20AX per ..4003A20
- **Climatic characteristics:**
 - Storage temperature: -10° C a +70° C
 - Use temperature: -5° C a +35° C

Cleaning

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1.
 Refer to e.catalogue.