



# MatixGo

**JW4012 - JG4012 - JB4012**  
**JW4022 - JG4022 - JB4022**

## Switches with Key



### Use


Key controls for lighting and other controls

### Range

Designation	Item
1-Way switch 2P 10AX - 250Va.c. with key	<input type="checkbox"/> JW4012
- the key can be removed in both positions	<input type="checkbox"/> JG4012
- the keys are different for the various devices	<input type="checkbox"/> JB4012
1 module	
2-Way switch 1P 10AX - 250Va.c. with key	<input type="checkbox"/> JW4022
- the key can be removed in both positions	<input type="checkbox"/> JG4022
- the keys are different for the various devices	<input type="checkbox"/> JB4022
1 module	

**Colors:** ☐ White ☐ Grey ☐ Black

### Overall dimensions (mm)

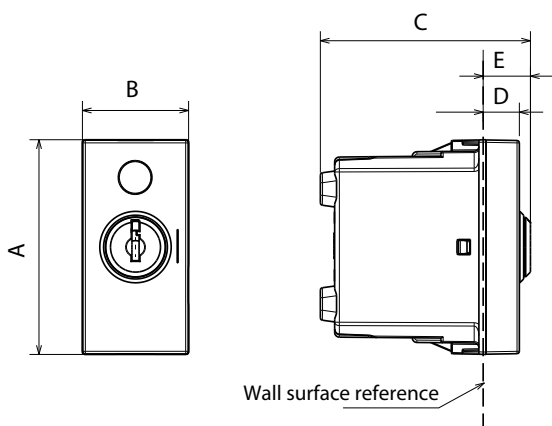

	A	B	C	D	E
..4012 - ..4022	45.1	22.5	44.1	7.6	9.9

### Connection

Terminal type: screw clamp  
Terminal capacity: 2 x 4 mm<sup>2</sup> max  
Stripping length: 11 mm  
Compatible with flexible or rigid cables

### Technical characteristics

- **Protection index:**  
(considering a complete installation, including cover plate)
  - Penetration by solid bodies/liquid: IP40
  - Impact test: IK04
- **Material characteristics:**
  - Case: PC (polycarbonate)
  - Key cover: PC/ABS
  - Halogen Free
  - UV resistant
  - Self-extinguishing:
    - 850° C / 30 s for insulating parts holding live parts in place
    - 650° C / 30 s for other parts made of insulating materials
- **Electrical characteristics**  
Voltage: 250 V a.c.  
Current: 10 AX
- **Climatic characteristics**  
Storage temperature: - 10° C to + 70° C  
Use temperature: - 5° C to + 35° C

### Cleaning

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.  
**Caution: Always test before using special cleaning products.**

### Standard and approvals

Compliance with standards IEC/EN 60669-1.  
Refer to e.catalogue.