


# MatixGo

**JW4351V12 - JG4351V12 - JB4351V12**  
**JW4351V230 - JG4351V230 - JB4351V230**  
**JW4356V12 - JG4356V12 - JB4356V12**  
**JW4356V230 - JG4356V230 - JB4356V230**

## Acoustic signal devices

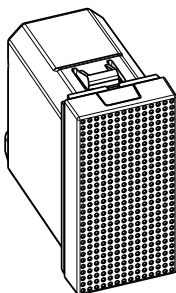

### Use


Acoustic signal devices: buzzer, bronze bell.

### Range

Designation	Item
Bronze bell 5VA - 12 Va.c. - 80dB - 1 module	<input type="checkbox"/> JW4351V12
	<input type="checkbox"/> JG4351V12
	<input type="checkbox"/> JB4351V12
Bronze bell 8VA - 230Va.c. - 80dB - 1 module	<input type="checkbox"/> JW4351V230
	<input type="checkbox"/> JG4351V230
	<input type="checkbox"/> JB4351V230
Buzzer 5VA - 12 Va.c. - 80dB - 1 module	<input type="checkbox"/> JW4356V12
	<input type="checkbox"/> JG4356V12
	<input type="checkbox"/> JB4356V12
Buzzer 8VA - 230Va.c. - 80dB - 1 module	<input type="checkbox"/> JW4356V230
	<input type="checkbox"/> JG4356V230
	<input type="checkbox"/> JB4356V230

**Colors:** ☐ White ☐ Grey ☐ Black

### Overall dimensions (mm)

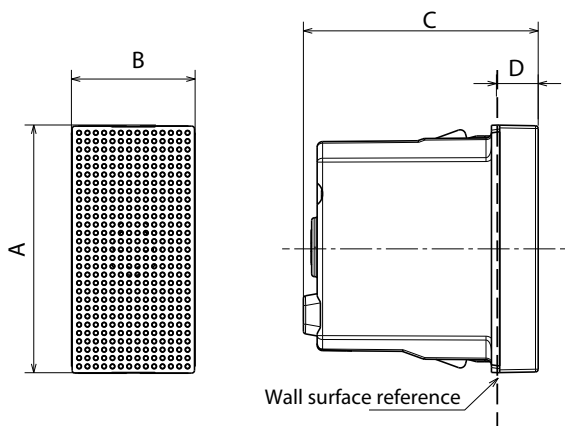

A	B	C	D
45.1	22.5	42.7	7.6

### Connection

Terminal type: screw clamp  
Terminal capacity: 2 x 2.5mm<sup>2</sup> max  
Stripping length: 9 mm  
Compatible with flexible or rigid cables

### Technical characteristics

- **Protection index:**  
(considering a complete installation, including cover plate)
  - Penetration by solid bodies/liquid: IP40
  - Impact test: IK04
- **Material characteristics:**
  - Case: PC (polycarbonate)
  - Cover: ABS
  - Halogen Free
  - UV resistant
  - Self-extinguishing:  
850°C/30s for insulating parts holding live parts in place.  
650°C/30s for other parts made of insulating material.
- **Electrical characteristics:**
  - J.4351V230 - J.4356V230
  - Voltage: 230 V a.c.
  - Current: 8VA
  - J.4351V12 - J.4356V12
  - Voltage: 12 V a.c.
  - Current: 5VA
- **Climatic characteristics:**
  - Storage temperature: -10° C a +70° C
  - Use temperature: -5° C a +35° C

### Cleaning

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

**Caution: Always test before using special cleaning products.**

### Standards and approvals

Compliance with standards IEC/EN/62080.

Refer to e.catalogue.