


Pushbutton lightable with nameplate



Use

Pushbutton for loads up to 3A

Range

Designation

Item

Pushbutton lightable with nameplate
1P (NO) 3A- 250Va.c. with dry contact
and backlighting with integrated white
LED (the LED is not interchangeable)
2 modules

K4040N

Connection


Terminal type: screw clamp
Terminal capacity: 4 mm max
Stripping length: 9mm
Terminals 1-2: dry contact (NO)
Terminals L-N: Live and Neutral contact
Compatible with flexible or rigid cables



Technical characteristics

- **Protection index:**
(considering a complete installation, including cover plate)
 - Penetration by solid bodies/liquid: IP40
 - Impact test: IK04
- **Material characteristics:**
 - Case: PC (polycarbonate)
 - Key cover : PC
 - Halogen Free
 - UV resistant
 - Self-extinguishing:
850°C/30s for insulating parts holding live parts in place.
650°C/30s for other parts made of insulating material.
- **Electrical characteristics:**
 - Voltage: 250 V a.c.
 - Current: 3A
 - Integrated LED: 30Va.c. 0.5W
- **Climatic characteristics:**
 - Storage temperature: -10° C a +70° C
 - Use temperature: -5° C a +35° C

Overall dimensions (mm)

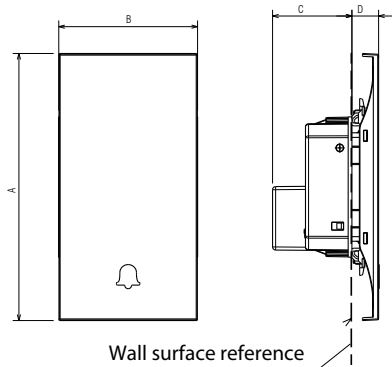

A	B	C	D
86	44.7	25.55	8.6

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN/CEI 60669-1.

Refer to e.catalogue.