


SUPPORTI A PAVIMENTO

FLOOR SUPPORT

SUPPORTS DE PLANCHER

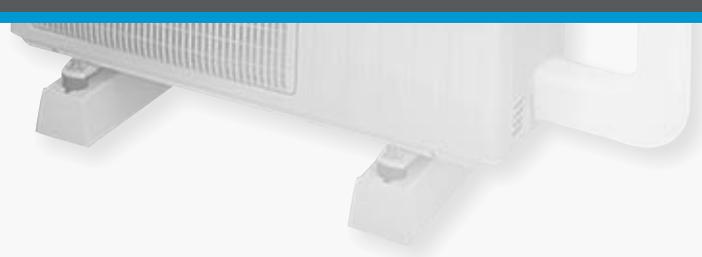

CONBASE base a pavimento in polipropilene - unità ester.
 floor support in polypropylene - external section
 base à plancher en polypropylène - unité extér.



CONBASE	420 x 120 x 72,5 mm	250	2
---------	---------------------	-----	---

Resistente ai raggi UV ed alle alte temperature con adesivo antivibrante da applicare sul fondo.
 Resistant to UV rays and to high temperatures, with adhesive strip against vibration.
 Résistant aux rayons UV et à des températures élevées, avec bande adhésive contre les vibrations.

*Carico massimo ammissibile senza tener conto di qualsiasi fattore di sicurezza
 Maximun admissible load without taking into account any security factor
 Charge maximale admissible sans tenir compte de tout facteur de sécurité

CONBASE base a pav. in PVC - unità esterna
 floor support in PVC - external section
 base à plancher en PVC - unité extérieure



CONBASE35N	350 x 84 x 80 mm	160	12
CONBASE45N	450 x 84 x 80 mm	160	12
CONBASE100N	1000 x 84 x 80 mm	200	2

Con fondo antisdrucciolo coestruso. Senza tappi.
 With slip resistant surface coextruded. Without support cap.
 Avec antidérapant coextrudé sur le fond. Sans bouchons.

*Carico massimo ammissibile senza tener conto di qualsiasi fattore di sicurezza
 Maximun admissible load without taking into account any security factor
 Charge maximale admissible sans tenir compte de tout facteur de sécurité

CONBASE base a pav. in PVC evolution - unità esterna
 floor support in PVC - external section
 base à plancher en PVC - unité extérieure



CONBASE35EVO	350 x 95 x 90 mm	350	12
CONBASE45EVO	450 x 95 x 90 mm	350	12
CONBASE100EVO	1000 x 95 x 90 mm	350	2

Con fondo antisdrucciolo coestruso. Senza tappi.
 With slip resistant surface coextruded. Without support cap.
 Avec antidérapant coextrudé sur le fond. Sans bouchons.

*Carico massimo ammissibile senza tener conto di qualsiasi fattore di sicurezza
 Maximun admissible load without taking into account any security factor
 Charge maximale admissible sans tenir compte de tout facteur de sécurité