

**173****SONDA PASSACAVI
FISH TAPE**

 Sonda in poliestere Ø 3 mm
con terminali intercambiabili filettati M4

Dotata di:
testa flessibile guidacurve ed asola tirante

 Polyester fish tape Ø 3 mm
with interchangeable heads M4

Supplied with:
flexible head and pulling nylon eyelet

**SCHEMA TECNICA**

Sonda passacavi monofilo Ø 3 mm realizzata in poliestere ad esecuzione elicoidale - *tortiglione* - con due perni filettati M4 crimpati come terminali, in ottone.

I due perni filettati, montati sulla sonda, permettono l'intercambiabilità degli accessori in dotazione: una testa flessibile guidacurve in ottone e corda d'acciaio inox ed un'asola tirante in nylon ed ottone.

Indicata per essere utilizzata in cantieri di impiantistica civile, la sonda in poliestere risulta essere la soluzione ideale per la messa a dimora dei conduttori.

Può essere introdotta in tutte le condotte di diametro superiore a 16 mm ed in caso di piegature accidentali, la sonda ritorna al 90% della sua posizione naturale. Supera agilmente 5 curve sia nel tubo rigido che nel corrugato, senza dover installare la scatola rompitratta.

Ideale in caso di ristrutturazione e/o rifacimento di impianti vecchi o con situazioni di particolare difficoltà d'infilaggio, anche con cavi preinfilati.

Inoltre, con l'asola tirante non si dovranno più spellare o nasturare i cavi: basterà infilarli per 10 cm all'interno dell'asola e procedere con l'inserimento della sonda.

**DATA SHEET**

Monofilament fish tape made with twisted polyester Ø 3 mm with two interchangeable pins M4 fixed on both ends, made with brass.

The two pins allow the interchangeability of the supplied accessories: a flexible head made with brass and stainless steel rope and a pulling eyelet made with nylon and brass.

Suitable for civil application, this fish tape represent the latest innovation in the field of professional equipment for installing cables insides pipes.

It can be introduced into all pipelines of diameter higher than 16 mm and in case of accidental flexion, the fish tape come back to its natural position at 90%.

It can easily pass 5 curves inside corrugated and rigid pipes, without installing the junction box.

It can be used in case of renovation and/or refurbishment of old electrical system or in case of difficulties situation, also in ducts with pre-inserted cables.

In addition, you only need to insert 10 cm of the cables into the pulling nylon eyelet, bend them and proceed with the installations inside pipes.



CARATTERISTICHE TECNICHE

Le sonde in poliestere rappresentano la svolta tecnologica in campo delle attrezzature per l'installazione dei conduttori ed offrono prestazioni di altissimo livello: infatti l'esecuzione ad elica crea una maggior nervatura (Fig. 1) che consente al materiale di avere una propria energia.

Inoltre, questo tipo di sviluppo formale aumenta la superficie della sonda ma, al tempo stesso, ne riduce i punti di appoggio, ottenendo una riduzione dell'attrito del 50% (Fig. 2).

Attenzione!

Per la riparazione delle sonde in poliestere non servono collanti.

Fig. 1

I punti 2 indicano la nervatura elicoidale delle sonde in poliestere.

The points 2 show the spiral veining of the polyester fishtapes.



TECHNICAL DATA

The polyester fish tapes represent the latest innovation in the field of professional equipment and they offer high level performances: the twisted shape create a bigger veining (Fig. 1) and that's allow to the material to have a proper self-energy.

This kind of shape increase the surface of the fishtape, but at the same time the supporting points are reduced, which means a lower friction equivalent to 50% (Fig. 2).

Caution!

No adhesive is required for repairing polyester fish tape.

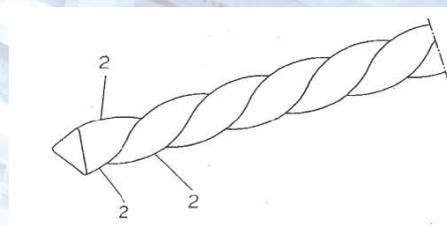


Fig. 2

TUBO RIGIDO
RIGID PIPE

TUBO CORRUGATO
CORRUGATED PIPE



SOLO I PUNTI TRATTEGGIATI SFREGANO SULLA SUPERFICIE INTERNA DELLE CONDOTTE
ONLY THE OUTLINED POINTS RUB ON THE INTERNAL SURFACE OF THE DUCTS

- ✓ Per uso professionale
- ✓ Per impiantistica civile
- ✓ Terminali intercambiabili
- ✓ Misure disponibili: 5-10-15 m
- ✓ Carico di rottura: 80 kg
- ✓ 100% Poliestere
- ✓ Monofilo
- ✓ Non si spezza
- ✓ Non si deforma
- ✓ Attrito ridotto del 50%

- ✓ For professional use
- ✓ For civil application
- ✓ Interchangeable heads
- ✓ Available lengths: 5-10-15 m
- ✓ Breaking load: 80 kg
- ✓ 100% Polyester
- ✓ Monofilament
- ✓ Does not break
- ✓ Does not deform
- ✓ Friction reduced by 50%



CARATTERISTICHE TECNICHE



TECHNICAL DATA

art.	DESCRIZIONE / DESCRIPTION			
173	Sonda passacavi in poliestere <i>Polyester fish tape</i>	Forma / Shape	Elicoidale / Twisted	
		Diametro / Diameter	Ø 3 mm	
		Colore / Colour	Verde / Green	
		Caratteristiche cavidotto <i>Cable duct features</i>	Vuoto / Empty	✓
			Con cavi / With cables	✓
		Flessibilità / Flexibility	Molto alta / Very high	
		Facilità d'uso / Ease of use	Molto alta / Very high	
		Forza d'introduzione <i>Pushing strength</i>	Alta High	
		Rischio di rottura / Breaking risk	Quasi nullo / Almost nil	
		Vita media / Average life	Molto lunga / Very long	
Prestazioni generali <i>General performance</i>	Leggera, robusta e versatile; rigida e flessibile contemporaneamente, riesce a superare 5 curve in tutti i tipi di condotte <i>Light, strong and versatile; rigid and flexible at same time, can easily pass 5 curves inside all pipelines</i>			

N.B. I dati tecnici riportati in tabella sono indicativi e fanno riferimento a test previsti dal nostro sistema interno.
I valori riportati in tabella fanno riferimento ad un uso corretto della sonda.
*Technical data mentioned in table are approximate values and refer to test provided by our system.
The values mentioned in table refer to proper use of the fishtape.*

art.		BARCODE	
173/05	1	8 024818 010442	0,090 kg
173/10	1	8 024818 010459	0,170 kg
173/15	1	8 024818 010466	0,200 kg

ARTICOLI IN DOTAZIONE

ITEMS SUPPLIED

art.	DESCRIZIONE / DESCRIPTION	
601/18	1	Testa flessibile guidacurve in corda d'acciaio inox <i>Flexible head made with stainless steel rope</i>
601/19	1	Asola tirante in nylon <i>Pulling nylon eyelet</i>

**ARTICOLI CORRELATI****RELATED ITEMS**

art.	DESCRIZIONE / DESCRIPTION
601/18C	Testa flessibile guidacurve in corda d'acciaio inox <i>Flexible head made with stainless steel rope</i>
651/01	Contenitore portasonda <i>Case for fish tape</i>
651/09	Aspo portasonda <i>Reel for fish tape</i>
651/11	Aspo portasonda <i>Reel for fish tape</i>
673/01	Perno filettato M4 <i>M4 threaded pin</i>
191	Liquido scorricavo professionale <i>Professional lubricant for installing electrical cables</i>
193	Liquido scorricavo professionale <i>Professional lubricant for installing electrical cables</i>
197	Schiuma lubrificante professionale <i>Professional lubricant foam for installing electrical cables</i>
199	Gel lubrificante professionale <i>Professional lubricant gel for installing electrical cables</i>
201	Liquido scorricavo professionale <i>Professional lubricant for installing electrical cables</i>
207	Tracciante per interni <i>Marking paints for indoor</i>
209	Tracciante per esterni <i>Marking paints for outdoor</i>
801	Calza tirante di testa per sonde filettate M4 <i>Cable grips with threaded bush M4</i>
802	Calza tirante di testa per sonde filettate M4 <i>Cable grips with threaded bush M4</i>