

505/02**SVOLGITORE
UNWINDER**

Svolgitore per matasse o bobine



Unwinding coil

**SCHEMA TECNICA**

Svolgitore da banco o da terra innovativo e versatile, di assoluta robustezza e resistenza che si presta a molteplici utilizzi, sia all'interno di officine che all'interno di cantieri civili ed industriali, quali: elettrici, meccanici e navali.

Attrezzatura ideale per lo svolgimento di piccole bobine e/o cavi in matasse sciolte e/o imballate, anche di grandi dimensioni.

Realizzato in lamiera verniciata, lo svolgitore è caratterizzato da una struttura solida, compatta, con ingombro ridotto e stabile su qualsiasi superficie. Inoltre è completamente smontabile e non necessita di manutenzione.

E' costituito da una base a crociera 500x500mm con piedini in gomma antisdrucciolo sul quale poggia un cuscinetto ad alta portata e sul quale, a sua volta, è fissato il disco portamatassa di Ø600mm.

Lo svolgitore è dotato di due staffe regolabili su binario che consentono di adattarsi al meglio al diametro interno della matassa o della bobina.

Adatto per tutti i tipi di cavo, inclusi: fibra ottica, guaine, corrugato, tubi per l'aria, tubi per l'acqua, tubi idraulici, ecc.

Disponibile anche nella versione con ruote piroettanti con freno: cod. 505/02R.

**DATA SHEET**

Innovative and versatile bench or floor uncoiler of absolute strength and resistance that lends itself to multiple uses, both in workshops and in civil and industrial construction sites, such as: electrical, mechanical and naval.

Ideal equipment for unwinding small reels and/or cables in loose and/or packed coils, even large ones.

Made of painted sheet metal, the unwinder is characterised by a solid, compact, space-saving structure that is stable on any surface. In addition, it is completely demountable and maintenance-free.

Consisting of a 500x500mm cross-shaped base with non-slip rubber feet on which rests a high-capacity bearing and to which, in turn, is fixed the Ø600mm hank-holder disc.

The unwinder is equipped with two adjustable brackets on a guide rail, allowing it to adapt to the internal diameter of the coil or reel.

Suitable for all types of cable, including: optical fibre, conduit, corrugated, air hoses, water hoses, hydraulic hoses, etc.

Also available with pivoting wheels with brake: art. 505/02R.

**CARATTERISTICHE TECNICHE**

- ✓ Per uso professionale
- ✓ Facile da assemblare
- ✓ Ingombro ridotto
- ✓ Diametro disco: Ø 600 mm
- ✓ Portata: 70 kg
- ✓ Peso: 5,5 kg

DIMENSIONI

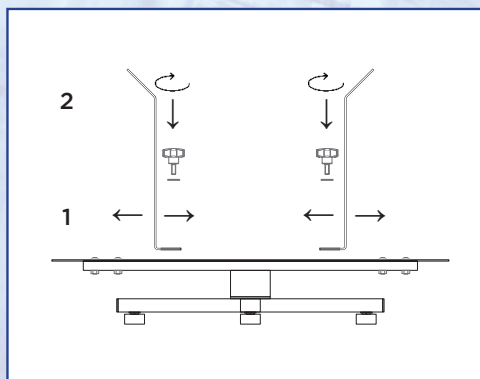
LxPxH= Ø600x370 mm

**TECHNICAL DATA**

- ✓ For professional use
- ✓ Easy to assemble
- ✓ Small footprint
- ✓ Disc diameter: Ø 600 mm
- ✓ Max reel weight: 70 kg
- ✓ Weight: 5,5 kg

DIMENSIONS

LxDxH= Ø450x370 mm

**ISTRUZIONI DI MONTAGGIO****INSTALLATION INSTRUCTIONS**

art.



BARCODE

**505/02**

1



5,5 kg