



505/02R SVOLGITORE UNWINDER



Svolgitore per matasse o bobine



Unwinding coil



SCHEMA TECNICA

Svolgitore da banco o da terra innovativo e versatile, di assoluta robustezza e resistenza che si presta a molteplici utilizzi, sia all'interno di officine che all'interno di cantieri civili ed industriali, quali: elettrici, meccanici e navali.

Attrezzatura ideale per lo svolgimento di piccole bobine e/o cavi in matasse sciolte e/o imballate, anche di grandi dimensioni.

Realizzato in lamiera verniciata, lo svolgitore è caratterizzato da una struttura solida, compatta, con ingombro ridotto e stabile su qualsiasi superficie. Inoltre è completamente smontabile e non necessita di manutenzione.

E' costituito da una base a crociera 500x500mm con ruote piroettanti con freno sul quale poggia un cuscinetto ad alta portata e sul quale, a sua volta, è fissato il disco portamatassa di Ø600mm.

Lo svolgitore è dotato di due staffe regolabili su binario che consentono di adattarsi al meglio al diametro interno della matassa o della bobina.

Adatto per tutti i tipi di cavo, inclusi: fibra ottica, guaine, corrugato, tubi per l'aria, tubi per l'acqua, tubi idraulici, ecc.

Disponibile anche nella versione con piedini in gomma antisdrucciolo: cod. 505/02.



DATA SHEET

Innovative and versatile bench or floor uncoiler of absolute strength and resistance that lends itself to multiple uses, both in workshops and in civil and industrial construction sites, such as: electrical, mechanical and naval.

Ideal equipment for unwinding small reels and/or cables in loose and/or packed coils, even large ones.

Made of painted sheet metal, the unwinder is characterised by a solid, compact, space-saving structure that is stable on any surface. In addition, it is completely demountable and maintenance-free.

Consisting of a 500x500mm cross-shaped base with swivelling wheels with brakes on which rests a high capacity bearing and on which, in turn, is fixed the Ø600mm hank-holder disc.

The unwinder is equipped with two adjustable brackets on a guide rail, allowing it to adapt to the internal diameter of the coil or reel.

Suitable for all types of cable, including: optical fibre, conduit, corrugated, air hoses, water hoses, hydraulic hoses, etc.

Also available with non-slip rubber feet: art. 505/02R.

**CARATTERISTICHE TECNICHE**

- ✓ Per uso professionale
- ✓ Facile da assemblare
- ✓ Ingombro ridotto
- ✓ Diametro disco: Ø 600 mm
- ✓ Portata: 70 kg
- ✓ Peso: 6,0 kg

DIMENSIONI

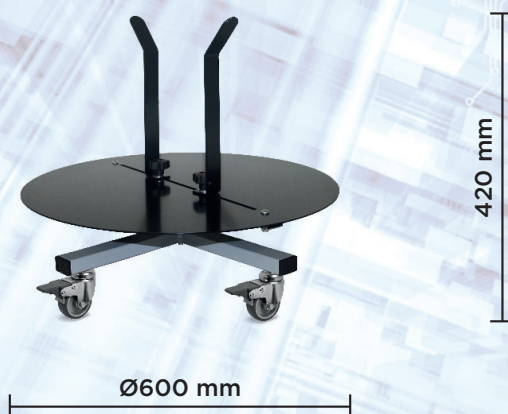
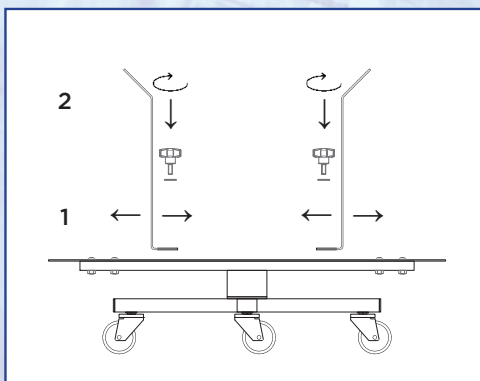
LxPxH= Ø600x420 mm

**TECHNICAL DATA**

- ✓ For professional use
- ✓ Easy to assemble
- ✓ Small footprint
- ✓ Disc diameter: Ø 600 mm
- ✓ Max reel weight: 70 kg
- ✓ Weight: 6,0 kg

DIMENSIONS

LxDxH= Ø450x420 mm

**ISTRUZIONI DI MONTAGGIO****INSTALLATION INSTRUCTIONS**

art.



BARCODE

**505/02R**

1



6,0 kg