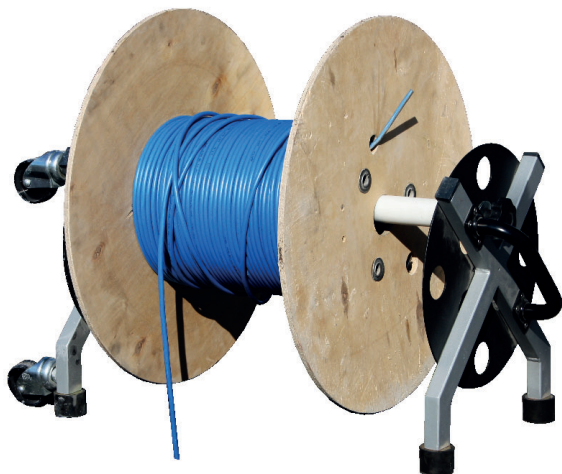


525/01**SVOLGITORE
UNWINDER**

Svolgitore per una o più bobine



Unwinder for one or more reels

**SCHEMA TECNICA**

Svolgitore da terra innovativo e versatile, di assoluta robustezza e resistenza che si presta a molteplici utilizzi, sia all'interno di officine che all'interno di cantieri civili ed industriali, quali: elettrici, meccanici e navali.

Di facile impiego è ideale per lo svolgimento di una o più bobine.

Realizzato in lamiera verniciata, lo svolgitore è caratterizzato da una struttura solida, compatta, con ingombro ridotto e stabile su qualsiasi superficie; è completamente smontabile e non necessita di manutenzione. Inoltre può essere utilizzato sia in posizione verticale che in posizione orizzontale.

E' costituito da due basi a crociera con gambe allungate con piedini in gomma antisdrucciolo che si differenziano l'una dall'altra per la presenza di quattro ruote piroettanti con freno in una e per la presenza della maniglia nell'altra. Su entrambe le basi è fissato un disco Ø300mm che in base alla posizione di utilizzo (verticale-orizzontale) funge o da disco portabobina o da fianco laterale.

L'asta centrale per il supporto della bobina, realizzata in lamiera cromata, è costituita da due parti avvitabili tra loro che si incastrano e fissano ai dischi laterali.

**DATA SHEET**

Innovative and versatile floor uncoiler of absolute strength and resistance that lends itself to multiple uses, both in workshops and in civil and industrial construction sites, such as: electrical, mechanical and naval.

Easy to use, it is ideal for unwinding one or more reels.

Made of painted sheet metal, the unwinder is characterised by a solid, compact, space-saving and stable structure on any surface; it can be completely disassembled and does not require maintenance. Furthermore, it can be used in both vertical and horizontal positions.

It consists of two cross-shaped bases with extended segments with non-slip rubber feet that differ from each other in the presence of four swivelling wheels with brakes in one and the presence of a handle in the other.

A Ø300mm disc is fixed to both bases, which, depending on the position of use (vertical-horizontal), acts either as a coil-holder disc or as a side panel.

The central rod for coil support, made of chrome-plated sheet metal, consists of two parts that can be screwed together and are fixed to the side discs.

**CARATTERISTICHE TECNICHE**

- ✓ Per uso professionale
- ✓ Facile da assemblare
- ✓ Ingombro ridotto
- ✓ Può lavorare in appoggio verticale
- ✓ Lunghezza tubo centrale: 700 mm
- ✓ Diametro Max bobina: Ø 500 mm
- ✓ Portata: 150 kg
- ✓ Peso: 9,0 kg

DIMENSIONI

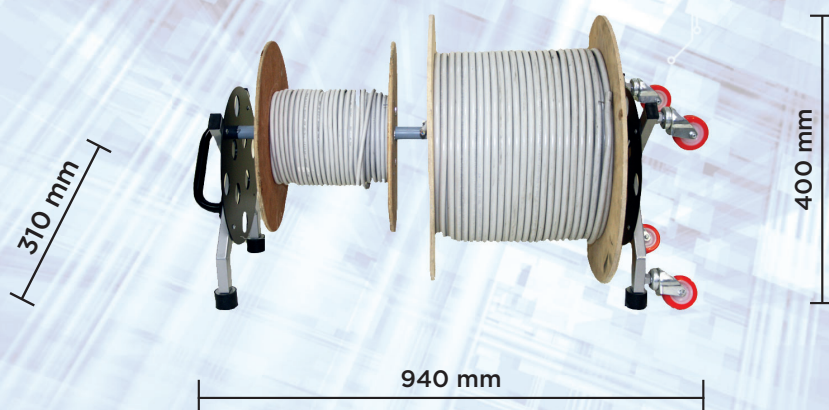
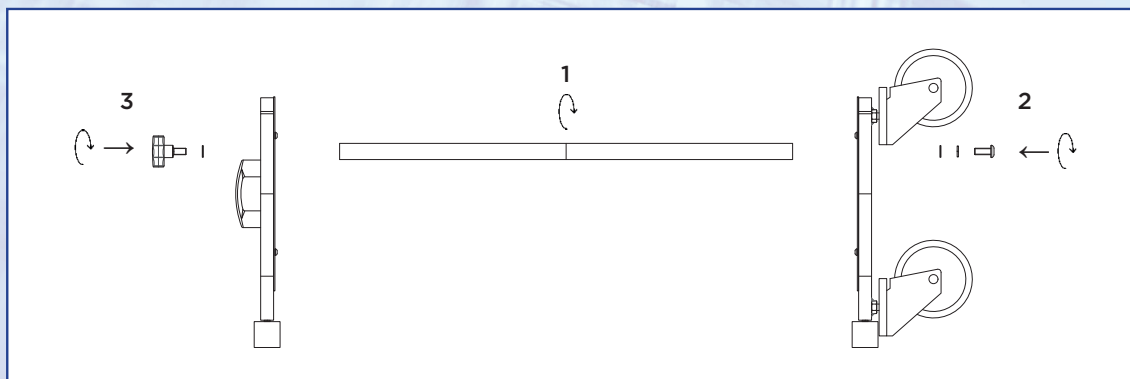
LxPxH= 940x310x400 mm

**TECHNICAL DATA**

- ✓ For professional use
- ✓ Easy to assemble
- ✓ Small footprint
- ✓ Usable also in vertical position
- ✓ Rolling tube lenght: 700 mm
- ✓ Max reel diameter: Ø 500 mm
- ✓ Max reel weight: 150 kg
- ✓ Weight: 9,0 kg

DIMENSIONS

LxDxH= 940x310x400 mm

**ISTRUZIONI DI MONTAGGIO****INSTALLATION INSTRUCTIONS**

art.



BARCODE

**525/01**

1



9,0 kg